

1. The metric prefixes (micro, pico, nano, ...) are given for ready reference on the inside front cover of the textbook (see also Table 1–2).

(a) Since  $1 \text{ km} = 1 \times 10^3 \text{ m}$  and  $1 \text{ m} = 1 \times 10^6 \mu\text{m}$ ,

$$1 \text{ km} = 10^3 \text{ m} = (10^3 \text{ m})(10^6 \mu\text{m/m}) = 10^9 \mu\text{m}.$$

The given measurement is  $1.0 \text{ km}$  (two significant figures), which implies our result should be written as  $1.0 \times 10^9 \mu\text{m}$ .

(b) We calculate the number of microns in 1 centimeter. Since  $1 \text{ cm} = 10^{-2} \text{ m}$ ,

$$1 \text{ cm} = 10^{-2} \text{ m} = (10^{-2} \text{ m})(10^6 \mu\text{m/m}) = 10^4 \mu\text{m}.$$

We conclude that the fraction of one centimeter equal to  $1.0 \mu\text{m}$  is  $1.0 \times 10^{-4}$ .

(c) Since  $1 \text{ yd} = (3 \text{ ft})(0.3048 \text{ m/ft}) = 0.9144 \text{ m}$ ,

$$1.0 \text{ yd} = (0.91 \text{ m})(10^6 \mu\text{m/m}) = 9.1 \times 10^5 \mu\text{m}.$$

2. (a) Using the conversion factors 1 inch = 2.54 cm exactly and 6 picas = 1 inch, we obtain

$$0.80 \text{ cm} = (0.80 \text{ cm}) \left( \frac{1 \text{ inch}}{2.54 \text{ cm}} \right) \left( \frac{6 \text{ picas}}{1 \text{ inch}} \right) \approx 1.9 \text{ picas}.$$

(b) With 12 points = 1 pica, we have

$$0.80 \text{ cm} = (0.80 \text{ cm}) \left( \frac{1 \text{ inch}}{2.54 \text{ cm}} \right) \left( \frac{6 \text{ picas}}{1 \text{ inch}} \right) \left( \frac{12 \text{ points}}{1 \text{ pica}} \right) \approx 23 \text{ points}.$$

3. Using the given conversion factors, we find

(a) the distance  $d$  in rods to be

$$d = 4.0 \text{ furlongs} = \frac{(4.0 \text{ furlongs})(201.168 \text{ m/furlong})}{5.0292 \text{ m/rod}} = 160 \text{ rods},$$

(b) and that distance in chains to be

$$d = \frac{(4.0 \text{ furlongs})(201.168 \text{ m/furlong})}{20.117 \text{ m/chain}} = 40 \text{ chains}.$$

4. The conversion factors 1 gry = 1/10 line, 1 line = 1/12 inch and 1 point = 1/72 inch imply that

$$1 \text{ gry} = (1/10)(1/12)(72 \text{ points}) = 0.60 \text{ point}.$$

Thus,  $1 \text{ gry}^2 = (0.60 \text{ point})^2 = 0.36 \text{ point}^2$ , which means that  $0.50 \text{ gry}^2 = 0.18 \text{ point}^2$ .

5. Various geometric formulas are given in Appendix E.

(a) Expressing the radius of the Earth as

$$R = (6.37 \times 10^6 \text{ m})(10^{-3} \text{ km/m}) = 6.37 \times 10^3 \text{ km},$$

its circumference is  $s = 2\pi R = 2\pi(6.37 \times 10^3 \text{ km}) = 4.00 \times 10^4 \text{ km}$ .

(b) The surface area of Earth is  $A = 4\pi R^2 = 4\pi (6.37 \times 10^3 \text{ km})^2 = 5.10 \times 10^8 \text{ km}^2$ .

(c) The volume of Earth is  $V = \frac{4\pi}{3} R^3 = \frac{4\pi}{3} (6.37 \times 10^3 \text{ km})^3 = 1.08 \times 10^{12} \text{ km}^3$ .

6. From Figure 1.6, we see that 212 S is equivalent to 258 W and  $212 - 32 = 180$  S is equivalent to  $216 - 60 = 156$  Z. The information allows us to convert S to W or Z.

(a) In units of W, we have

$$50.0 \text{ S} = (50.0 \text{ S}) \left( \frac{258 \text{ W}}{212 \text{ S}} \right) = 60.8 \text{ W}$$

(b) In units of Z, we have

$$50.0 \text{ S} = (50.0 \text{ S}) \left( \frac{156 \text{ Z}}{180 \text{ S}} \right) = 43.3 \text{ Z}$$

7. The volume of ice is given by the product of the semicircular surface area and the thickness. The area of the semicircle is  $A = \pi r^2/2$ , where  $r$  is the radius. Therefore, the volume is

$$V = \frac{\pi}{2} r^2 z$$

where  $z$  is the ice thickness. Since there are  $10^3$  m in 1 km and  $10^2$  cm in 1 m, we have

$$r = (2000 \text{ km}) \left( \frac{10^3 \text{ m}}{1 \text{ km}} \right) \left( \frac{10^2 \text{ cm}}{1 \text{ m}} \right) = 2000 \times 10^5 \text{ cm}.$$

In these units, the thickness becomes

$$z = 3000 \text{ m} = (3000 \text{ m}) \left( \frac{10^2 \text{ cm}}{1 \text{ m}} \right) = 3000 \times 10^2 \text{ cm}$$

which yields  $V = \frac{\pi}{2} (2000 \times 10^5 \text{ cm})^2 (3000 \times 10^2 \text{ cm}) = 1.9 \times 10^{22} \text{ cm}^3$ .

8. We make use of Table 1-6.

(a) We look at the first (“cahiz”) column: 1 fanega is equivalent to what amount of cahiz? We note from the already completed part of the table that 1 cahiz equals a dozen fanega. Thus,  $1 \text{ fanega} = \frac{1}{12} \text{ cahiz}$ , or  $8.33 \times 10^{-2} \text{ cahiz}$ . Similarly, “1 cahiz = 48 cuartilla” (in the already completed part) implies that  $1 \text{ cuartilla} = \frac{1}{48} \text{ cahiz}$ , or  $2.08 \times 10^{-2} \text{ cahiz}$ . Continuing in this way, the remaining entries in the first column are  $6.94 \times 10^{-3}$  and  $3.47 \times 10^{-3}$ .

(b) In the second (“fanega”) column, we similarly find 0.250,  $8.33 \times 10^{-2}$ , and  $4.17 \times 10^{-2}$  for the last three entries.

(c) In the third (“cuartilla”) column, we obtain 0.333 and 0.167 for the last two entries.

(d) Finally, in the fourth (“almude”) column, we get  $\frac{1}{2} = 0.500$  for the last entry.

(e) Since the conversion table indicates that 1 almude is equivalent to 2 medios, our amount of 7.00 almudes must be equal to 14.0 medios.

(f) Using the value ( $1 \text{ almude} = 6.94 \times 10^{-3} \text{ cahiz}$ ) found in part (a), we conclude that 7.00 almudes is equivalent to  $4.86 \times 10^{-2} \text{ cahiz}$ .

(g) Since each decimeter is 0.1 meter, then 55.501 cubic decimeters is equal to 0.055501  $\text{m}^3$  or 55501  $\text{cm}^3$ . Thus,  $7.00 \text{ almudes} = \frac{7.00}{12} \text{ fanega} = \frac{7.00}{12} (55501 \text{ cm}^3) = 3.24 \times 10^4 \text{ cm}^3$ .



9. We use the conversion factors found in Appendix D.

$$1 \text{ acre} \cdot \text{ft} = (43,560 \text{ ft}^2) \cdot \text{ft} = 43,560 \text{ ft}^3$$

Since 2 in. = (1/6) ft, the volume of water that fell during the storm is

$$V = (26 \text{ km}^2)(1/6 \text{ ft}) = (26 \text{ km}^2)(3281 \text{ ft/km})^2(1/6 \text{ ft}) = 4.66 \times 10^7 \text{ ft}^3.$$

Thus,

$$V = \frac{4.66 \times 10^7 \text{ ft}^3}{43,560 \text{ ft}^3/\text{acre} \cdot \text{ft}} = 1.1 \times 10^3 \text{ acre} \cdot \text{ft}.$$

10. A day is equivalent to 86400 seconds and a meter is equivalent to a million micrometers, so

$$\frac{(3.7 \text{ m})(10^6 \mu\text{m/m})}{(14 \text{ day})(86400 \text{ s/day})} = 3.1 \mu\text{m/s}.$$

11. A week is 7 days, each of which has 24 hours, and an hour is equivalent to 3600 seconds. Thus, two weeks (a fortnight) is 1209600 s. By definition of the micro prefix, this is roughly  $1.21 \times 10^{12} \mu\text{s}$ .

12. The metric prefixes (micro ( $\mu$ ), pico, nano, ...) are given for ready reference on the inside front cover of the textbook (also, Table 1–2).

$$(a) 1 \mu\text{century} = (10^{-6} \text{ century}) \left( \frac{100 \text{ y}}{1 \text{ century}} \right) \left( \frac{365 \text{ day}}{1 \text{ y}} \right) \left( \frac{24 \text{ h}}{1 \text{ day}} \right) \left( \frac{60 \text{ min}}{1 \text{ h}} \right) = 52.6 \text{ min}.$$

(b) The percent difference is therefore

$$\frac{52.6 \text{ min} - 50 \text{ min}}{52.6 \text{ min}} = 4.9\%.$$

13. (a) Presuming that a French decimal day is equivalent to a regular day, then the ratio of weeks is simply  $10/7$  or (to 3 significant figures) 1.43.

(b) In a regular day, there are 86400 seconds, but in the French system described in the problem, there would be  $10^5$  seconds. The ratio is therefore 0.864.

14. We denote the pulsar rotation rate  $f$  (for frequency).

$$f = \frac{1 \text{ rotation}}{1.55780644887275 \times 10^{-3} \text{ s}}$$

(a) Multiplying  $f$  by the time-interval  $t = 7.00$  days (which is equivalent to 604800 s, if we ignore *significant figure* considerations for a moment), we obtain the number of rotations:

$$N = \left( \frac{1 \text{ rotation}}{1.55780644887275 \times 10^{-3} \text{ s}} \right) (604800 \text{ s}) = 388238218.4$$

which should now be rounded to  $3.88 \times 10^8$  rotations since the time-interval was specified in the problem to three significant figures.

(b) We note that the problem specifies the *exact* number of pulsar revolutions (one million). In this case, our unknown is  $t$ , and an equation similar to the one we set up in part (a) takes the form  $N = ft$ , or

$$1 \times 10^6 = \left( \frac{1 \text{ rotation}}{1.55780644887275 \times 10^{-3} \text{ s}} \right) t$$

which yields the result  $t = 1557.80644887275 \text{ s}$  (though students who do this calculation on their calculator might not obtain those last several digits).

(c) Careful reading of the problem shows that the time-uncertainty *per revolution* is  $\pm 3 \times 10^{-17} \text{ s}$ . We therefore expect that as a result of one million revolutions, the uncertainty should be  $(\pm 3 \times 10^{-17})(1 \times 10^6) = \pm 3 \times 10^{-11} \text{ s}$ .

15. The time on any of these clocks is a straight-line function of that on another, with slopes  $\neq 1$  and  $y$ -intercepts  $\neq 0$ . From the data in the figure we deduce

$$t_C = \frac{2}{7}t_B + \frac{594}{7}, \quad t_B = \frac{33}{40}t_A - \frac{662}{5}.$$

These are used in obtaining the following results.

(a) We find

$$t'_B - t_B = \frac{33}{40}(t'_A - t_A) = 495 \text{ s}$$

when  $t'_A - t_A = 600 \text{ s}$ .

(b) We obtain  $t'_C - t_C = \frac{2}{7}(t'_B - t_B) = \frac{2}{7}(495) = 141 \text{ s}$ .

(c) Clock  $B$  reads  $t_B = (33/40)(400) - (662/5) \approx 198 \text{ s}$  when clock  $A$  reads  $t_A = 400 \text{ s}$ .

(d) From  $t_C = 15 = (2/7)t_B + (594/7)$ , we get  $t_B \approx -245 \text{ s}$ .

16. Since a change of longitude equal to  $360^\circ$  corresponds to a 24 hour change, then one expects to change longitude by  $360^\circ / 24 = 15^\circ$  before resetting one's watch by 1.0 h.



17. None of the clocks advance by exactly 24 h in a 24-h period but this is not the most important criterion for judging their quality for measuring time intervals. What is important is that the clock advance by the same amount in each 24-h period. The clock reading can then easily be adjusted to give the correct interval. If the clock reading jumps around from one 24-h period to another, it cannot be corrected since it would be impossible to tell what the correction should be. The following gives the corrections (in seconds) that must be applied to the reading on each clock for each 24-h period. The entries were determined by subtracting the clock reading at the end of the interval from the clock reading at the beginning.

CLOCK	Sun. -Mon.	Mon. -Tues.	Tues. -Wed.	Wed. -Thurs.	Thurs. -Fri.	Fri. -Sat.
A	-16	-16	-15	-17	-15	-15
B	-3	+5	-10	+5	+6	-7
C	-58	-58	-58	-58	-58	-58
D	+67	+67	+67	+67	+67	+67
E	+70	+55	+2	+20	+10	+10

Clocks C and D are both good timekeepers in the sense that each is consistent in its daily drift (relative to WWF time); thus, C and D are easily made “perfect” with simple and predictable corrections. The correction for clock C is less than the correction for clock D, so we judge clock C to be the best and clock D to be the next best. The correction that must be applied to clock A is in the range from 15 s to 17s. For clock B it is the range from -5 s to +10 s, for clock E it is in the range from -70 s to -2 s. After C and D, A has the smallest range of correction, B has the next smallest range, and E has the greatest range. From best to worst, the ranking of the clocks is C, D, A, B, E.

18. The last day of the 20 centuries is longer than the first day by


$$(20 \text{ century}) (0.001 \text{ s/century}) = 0.02 \text{ s.}$$

The average day during the 20 centuries is  $(0 + 0.02)/2 = 0.01 \text{ s}$  longer than the first day. Since the increase occurs uniformly, the cumulative effect  $T$  is

$$\begin{aligned} T &= (\text{average increase in length of a day})(\text{number of days}) \\ &= \left( \frac{0.01 \text{ s}}{\text{day}} \right) \left( \frac{365.25 \text{ day}}{\text{y}} \right) (2000 \text{ y}) \\ &= 7305 \text{ s} \end{aligned}$$

or roughly two hours.

19. When the Sun first disappears while lying down, your line of sight to the top of the Sun is tangent to the Earth's surface at point A shown in the figure. As you stand, elevating your eyes by a height  $h$ , the line of sight to the Sun is tangent to the Earth's surface at point B.

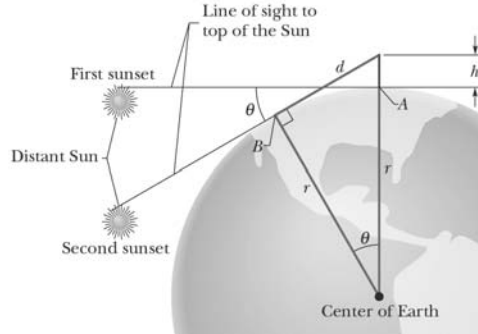

Let  $d$  be the distance from point B to your eyes. From Pythagorean theorem, we have

$$d^2 + r^2 = (r + h)^2 = r^2 + 2rh + h^2$$

or  $d^2 = 2rh + h^2$ , where  $r$  is the radius of the Earth. Since  $r \gg h$ , the second term can be dropped, leading to  $d^2 \approx 2rh$ . Now the angle between the two radii to the two tangent points A and B is  $\theta$ , which is also the angle through which the Sun moves about Earth during the time interval  $t = 11.1$  s. The value of  $\theta$  can be obtained by using

$$\frac{\theta}{360^\circ} = \frac{t}{24 \text{ h}}.$$

This yields

$$\theta = \frac{(360^\circ)(11.1 \text{ s})}{(24 \text{ h})(60 \text{ min/h})(60 \text{ s/min})} = 0.04625^\circ.$$

Using  $d = r \tan \theta$ , we have  $d^2 = r^2 \tan^2 \theta = 2rh$ , or

$$r = \frac{2h}{\tan^2 \theta}$$

Using the above value for  $\theta$  and  $h = 1.7$  m, we have  $r = 5.2 \times 10^6$  m.

20. The density of gold is

$$\rho = \frac{m}{V} = \frac{19.32 \text{ g}}{1 \text{ cm}^3} = 19.32 \text{ g/cm}^3.$$

(a) We take the volume of the leaf to be its area  $A$  multiplied by its thickness  $z$ . With density  $\rho = 19.32 \text{ g/cm}^3$  and mass  $m = 27.63 \text{ g}$ , the volume of the leaf is found to be

$$V = \frac{m}{\rho} = 1.430 \text{ cm}^3.$$

We convert the volume to SI units:

$$V = (1.430 \text{ cm}^3) \left( \frac{1 \text{ m}}{100 \text{ cm}} \right)^3 = 1.430 \times 10^{-6} \text{ m}^3.$$

Since  $V = Az$  with  $z = 1 \times 10^{-6} \text{ m}$  (metric prefixes can be found in Table 1–2), we obtain

$$A = \frac{1.430 \times 10^{-6} \text{ m}^3}{1 \times 10^{-6} \text{ m}} = 1.430 \text{ m}^2.$$

(b) The volume of a cylinder of length  $\ell$  is  $V = A\ell$  where the cross-section area is that of a circle:  $A = \pi r^2$ . Therefore, with  $r = 2.500 \times 10^{-6} \text{ m}$  and  $V = 1.430 \times 10^{-6} \text{ m}^3$ , we obtain

$$\ell = \frac{V}{\pi r^2} = 7.284 \times 10^4 \text{ m} = 72.84 \text{ km}.$$

21. We introduce the notion of density:

$$\rho = \frac{m}{V}$$

and convert to SI units:  $1 \text{ g} = 1 \times 10^{-3} \text{ kg}$ .

(a) For volume conversion, we find  $1 \text{ cm}^3 = (1 \times 10^{-2} \text{ m})^3 = 1 \times 10^{-6} \text{ m}^3$ . Thus, the density in  $\text{kg/m}^3$  is

$$1 \text{ g/cm}^3 = \left( \frac{1 \text{ g}}{\text{cm}^3} \right) \left( \frac{10^{-3} \text{ kg}}{\text{g}} \right) \left( \frac{\text{cm}^3}{10^{-6} \text{ m}^3} \right) = 1 \times 10^3 \text{ kg/m}^3.$$

Thus, the mass of a cubic meter of water is 1000 kg.

(b) We divide the mass of the water by the time taken to drain it. The mass is found from  $M = \rho V$  (the product of the volume of water and its density):

$$M = (5700 \text{ m}^3) (1 \times 10^3 \text{ kg/m}^3) = 5.70 \times 10^6 \text{ kg}.$$

The time is  $t = (10 \text{ h})(3600 \text{ s/h}) = 3.6 \times 10^4 \text{ s}$ , so the *mass flow rate*  $R$  is

$$R = \frac{M}{t} = \frac{5.70 \times 10^6 \text{ kg}}{3.6 \times 10^4 \text{ s}} = 158 \text{ kg/s}.$$

22. (a) We find the volume in cubic centimeters

$$193 \text{ gal} = (193 \text{ gal}) \left( \frac{231 \text{ in}^3}{1 \text{ gal}} \right) \left( \frac{2.54 \text{ cm}}{1 \text{ in}} \right)^3 = 7.31 \times 10^5 \text{ cm}^3$$

and subtract this from  $1 \times 10^6 \text{ cm}^3$  to obtain  $2.69 \times 10^5 \text{ cm}^3$ . The conversion  $\text{gal} \rightarrow \text{in}^3$  is given in Appendix D (immediately below the table of Volume conversions).

(b) The volume found in part (a) is converted (by dividing by  $(100 \text{ cm/m})^3$ ) to  $0.731 \text{ m}^3$ , which corresponds to a mass of

$$(1000 \text{ kg/m}^3) (0.731 \text{ m}^3) = 731 \text{ kg}$$

using the density given in the problem statement. At a rate of  $0.0018 \text{ kg/min}$ , this can be filled in

$$\frac{731 \text{ kg}}{0.0018 \text{ kg/min}} = 4.06 \times 10^5 \text{ min} = 0.77 \text{ y}$$

after dividing by the number of minutes in a year (365 days)(24 h/day) (60 min/h).

23. If  $M_E$  is the mass of Earth,  $m$  is the average mass of an atom in Earth, and  $N$  is the number of atoms, then  $M_E = Nm$  or  $N = M_E/m$ . We convert mass  $m$  to kilograms using Appendix D ( $1 \text{ u} = 1.661 \times 10^{-27} \text{ kg}$ ). Thus,

$$N = \frac{M_E}{m} = \frac{5.98 \times 10^{24} \text{ kg}}{(40 \text{ u}) (1.661 \times 10^{-27} \text{ kg/u})} = 9.0 \times 10^{49}.$$

24. (a) The volume of the cloud is  $(3000 \text{ m})\pi(1000 \text{ m})^2 = 9.4 \times 10^9 \text{ m}^3$ . Since each cubic meter of the cloud contains from  $50 \times 10^6$  to  $500 \times 10^6$  water drops, then we conclude that the entire cloud contains from  $4.7 \times 10^{18}$  to  $4.7 \times 10^{19}$  drops. Since the volume of each drop is  $\frac{4}{3}\pi(10 \times 10^{-6} \text{ m})^3 = 4.2 \times 10^{-15} \text{ m}^3$ , then the total volume of water in a cloud is from  $2 \times 10^3$  to  $2 \times 10^4 \text{ m}^3$ .

(b) Using the fact that  $1 \text{ L} = 1 \times 10^3 \text{ cm}^3 = 1 \times 10^{-3} \text{ m}^3$ , the amount of water estimated in part (a) would fill from  $2 \times 10^6$  to  $2 \times 10^7$  bottles.

(c) At 1000 kg for every cubic meter, the mass of water is from two million to twenty million kilograms. The coincidence in numbers between the results of parts (b) and (c) of this problem is due to the fact that each liter has a mass of one kilogram when water is at its normal density (under standard conditions).



25. We introduce the notion of density,  $\rho = m/V$ , and convert to SI units:  $1000 \text{ g} = 1 \text{ kg}$ , and  $100 \text{ cm} = 1 \text{ m}$ .

(a) The density  $\rho$  of a sample of iron is

$$\rho = (7.87 \text{ g/cm}^3) \left( \frac{1 \text{ kg}}{1000 \text{ g}} \right) \left( \frac{100 \text{ cm}}{1 \text{ m}} \right)^3 = 7870 \text{ kg/m}^3.$$

If we ignore the empty spaces between the close-packed spheres, then the density of an individual iron atom will be the same as the density of any iron sample. That is, if  $M$  is the mass and  $V$  is the volume of an atom, then

$$V = \frac{M}{\rho} = \frac{9.27 \times 10^{-26} \text{ kg}}{7.87 \times 10^3 \text{ kg/m}^3} = 1.18 \times 10^{-29} \text{ m}^3.$$

(b) We set  $V = 4\pi R^3/3$ , where  $R$  is the radius of an atom (Appendix E contains several geometry formulas). Solving for  $R$ , we find

$$R = \left( \frac{3V}{4\pi} \right)^{1/3} = \left( \frac{3(1.18 \times 10^{-29} \text{ m}^3)}{4\pi} \right)^{1/3} = 1.41 \times 10^{-10} \text{ m}.$$

The center-to-center distance between atoms is twice the radius, or  $2.82 \times 10^{-10} \text{ m}$ .

26. If we estimate the “typical” large domestic cat mass as 10 kg, and the “typical” atom (in the cat) as  $10 \text{ u} \approx 2 \times 10^{-26} \text{ kg}$ , then there are roughly  $(10 \text{ kg}) / (2 \times 10^{-26} \text{ kg}) \approx 5 \times 10^{26}$  atoms. This is close to being a factor of a thousand greater than Avogadro’s number. Thus this is roughly a kilomole of atoms.

27. According to Appendix D, a nautical mile is 1.852 km, so 24.5 nautical miles would be 45.374 km. Also, according to Appendix D, a mile is 1.609 km, so 24.5 miles is 39.4205 km. The difference is 5.95 km.

28. The metric prefixes (micro ( $\mu$ ), pico, nano, ...) are given for ready reference on the inside front cover of the textbook (see also Table 1-2). The surface area  $A$  of each grain of sand of radius  $r = 50 \mu\text{m} = 50 \times 10^{-6} \text{ m}$  is given by  $A = 4\pi(50 \times 10^{-6})^2 = 3.14 \times 10^{-8} \text{ m}^2$  (Appendix E contains a variety of geometry formulas). We introduce the notion of density,  $\rho = m/V$ , so that the mass can be found from  $m = \rho V$ , where  $\rho = 2600 \text{ kg/m}^3$ . Thus, using  $V = 4\pi r^3/3$ , the mass of each grain is

$$m = \rho V = \rho \left( \frac{4\pi r^3}{3} \right) = \left( 2600 \frac{\text{kg}}{\text{m}^3} \right) \frac{4\pi (50 \times 10^{-6} \text{ m})^3}{3} = 1.36 \times 10^{-9} \text{ kg}.$$

We observe that (because a cube has six equal faces) the indicated surface area is  $6 \text{ m}^2$ . The number of spheres (the grains of sand)  $N$  that have a total surface area of  $6 \text{ m}^2$  is given by

$$N = \frac{6 \text{ m}^2}{3.14 \times 10^{-8} \text{ m}^2} = 1.91 \times 10^8.$$

Therefore, the total mass  $M$  is  $M = Nm = (1.91 \times 10^8) (1.36 \times 10^{-9} \text{ kg}) = 0.260 \text{ kg}$ .

29. The volume of the section is  $(2500 \text{ m})(800 \text{ m})(2.0 \text{ m}) = 4.0 \times 10^6 \text{ m}^3$ . Letting “ $d$ ” stand for the thickness of the mud after it has (uniformly) distributed in the valley, then its volume there would be  $(400 \text{ m})(400 \text{ m})d$ . Requiring these two volumes to be equal, we can solve for  $d$ . Thus,  $d = 25 \text{ m}$ . The volume of a small part of the mud over a patch of area of  $4.0 \text{ m}^2$  is  $(4.0)d = 100 \text{ m}^3$ . Since each cubic meter corresponds to a mass of 1900 kg (stated in the problem), then the mass of that small part of the mud is  $1.9 \times 10^5 \text{ kg}$ .

30. To solve the problem, we note that the first derivative of the function with respect to time gives the rate. Setting the rate to zero gives the time at which an extreme value of the variable mass occurs; here that extreme value is a maximum.

(a) Differentiating  $m(t) = 5.00t^{0.8} - 3.00t + 20.00$  with respect to  $t$  gives

$$\frac{dm}{dt} = 4.00t^{-0.2} - 3.00.$$

The water mass is the greatest when  $dm/dt = 0$ , or at  $t = (4.00/3.00)^{1/0.2} = 4.21$  s.

(b) At  $t = 4.21$  s, the water mass is

$$m(t = 4.21 \text{ s}) = 5.00(4.21)^{0.8} - 3.00(4.21) + 20.00 = 23.2 \text{ g}.$$

(c) The rate of mass change at  $t = 2.00$  s is

$$\begin{aligned} \left. \frac{dm}{dt} \right|_{t=2.00 \text{ s}} &= [4.00(2.00)^{-0.2} - 3.00] \text{ g/s} = 0.48 \text{ g/s} = 0.48 \frac{\text{g}}{\text{s}} \cdot \frac{1 \text{ kg}}{1000 \text{ g}} \cdot \frac{60 \text{ s}}{1 \text{ min}} \\ &= 2.89 \times 10^{-2} \text{ kg/min.} \end{aligned}$$

(d) Similarly, the rate of mass change at  $t = 5.00$  s is

$$\begin{aligned} \left. \frac{dm}{dt} \right|_{t=5.00 \text{ s}} &= [4.00(5.00)^{-0.2} - 3.00] \text{ g/s} = -0.101 \text{ g/s} = -0.101 \frac{\text{g}}{\text{s}} \cdot \frac{1 \text{ kg}}{1000 \text{ g}} \cdot \frac{60 \text{ s}}{1 \text{ min}} \\ &= -6.05 \times 10^{-3} \text{ kg/min.} \end{aligned}$$

31. The mass density of the candy is

$$\rho = \frac{m}{V} = \frac{0.0200 \text{ g}}{50.0 \text{ mm}^3} = 4.00 \times 10^{-4} \text{ g/mm}^3 = 4.00 \times 10^{-4} \text{ kg/cm}^3.$$

If we neglect the volume of the empty spaces between the candies, then the total mass of the candies in the container when filled to height  $h$  is  $M = \rho Ah$ , where  $A = (14.0 \text{ cm})(17.0 \text{ cm}) = 238 \text{ cm}^2$  is the base area of the container that remains unchanged. Thus, the rate of mass change is given by

$$\begin{aligned} \frac{dM}{dt} &= \frac{d(\rho Ah)}{dt} = \rho A \frac{dh}{dt} = (4.00 \times 10^{-4} \text{ kg/cm}^3)(238 \text{ cm}^2)(0.250 \text{ cm/s}) \\ &= 0.0238 \text{ kg/s} = 1.43 \text{ kg/min.} \end{aligned}$$

32. Table 7 can be completed as follows:

(a) It should be clear that the first column (under “wey”) is the reciprocal of the first row – so that  $\frac{9}{10} = 0.900$ ,  $\frac{3}{40} = 7.50 \times 10^{-2}$ , and so forth. Thus, 1 pottle =  $1.56 \times 10^{-3}$  wey and 1 gill =  $8.32 \times 10^{-6}$  wey are the last two entries in the first column.

(b) In the second column (under “chaldron”), clearly we have 1 chaldron = 1 caldron (that is, the entries along the “diagonal” in the table must be 1’s). To find out how many chaldron are equal to one bag, we note that 1 wey =  $10/9$  chaldron =  $40/3$  bag so that  $\frac{1}{12}$  chaldron = 1 bag. Thus, the next entry in that second column is  $\frac{1}{12} = 8.33 \times 10^{-2}$ . Similarly, 1 pottle =  $1.74 \times 10^{-3}$  chaldron and 1 gill =  $9.24 \times 10^{-6}$  chaldron.

(c) In the third column (under “bag”), we have 1 chaldron = 12.0 bag, 1 bag = 1 bag, 1 pottle =  $2.08 \times 10^{-2}$  bag, and 1 gill =  $1.11 \times 10^{-4}$  bag.

(d) In the fourth column (under “pottle”), we find 1 chaldron = 576 pottle, 1 bag = 48 pottle, 1 pottle = 1 pottle, and 1 gill =  $5.32 \times 10^{-3}$  pottle.

(e) In the last column (under “gill”), we obtain 1 chaldron =  $1.08 \times 10^5$  gill, 1 bag =  $9.02 \times 10^3$  gill, 1 pottle = 188 gill, and, of course, 1 gill = 1 gill.

(f) Using the information from part (c), 1.5 chaldron =  $(1.5)(12.0) = 18.0$  bag. And since each bag is  $0.1091 \text{ m}^3$  we conclude 1.5 chaldron =  $(18.0)(0.1091) = 1.96 \text{ m}^3$ .



33. The first two conversions are easy enough that a *formal* conversion is not especially called for, but in the interest of *practice makes perfect* we go ahead and proceed formally:

$$(a) \ 11 \text{ tuffets} = (11 \text{ tuffets}) \left( \frac{2 \text{ peck}}{1 \text{ tuffet}} \right) = 22 \text{ pecks}.$$

$$(b) \ 11 \text{ tuffets} = (11 \text{ tuffets}) \left( \frac{0.50 \text{ Imperial bushel}}{1 \text{ tuffet}} \right) = 5.5 \text{ Imperial bushels}.$$

$$(c) \ 11 \text{ tuffets} = (5.5 \text{ Imperial bushel}) \left( \frac{36.3687 \text{ L}}{1 \text{ Imperial bushel}} \right) \approx 200 \text{ L}.$$

34. (a) Using the fact that the area  $A$  of a rectangle is (width)  $\times$  (length), we find

$$\begin{aligned} A_{\text{total}} &= (3.00 \text{ acre}) + (25.0 \text{ perch})(4.00 \text{ perch}) \\ &= (3.00 \text{ acre}) \left( \frac{(40 \text{ perch})(4 \text{ perch})}{1 \text{ acre}} \right) + 100 \text{ perch}^2 \\ &= 580 \text{ perch}^2. \end{aligned}$$

We multiply this by the perch<sup>2</sup>  $\rightarrow$  rood conversion factor (1 rood/40 perch<sup>2</sup>) to obtain the answer:  $A_{\text{total}} = 14.5$  roods.

(b) We convert our intermediate result in part (a):

$$A_{\text{total}} = (580 \text{ perch}^2) \left( \frac{16.5 \text{ ft}}{1 \text{ perch}} \right)^2 = 1.58 \times 10^5 \text{ ft}^2.$$

Now, we use the feet  $\rightarrow$  meters conversion given in Appendix D to obtain

$$A_{\text{total}} = (1.58 \times 10^5 \text{ ft}^2) \left( \frac{1 \text{ m}}{3.281 \text{ ft}} \right)^2 = 1.47 \times 10^4 \text{ m}^2.$$

35. (a) Dividing 750 miles by the expected “40 miles per gallon” leads the tourist to believe that the car should need 18.8 gallons (in the U.S.) for the trip.

(b) Dividing the two numbers given (to high precision) in the problem (and rounding off) gives the conversion between U.K. and U.S. gallons. The U.K. gallon is larger than the U.S gallon by a factor of 1.2. Applying this to the result of part (a), we find the answer for part (b) is 22.5 gallons.

36. The customer expects a volume  $V_1 = 20 \times 7056 \text{ in}^3$  and receives  $V_2 = 20 \times 5826 \text{ in}^3$ , the difference being  $\Delta V = V_1 - V_2 = 24600 \text{ in}^3$ , or

$$\Delta V = (24600 \text{ in}^3) \left( \frac{2.54 \text{ cm}}{1 \text{ inch}} \right)^3 \left( \frac{1 \text{ L}}{1000 \text{ cm}^3} \right) = 403 \text{ L}$$

where Appendix D has been used.

37. (a) Using Appendix D, we have  $1 \text{ ft} = 0.3048 \text{ m}$ ,  $1 \text{ gal} = 231 \text{ in.}^3$ , and  $1 \text{ in.}^3 = 1.639 \times 10^{-2} \text{ L}$ . From the latter two items, we find that  $1 \text{ gal} = 3.79 \text{ L}$ . Thus, the quantity  $460 \text{ ft}^2/\text{gal}$  becomes

$$460 \text{ ft}^2/\text{gal} = \left( \frac{460 \text{ ft}^2}{\text{gal}} \right) \left( \frac{1 \text{ m}}{3.28 \text{ ft}} \right)^2 \left( \frac{1 \text{ gal}}{3.79 \text{ L}} \right) = 11.3 \text{ m}^2/\text{L}.$$

(b) Also, since  $1 \text{ m}^3$  is equivalent to  $1000 \text{ L}$ , our result from part (a) becomes

$$11.3 \text{ m}^2/\text{L} = \left( \frac{11.3 \text{ m}^2}{\text{L}} \right) \left( \frac{1000 \text{ L}}{1 \text{ m}^3} \right) = 1.13 \times 10^4 \text{ m}^{-1}.$$

(c) The inverse of the original quantity is  $(460 \text{ ft}^2/\text{gal})^{-1} = 2.17 \times 10^{-3} \text{ gal/ft}^2$ .

(d) The answer in (c) represents the volume of the paint (in gallons) needed to cover a square foot of area. From this, we could also figure the paint thickness [it turns out to be about a tenth of a millimeter, as one sees by taking the reciprocal of the answer in part (b)].

38. The total volume  $V$  of the real house is that of a triangular prism (of height  $h = 3.0$  m and base area  $A = 20 \times 12 = 240 \text{ m}^2$ ) in addition to a rectangular box (height  $h' = 6.0$  m and same base). Therefore,

$$V = \frac{1}{2} hA + h'A = \left( \frac{h}{2} + h' \right) A = 1800 \text{ m}^3.$$

(a) Each dimension is reduced by a factor of  $1/12$ , and we find

$$V_{\text{doll}} = (1800 \text{ m}^3) \left( \frac{1}{12} \right)^3 \approx 1.0 \text{ m}^3.$$

(b) In this case, each dimension (relative to the real house) is reduced by a factor of  $1/144$ . Therefore,

$$V_{\text{miniature}} = (1800 \text{ m}^3) \left( \frac{1}{144} \right)^3 \approx 6.0 \times 10^{-4} \text{ m}^3.$$

39. Using the (exact) conversion  $2.54 \text{ cm} = 1 \text{ in.}$  we find that  $1 \text{ ft} = (12)(2.54)/100 = 0.3048 \text{ m}$  (which also can be found in Appendix D). The volume of a cord of wood is  $8 \times 4 \times 4 = 128 \text{ ft}^3$ , which we convert (multiplying by  $0.3048^3$ ) to  $3.6 \text{ m}^3$ . Therefore, one cubic meter of wood corresponds to  $1/3.6 \approx 0.3$  cord.

40. (a) In atomic mass units, the mass of one molecule is  $(16 + 1 + 1)\text{u} = 18\text{ u}$ . Using Eq. 1-9, we find

$$18\text{u} = (18\text{u}) \left( \frac{1.6605402 \times 10^{-27} \text{ kg}}{1\text{u}} \right) = 3.0 \times 10^{-26} \text{ kg}.$$

(b) We divide the total mass by the mass of each molecule and obtain the (approximate) number of water molecules:

$$N \approx \frac{1.4 \times 10^{21}}{3.0 \times 10^{-26}} \approx 5 \times 10^{46}.$$



41. (a) The difference between the total amounts in “freight” and “displacement” tons,  $(8 - 7)(73) = 73$  barrels bulk, represents the extra M&M’s that are shipped. Using the conversions in the problem, this is equivalent to  $(73)(0.1415)(28.378) = 293$  U.S. bushels.

(b) The difference between the total amounts in “register” and “displacement” tons,  $(20 - 7)(73) = 949$  barrels bulk, represents the extra M&M’s are shipped. Using the conversions in the problem, this is equivalent to  $(949)(0.1415)(28.378) = 3.81 \times 10^3$  U.S. bushels.

42. (a) The receptacle is a volume of  $(40 \text{ cm})(40 \text{ cm})(30 \text{ cm}) = 48000 \text{ cm}^3 = 48 \text{ L} = (48)(16)/11.356 = 67.63$  standard bottles, which is a little more than 3 nebuchadnezzars (the largest bottle indicated). The remainder, 7.63 standard bottles, is just a little less than 1 methuselah. Thus, the answer to part (a) is 3 nebuchadnezzars and 1 methuselah.

(b) Since 1 methuselah = 8 standard bottles, then the extra amount is  $8 - 7.63 = 0.37$  standard bottle.

(c) Using the conversion factor 16 standard bottles = 11.356 L, we have

$$0.37 \text{ standard bottle} = (0.37 \text{ standard bottle}) \left( \frac{11.356 \text{ L}}{16 \text{ standard bottles}} \right) = 0.26 \text{ L}.$$

43. The volume of one unit is  $1 \text{ cm}^3 = 1 \times 10^{-6} \text{ m}^3$ , so the volume of a mole of them is  $6.02 \times 10^{23} \text{ cm}^3 = 6.02 \times 10^{17} \text{ m}^3$ . The cube root of this number gives the edge length:  $8.4 \times 10^5 \text{ m}$ . This is equivalent to roughly  $8 \times 10^2$  kilometers.

44. Equation 1-9 gives (to very high precision!) the conversion from atomic mass units to kilograms. Since this problem deals with the ratio of total mass (1.0 kg) divided by the mass of one atom (1.0 u, but converted to kilograms), then the computation reduces to simply taking the reciprocal of the number given in Eq. 1-9 and rounding off appropriately. Thus, the answer is  $6.0 \times 10^{26}$ .

45. We convert meters to astronomical units, and seconds to minutes, using

$$1000 \text{ m} = 1 \text{ km}$$

$$1 \text{ AU} = 1.50 \times 10^8 \text{ km}$$

$$60 \text{ s} = 1 \text{ min}.$$

Thus,  $3.0 \times 10^8 \text{ m/s}$  becomes

$$\left( \frac{3.0 \times 10^8 \text{ m}}{\text{s}} \right) \left( \frac{1 \text{ km}}{1000 \text{ m}} \right) \left( \frac{\text{AU}}{1.50 \times 10^8 \text{ km}} \right) \left( \frac{60 \text{ s}}{\text{min}} \right) = 0.12 \text{ AU/min}.$$

46. The volume of the water that fell is

$$\begin{aligned} V &= (26 \text{ km}^2) (2.0 \text{ in.}) = (26 \text{ km}^2) \left( \frac{1000 \text{ m}}{1 \text{ km}} \right)^2 (2.0 \text{ in.}) \left( \frac{0.0254 \text{ m}}{1 \text{ in.}} \right) \\ &= (26 \times 10^6 \text{ m}^2) (0.0508 \text{ m}) \\ &= 1.3 \times 10^6 \text{ m}^3. \end{aligned}$$

We write the mass-per-unit-volume (density) of the water as:

$$\rho = \frac{m}{V} = 1 \times 10^3 \text{ kg/m}^3.$$

The mass of the water that fell is therefore given by  $m = \rho V$ :

$$m = (1 \times 10^3 \text{ kg/m}^3) (1.3 \times 10^6 \text{ m}^3) = 1.3 \times 10^9 \text{ kg}.$$

47. A million milligrams comprise a kilogram, so 2.3 kg/week is  $2.3 \times 10^6$  mg/week. Figuring 7 days a week, 24 hours per day, 3600 second per hour, we find 604800 seconds are equivalent to one week. Thus,  $(2.3 \times 10^6 \text{ mg/week}) / (604800 \text{ s/week}) = 3.8 \text{ mg/s}$ .

48. The mass of the pig is 3.108 slugs, or  $(3.108)(14.59) = 45.346$  kg. Referring now to the corn, a U.S. bushel is 35.238 liters. Thus, a value of 1 for the *corn-hog ratio* would be equivalent to  $35.238/45.346 = 0.7766$  in the indicated metric units. Therefore, a value of 5.7 for the *ratio* corresponds to  $5.7(0.777) \approx 4.4$  in the indicated metric units.



49. Two jalapeño peppers have spiciness = 8000 SHU, and this amount multiplied by 400 (the number of people) is  $3.2 \times 10^6$  SHU, which is roughly ten times the SHU value for a single habanero pepper. More precisely, 10.7 habanero peppers will provide that total required SHU value.

50. The volume removed in one year is

$$V = (75 \times 10^4 \text{ m}^2) (26 \text{ m}) \approx 2 \times 10^7 \text{ m}^3$$

which we convert to cubic kilometers:  $V = (2 \times 10^7 \text{ m}^3) \left( \frac{1 \text{ km}}{1000 \text{ m}} \right)^3 = 0.020 \text{ km}^3$ .

51. The number of seconds in a year is  $3.156 \times 10^7$ . This is listed in Appendix D and results from the product

$$(365.25 \text{ day/y}) (24 \text{ h/day}) (60 \text{ min/h}) (60 \text{ s/min}).$$

(a) The number of shakes in a second is  $10^8$ ; therefore, there are indeed more shakes per second than there are seconds per year.

(b) Denoting the age of the universe as 1 u-day (or 86400 u-sec), then the time during which humans have existed is given by

$$\frac{10^6}{10^{10}} = 10^{-4} \text{ u-day},$$

which may also be expressed as  $(10^{-4} \text{ u-day}) \left( \frac{86400 \text{ u-sec}}{1 \text{ u-day}} \right) = 8.6 \text{ u-sec}.$

52. Abbreviating wapentake as “wp” and assuming a hide to be 110 acres, we set up the ratio 25 wp/11 barn along with appropriate conversion factors:

$$\frac{(25 \text{ wp}) \left( \frac{100 \text{ hide}}{1 \text{ wp}} \right) \left( \frac{110 \text{ acre}}{1 \text{ hide}} \right) \left( \frac{4047 \text{ m}^2}{1 \text{ acre}} \right)}{(11 \text{ barn}) \left( \frac{1 \times 10^{-28} \text{ m}^2}{1 \text{ barn}} \right)} \approx 1 \times 10^{36}.$$

53. (a) Squaring the relation  $1 \text{ ken} = 1.97 \text{ m}$ , and setting up the ratio, we obtain

$$\frac{1 \text{ ken}^2}{1 \text{ m}^2} = \frac{1.97^2 \text{ m}^2}{1 \text{ m}^2} = 3.88.$$

(b) Similarly, we find

$$\frac{1 \text{ ken}^3}{1 \text{ m}^3} = \frac{1.97^3 \text{ m}^3}{1 \text{ m}^3} = 7.65.$$

(c) The volume of a cylinder is the circular area of its base multiplied by its height. Thus,

$$\pi r^2 h = \pi (3.00)^2 (5.50) = 156 \text{ ken}^3.$$

(d) If we multiply this by the result of part (b), we determine the volume in cubic meters:  
 $(155.5)(7.65) = 1.19 \times 10^3 \text{ m}^3.$

54. The mass in kilograms is

$$(28.9 \text{ piculs}) \left( \frac{100 \text{ gin}}{1 \text{ picul}} \right) \left( \frac{16 \text{ tahlil}}{1 \text{ gin}} \right) \left( \frac{10 \text{ chee}}{1 \text{ tahlil}} \right) \left( \frac{10 \text{ hoon}}{1 \text{ chee}} \right) \left( \frac{0.3779 \text{ g}}{1 \text{ hoon}} \right)$$

which yields  $1.747 \times 10^6 \text{ g}$  or roughly  $1.75 \times 10^3 \text{ kg}$ .

55. In the simplest approach, we set up a ratio for the total increase in *horizontal depth*  $x$  (where  $\Delta x = 0.05$  m is the increase in horizontal depth per step)

$$x = N_{\text{steps}} \Delta x = \left( \frac{4.57}{0.19} \right) (0.05 \text{ m}) = 1.2 \text{ m}.$$

However, we can approach this more carefully by noting that if there are  $N = 4.57/.19 \approx 24$  rises then under normal circumstances we would expect  $N - 1 = 23$  runs (horizontal pieces) in that staircase. This would yield  $(23)(0.05 \text{ m}) = 1.15 \text{ m}$ , which - to two significant figures - agrees with our first result.

56. Since one atomic mass unit is  $1 \text{ u} = 1.66 \times 10^{-24} \text{ g}$  (see Appendix D), the mass of one mole of atoms is about  $m = (1.66 \times 10^{-24} \text{ g})(6.02 \times 10^{23}) = 1 \text{ g}$ . On the other hand, the mass of one mole of atoms in the common Eastern mole is

$$m' = \frac{75 \text{ g}}{7.5} = 10 \text{ g}$$

Therefore, in atomic mass units, the average mass of one atom in the common Eastern mole is

$$\frac{m'}{N_A} = \frac{10 \text{ g}}{6.02 \times 10^{23}} = 1.66 \times 10^{-23} \text{ g} = 10 \text{ u}.$$



57. (a) When  $\theta$  is measured in radians, it is equal to the arc length  $s$  divided by the radius  $R$ . For a very large radius circle and small value of  $\theta$ , such as we deal with in Fig. 1-9, the arc may be approximated as the straight line-segment of length 1 AU. First, we convert  $\theta = 1$  arcsecond to radians:

$$(1 \text{ arcsecond}) \left( \frac{1 \text{ arcminute}}{60 \text{ arcsecond}} \right) \left( \frac{1^\circ}{60 \text{ arcminute}} \right) \left( \frac{2\pi \text{ radian}}{360^\circ} \right)$$

which yields  $\theta = 4.85 \times 10^{-6}$  rad. Therefore, one parsec is

$$R_0 = \frac{s}{\theta} = \frac{1 \text{ AU}}{4.85 \times 10^{-6}} = 2.06 \times 10^5 \text{ AU}.$$

Now we use this to convert  $R = 1$  AU to parsecs:

$$R = (1 \text{ AU}) \left( \frac{1 \text{ pc}}{2.06 \times 10^5 \text{ AU}} \right) = 4.9 \times 10^{-6} \text{ pc}.$$

(b) Also, since it is straightforward to figure the number of seconds in a year (about  $3.16 \times 10^7$  s), and (for constant speeds) distance = speed  $\times$  time, we have

$$1 \text{ ly} = (186,000 \text{ mi/s}) (3.16 \times 10^7 \text{ s}) = 5.9 \times 10^{12} \text{ mi}$$

which we convert to AU by dividing by  $92.6 \times 10^6$  (given in the problem statement), obtaining  $6.3 \times 10^4$  AU. Inverting, the result is  $1 \text{ AU} = 1/6.3 \times 10^4 = 1.6 \times 10^{-5} \text{ ly}$ .

58. The volume of the filled container is  $24000 \text{ cm}^3 = 24 \text{ liters}$ , which (using the conversion given in the problem) is equivalent to 50.7 pints (U.S). The expected number is therefore in the range from 1317 to 1927 Atlantic oysters. Instead, the number received is in the range from 406 to 609 Pacific oysters. This represents a shortage in the range of roughly 700 to 1500 oysters (the answer to the problem). Note that the minimum value in our answer corresponds to the minimum Atlantic minus the maximum Pacific, and the maximum value corresponds to the maximum Atlantic minus the minimum Pacific.

59. (a) For the minimum (43 cm) case, 9 cubit converts as follows:

$$9 \text{ cubit} = (9 \text{ cubit}) \left( \frac{0.43 \text{ m}}{1 \text{ cubit}} \right) = 3.9 \text{ m}.$$

And for the maximum (53 cm) case we obtain

$$9 \text{ cubit} = (9 \text{ cubit}) \left( \frac{0.53 \text{ m}}{1 \text{ cubit}} \right) = 4.8 \text{ m}.$$

(b) Similarly, with  $0.43 \text{ m} \rightarrow 430 \text{ mm}$  and  $0.53 \text{ m} \rightarrow 530 \text{ mm}$ , we find  $3.9 \times 10^3 \text{ mm}$  and  $4.8 \times 10^3 \text{ mm}$ , respectively.

(c) We can convert length and diameter first and then compute the volume, or first compute the volume and then convert. We proceed using the latter approach (where  $d$  is diameter and  $\ell$  is length).

$$V_{\text{cylinder, min}} = \frac{\pi}{4} \ell d^2 = 28 \text{ cubit}^3 = (28 \text{ cubit}^3) \left( \frac{0.43 \text{ m}}{1 \text{ cubit}} \right)^3 = 2.2 \text{ m}^3.$$

Similarly, with  $0.43 \text{ m}$  replaced by  $0.53 \text{ m}$ , we obtain  $V_{\text{cylinder, max}} = 4.2 \text{ m}^3$ .

60. (a) We reduce the stock amount to British teaspoons:

$$1 \text{ breakfastcup} = 2 \times 8 \times 2 \times 2 = 64 \text{ teaspoons}$$

$$1 \text{ teacup} = 8 \times 2 \times 2 = 32 \text{ teaspoons}$$

$$6 \text{ tablespoons} = 6 \times 2 \times 2 = 24 \text{ teaspoons}$$

$$1 \text{ dessertspoon} = 2 \text{ teaspoons}$$

which totals to 122 British teaspoons, or 122 U.S. teaspoons since liquid measure is being used. Now with one U.S cup equal to 48 teaspoons, upon dividing  $122/48 \approx 2.54$ , we find this amount corresponds to 2.5 U.S. cups plus a remainder of precisely 2 teaspoons. In other words,

$$122 \text{ U.S. teaspoons} = 2.5 \text{ U.S. cups} + 2 \text{ U.S. teaspoons.}$$

(b) For the nettle tops, one-half quart is still one-half quart.

(c) For the rice, one British tablespoon is 4 British teaspoons which (since dry-goods measure is being used) corresponds to 2 U.S. teaspoons.

(d) A British saltspoon is  $\frac{1}{2}$  British teaspoon which corresponds (since dry-goods measure is again being used) to 1 U.S. teaspoon.

1. We use Eq. 2-2 and Eq. 2-3. During a time  $t_c$  when the velocity remains a positive constant, speed is equivalent to velocity, and distance is equivalent to displacement, with  $\Delta x = v t_c$ .

(a) During the first part of the motion, the displacement is  $\Delta x_1 = 40$  km and the time interval is

$$t_1 = \frac{(40 \text{ km})}{(30 \text{ km/h})} = 1.33 \text{ h.}$$

During the second part the displacement is  $\Delta x_2 = 40$  km and the time interval is

$$t_2 = \frac{(40 \text{ km})}{(60 \text{ km/h})} = 0.67 \text{ h.}$$

Both displacements are in the same direction, so the total displacement is


$$\Delta x = \Delta x_1 + \Delta x_2 = 40 \text{ km} + 40 \text{ km} = 80 \text{ km.}$$

The total time for the trip is  $t = t_1 + t_2 = 2.00$  h. Consequently, the average velocity is

$$v_{\text{avg}} = \frac{(80 \text{ km})}{(2.0 \text{ h})} = 40 \text{ km/h.}$$

(b) In this example, the numerical result for the average speed is the same as the average velocity 40 km/h.

(c) As shown below, the graph consists of two contiguous line segments, the first having a slope of 30 km/h and connecting the origin to  $(t_1, x_1) = (1.33 \text{ h}, 40 \text{ km})$  and the second having a slope of 60 km/h and connecting  $(t_1, x_1)$  to  $(t, x) = (2.00 \text{ h}, 80 \text{ km})$ . From the graphical point of view, the slope of the dashed line drawn from the origin to  $(t, x)$  represents the average velocity.

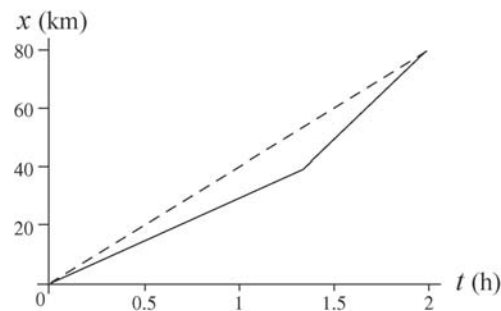

2. Average speed, as opposed to average velocity, relates to the total distance, as opposed to the net displacement. The distance  $D$  up the hill is, of course, the same as the distance down the hill, and since the speed is constant (during each stage of the motion) we have  $\text{speed} = D/t$ . Thus, the average speed is

$$\frac{D_{\text{up}} + D_{\text{down}}}{t_{\text{up}} + t_{\text{down}}} = \frac{2D}{\frac{D}{v_{\text{up}}} + \frac{D}{v_{\text{down}}}}$$

which, after canceling  $D$  and plugging in  $v_{\text{up}} = 40 \text{ km/h}$  and  $v_{\text{down}} = 60 \text{ km/h}$ , yields  $48 \text{ km/h}$  for the average speed.

3. The speed (assumed constant) is  $v = (90 \text{ km/h})(1000 \text{ m/km}) / (3600 \text{ s/h}) = 25 \text{ m/s}$ . Thus, in 0.50 s, the car travels  $(0.50 \text{ s})(25 \text{ m/s}) \approx 13 \text{ m}$ .

4. Huber's speed is

$$v_0 = (200 \text{ m}) / (6.509 \text{ s}) = 30.72 \text{ m/s} = 110.6 \text{ km/h},$$

where we have used the conversion factor  $1 \text{ m/s} = 3.6 \text{ km/h}$ . Since Whittingham beat Huber by  $19.0 \text{ km/h}$ , his speed is  $v_1 = (110.6 \text{ km/h} + 19.0 \text{ km/h}) = 129.6 \text{ km/h}$ , or  $36 \text{ m/s}$  ( $1 \text{ km/h} = 0.2778 \text{ m/s}$ ). Thus, the time through a distance of  $200 \text{ m}$  for Whittingham is

$$\Delta t = \frac{\Delta x}{v_1} = \frac{200 \text{ m}}{36 \text{ m/s}} = 5.554 \text{ s}.$$



5. Using  $x = 3t - 4t^2 + t^3$  with SI units understood is efficient (and is the approach we will use), but if we wished to make the units explicit we would write

$$x = (3 \text{ m/s})t - (4 \text{ m/s}^2)t^2 + (1 \text{ m/s}^3)t^3.$$

We will quote our answers to one or two significant figures, and not try to follow the significant figure rules rigorously.

(a) Plugging in  $t = 1 \text{ s}$  yields  $x = 3 - 4 + 1 = 0$ .

(b) With  $t = 2 \text{ s}$  we get  $x = 3(2) - 4(2)^2 + (2)^3 = -2 \text{ m}$ .

(c) With  $t = 3 \text{ s}$  we have  $x = 0 \text{ m}$ .

(d) Plugging in  $t = 4 \text{ s}$  gives  $x = 12 \text{ m}$ .

For later reference, we also note that the position at  $t = 0$  is  $x = 0$ .


(e) The position at  $t = 0$  is subtracted from the position at  $t = 4 \text{ s}$  to find the displacement  $\Delta x = 12 \text{ m}$ .

(f) The position at  $t = 2 \text{ s}$  is subtracted from the position at  $t = 4 \text{ s}$  to give the displacement  $\Delta x = 14 \text{ m}$ . Eq. 2-2, then, leads to

$$v_{\text{avg}} = \frac{\Delta x}{\Delta t} = \frac{14 \text{ m}}{2 \text{ s}} = 7 \text{ m/s}.$$

(g) The horizontal axis is  $0 \leq t \leq 4$  with SI units understood.

Not shown is a straight line drawn from the point at  $(t, x) = (2, -2)$  to the highest point shown (at  $t = 4 \text{ s}$ ) which would represent the answer for part (f).

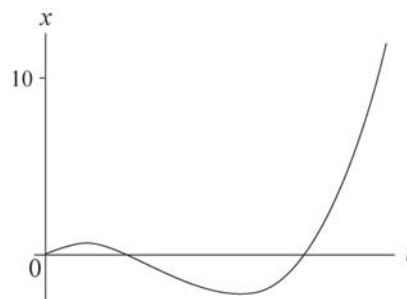


6. (a) Using the fact that time = distance/velocity while the velocity is constant, we find

$$v_{\text{avg}} = \frac{73.2 \text{ m} + 73.2 \text{ m}}{\frac{73.2 \text{ m}}{1.22 \text{ m/s}} + \frac{73.2 \text{ m}}{3.05 \text{ m/s}}} = 1.74 \text{ m/s}.$$

(b) Using the fact that distance =  $vt$  while the velocity  $v$  is constant, we find

$$v_{\text{avg}} = \frac{(1.22 \text{ m/s})(60 \text{ s}) + (3.05 \text{ m/s})(60 \text{ s})}{120 \text{ s}} = 2.14 \text{ m/s}.$$

(c) The graphs are shown below (with meters and seconds understood). The first consists of two (solid) line segments, the first having a slope of 1.22 and the second having a slope of 3.05. The slope of the dashed line represents the average velocity (in both graphs). The second graph also consists of two (solid) line segments, having the same slopes as before — the main difference (compared to the first graph) being that the stage involving higher-speed motion lasts much longer.

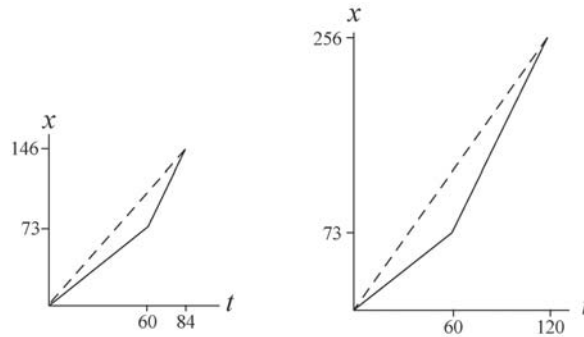

7. Converting to seconds, the running times are  $t_1 = 147.95$  s and  $t_2 = 148.15$  s, respectively. If the runners were equally fast, then

$$s_{\text{avg}1} = s_{\text{avg}2} \Rightarrow \frac{L_1}{t_1} = \frac{L_2}{t_2}.$$

From this we obtain

$$L_2 - L_1 = \left( \frac{t_2}{t_1} - 1 \right) L_1 = \left( \frac{148.15}{147.95} - 1 \right) L_1 = 0.00135 L_1 \approx 1.4 \text{ m}$$

where we set  $L_1 \approx 1000$  m in the last step. Thus, if  $L_1$  and  $L_2$  are no different than about 1.4 m, then runner 1 is indeed faster than runner 2. However, if  $L_1$  is shorter than  $L_2$  by more than 1.4 m, then runner 2 would actually be faster.

8. Let  $v_w$  be the speed of the wind and  $v_c$  be the speed of the car.

(a) Suppose during time interval  $t_1$ , the car moves in the same direction as the wind. Then its effective speed is  $v_{eff,1} = v_c + v_w$ , and the distance traveled is  $d = v_{eff,1}t_1 = (v_c + v_w)t_1$ . On the other hand, for the return trip during time interval  $t_2$ , the car moves in the opposite direction of the wind and the effective speed would be  $v_{eff,2} = v_c - v_w$ . The distance traveled is  $d = v_{eff,2}t_2 = (v_c - v_w)t_2$ . The two expressions can be rewritten as

$$v_c + v_w = \frac{d}{t_1} \quad \text{and} \quad v_c - v_w = \frac{d}{t_2}$$

Adding the two equations and dividing by two, we obtain  $v_c = \frac{1}{2} \left( \frac{d}{t_1} + \frac{d}{t_2} \right)$ . Thus, method 1 gives the car's speed  $v_c$  in windless situation.

(b) If method 2 is used, the result would be

$$v'_c = \frac{d}{(t_1 + t_2)/2} = \frac{2d}{t_1 + t_2} = \frac{2d}{\frac{d}{v_c + v_w} + \frac{d}{v_c - v_w}} = \frac{v_c^2 - v_w^2}{v_c} = v_c \left[ 1 - \left( \frac{v_w}{v_c} \right)^2 \right].$$

The fractional difference would be

$$\frac{v_c - v'_c}{v_c} = \left( \frac{v_w}{v_c} \right)^2 = (0.0240)^2 = 5.76 \times 10^{-4}.$$

9. The values used in the problem statement make it easy to see that the first part of the trip (at 100 km/h) takes 1 hour, and the second part (at 40 km/h) also takes 1 hour. Expressed in decimal form, the time left is 1.25 hour, and the distance that remains is 160 km. Thus, a speed  $v = (160 \text{ km})/(1.25 \text{ h}) = 128 \text{ km/h}$  is needed.

10. The amount of time it takes for each person to move a distance  $L$  with speed  $v_s$  is  $\Delta t = L / v_s$ . With each additional person, the depth increases by one body depth  $d$

(a) The rate of increase of the layer of people is

$$R = \frac{d}{\Delta t} = \frac{d}{L / v_s} = \frac{dv_s}{L} = \frac{(0.25 \text{ m})(3.50 \text{ m/s})}{1.75 \text{ m}} = 0.50 \text{ m/s}$$

(b) The amount of time required to reach a depth of  $D = 5.0 \text{ m}$  is

$$t = \frac{D}{R} = \frac{5.0 \text{ m}}{0.50 \text{ m/s}} = 10 \text{ s}$$

11. Recognizing that the gap between the trains is closing at a constant rate of 60 km/h, the total time which elapses before they crash is  $t = (60 \text{ km})/(60 \text{ km/h}) = 1.0 \text{ h}$ . During this time, the bird travels a distance of  $x = vt = (60 \text{ km/h})(1.0 \text{ h}) = 60 \text{ km}$ .

12. (a) Let the fast and the slow cars be separated by a distance  $d$  at  $t = 0$ . If during the time interval  $t = L/v_s = (12.0 \text{ m})/(5.0 \text{ m/s}) = 2.40 \text{ s}$  in which the slow car has moved a distance of  $L = 12.0 \text{ m}$ , the fast car moves a distance of  $vt = d + L$  to join the line of slow cars, then the shock wave would remain stationary. The condition implies a separation of

$$d = vt - L = (25 \text{ m/s})(2.4 \text{ s}) - 12.0 \text{ m} = 48.0 \text{ m}.$$

(b) Let the initial separation at  $t = 0$  be  $d = 96.0 \text{ m}$ . At a later time  $t$ , the slow and the fast cars have traveled  $x = v_s t$  and the fast car joins the line by moving a distance  $d + x$ . From

$$t = \frac{x}{v_s} = \frac{d + x}{v},$$

we get

$$x = \frac{v_s}{v - v_s} d = \frac{5.00 \text{ m/s}}{25.0 \text{ m/s} - 5.00 \text{ m/s}} (96.0 \text{ m}) = 24.0 \text{ m},$$

which in turn gives  $t = (24.0 \text{ m})/(5.00 \text{ m/s}) = 4.80 \text{ s}$ . Since the rear of the slow-car pack has moved a distance of  $\Delta x = x - L = 24.0 \text{ m} - 12.0 \text{ m} = 12.0 \text{ m}$  downstream, the speed of the rear of the slow-car pack, or equivalently, the speed of the shock wave, is

$$v_{\text{shock}} = \frac{\Delta x}{t} = \frac{12.0 \text{ m}}{4.80 \text{ s}} = 2.50 \text{ m/s}.$$

(c) Since  $x > L$ , the direction of the shock wave is downstream.



13. (a) Denoting the travel time and distance from San Antonio to Houston as  $T$  and  $D$ , respectively, the average speed is

$$s_{\text{avg1}} = \frac{D}{T} = \frac{(55 \text{ km/h})(T/2) + (90 \text{ km/h})(T/2)}{T} = 72.5 \text{ km/h}$$

which should be rounded to 73 km/h.

(b) Using the fact that time = distance/speed while the speed is constant, we find

$$s_{\text{avg2}} = \frac{D}{T} = \frac{D}{\frac{D/2}{55 \text{ km/h}} + \frac{D/2}{90 \text{ km/h}}} = 68.3 \text{ km/h}$$


which should be rounded to 68 km/h.

(c) The total distance traveled ( $2D$ ) must not be confused with the net displacement (zero). We obtain for the two-way trip

$$s_{\text{avg}} = \frac{2D}{\frac{D}{72.5 \text{ km/h}} + \frac{D}{68.3 \text{ km/h}}} = 70 \text{ km/h}.$$

(d) Since the net displacement vanishes, the average velocity for the trip in its entirety is zero.

(e) In asking for a *sketch*, the problem is allowing the student to arbitrarily set the distance  $D$  (the intent is *not* to make the student go to an Atlas to look it up); the student can just as easily arbitrarily set  $T$  instead of  $D$ , as will be clear in the following discussion. We briefly describe the graph (with kilometers-per-hour understood for the slopes): two contiguous line segments, the first having a slope of 55 and connecting the origin to  $(t_1, x_1) = (T/2, 55T/2)$  and the second having a slope of 90 and connecting  $(t_1, x_1)$  to  $(T, D)$  where  $D = (55 + 90)T/2$ . The average velocity, from the graphical point of view, is the slope of a line drawn from the origin to  $(T, D)$ . The graph (not drawn to scale) is depicted below:

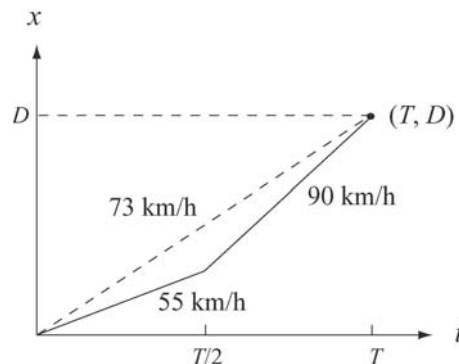

14. We use the functional notation  $x(t)$ ,  $v(t)$  and  $a(t)$  in this solution, where the latter two quantities are obtained by differentiation:

$$v(t) = \frac{dx(t)}{dt} = -12t \quad \text{and} \quad a(t) = \frac{dv(t)}{dt} = -12$$


with SI units understood.

(a) From  $v(t) = 0$  we find it is (momentarily) at rest at  $t = 0$ .

(b) We obtain  $x(0) = 4.0$  m

(c) and (d) Requiring  $x(t) = 0$  in the expression  $x(t) = 4.0 - 6.0t^2$  leads to  $t = \pm 0.82$  s for the times when the particle can be found passing through the origin.

(e) We show both the asked-for graph (on the left) as well as the “shifted” graph which is relevant to part (f). In both cases, the time axis is given by  $-3 \leq t \leq 3$  (SI units understood).

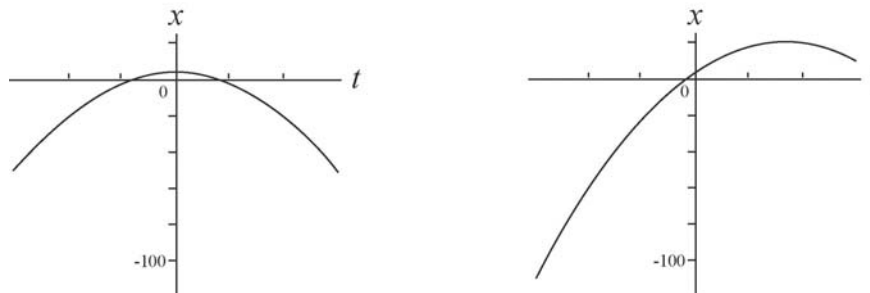

(f) We arrived at the graph on the right (shown above) by adding  $20t$  to the  $x(t)$  expression.

(g) Examining where the slopes of the graphs become zero, it is clear that the shift causes the  $v = 0$  point to correspond to a larger value of  $x$  (the top of the second curve shown in part (e) is higher than that of the first).

15. We use Eq. 2-4. to solve the problem.

(a) The velocity of the particle is

$$v = \frac{dx}{dt} = \frac{d}{dt} (4 - 12t + 3t^2) = -12 + 6t.$$

Thus, at  $t = 1$  s, the velocity is  $v = (-12 + (6)(1)) = -6$  m/s.

(b) Since  $v < 0$ , it is moving in the negative  $x$  direction at  $t = 1$  s.

(c) At  $t = 1$  s, the *speed* is  $|v| = 6$  m/s.

(d) For  $0 < t < 2$  s,  $|v|$  decreases until it vanishes. For  $2 < t < 3$  s,  $|v|$  increases from zero to the value it had in part (c). Then,  $|v|$  is larger than that value for  $t > 3$  s.

(e) Yes, since  $v$  smoothly changes from negative values (consider the  $t = 1$  result) to positive (note that as  $t \rightarrow +\infty$ , we have  $v \rightarrow +\infty$ ). One can check that  $v = 0$  when  $t = 2$  s.

(f) No. In fact, from  $v = -12 + 6t$ , we know that  $v > 0$  for  $t > 2$  s.

16. Using the general property  $\frac{d}{dx} \exp(bx) = b \exp(bx)$ , we write

$$v = \frac{dx}{dt} = \left( \frac{d(19t)}{dt} \right) \cdot e^{-t} + (19t) \cdot \left( \frac{de^{-t}}{dt} \right) .$$

If a concern develops about the appearance of an argument of the exponential ( $-t$ ) apparently having units, then an explicit factor of  $1/T$  where  $T = 1$  second can be inserted and carried through the computation (which does not change our answer). The result of this differentiation is

$$v = 16(1 - t)e^{-t}$$

with  $t$  and  $v$  in SI units (s and m/s, respectively). We see that this function is zero when  $t = 1$  s. Now that we know *when* it stops, we find out *where* it stops by plugging our result  $t = 1$  into the given function  $x = 16te^{-t}$  with  $x$  in meters. Therefore, we find  $x = 5.9$  m.

17. We use Eq. 2-2 for average velocity and Eq. 2-4 for instantaneous velocity, and work with distances in centimeters and times in seconds.

(a) We plug into the given equation for  $x$  for  $t = 2.00$  s and  $t = 3.00$  s and obtain  $x_2 = 21.75$  cm and  $x_3 = 50.25$  cm, respectively. The average velocity during the time interval  $2.00 \leq t \leq 3.00$  s is

$$v_{\text{avg}} = \frac{\Delta x}{\Delta t} = \frac{50.25 \text{ cm} - 21.75 \text{ cm}}{3.00 \text{ s} - 2.00 \text{ s}}$$

which yields  $v_{\text{avg}} = 28.5$  cm/s.

(b) The instantaneous velocity is  $v = \frac{dx}{dt} = 4.5t^2$ , which, at time  $t = 2.00$  s, yields  $v = (4.5)(2.00)^2 = 18.0$  cm/s.

(c) At  $t = 3.00$  s, the instantaneous velocity is  $v = (4.5)(3.00)^2 = 40.5$  cm/s.


(d) At  $t = 2.50$  s, the instantaneous velocity is  $v = (4.5)(2.50)^2 = 28.1$  cm/s.

(e) Let  $t_m$  stand for the moment when the particle is midway between  $x_2$  and  $x_3$  (that is, when the particle is at  $x_m = (x_2 + x_3)/2 = 36$  cm). Therefore,

$$x_m = 9.75 + 1.5t_m^3 \Rightarrow t_m = 2.596$$

in seconds. Thus, the instantaneous speed at this time is  $v = 4.5(2.596)^2 = 30.3$  cm/s.

(f) The answer to part (a) is given by the slope of the straight line between  $t = 2$  and  $t = 3$  in this  $x$ -vs- $t$  plot. The answers to parts (b), (c), (d) and (e) correspond to the slopes of tangent lines (not shown but easily imagined) to the curve at the appropriate points.

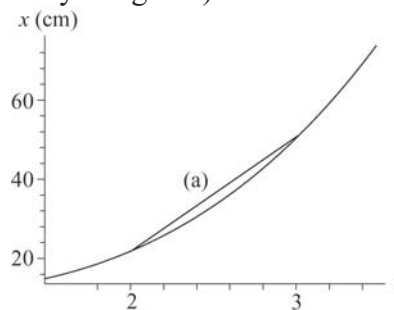

18. We use the functional notation  $x(t)$ ,  $v(t)$  and  $a(t)$  and find the latter two quantities by differentiating:

$$v(t) = \frac{dx(t)}{dt} = -15t^2 + 20 \quad \text{and} \quad a(t) = \frac{dv(t)}{dt} = -30t$$

with SI units understood. These expressions are used in the parts that follow.


(a) From  $0 = -15t^2 + 20$ , we see that the only positive value of  $t$  for which the particle is (momentarily) stopped is  $t = \sqrt{20/15} = 1.2$  s.

(b) From  $0 = -30t$ , we find  $a(0) = 0$  (that is, it vanishes at  $t = 0$ ).

(c) It is clear that  $a(t) = -30t$  is negative for  $t > 0$

(d) The acceleration  $a(t) = -30t$  is positive for  $t < 0$ .

(e) The graphs are shown below. SI units are understood.

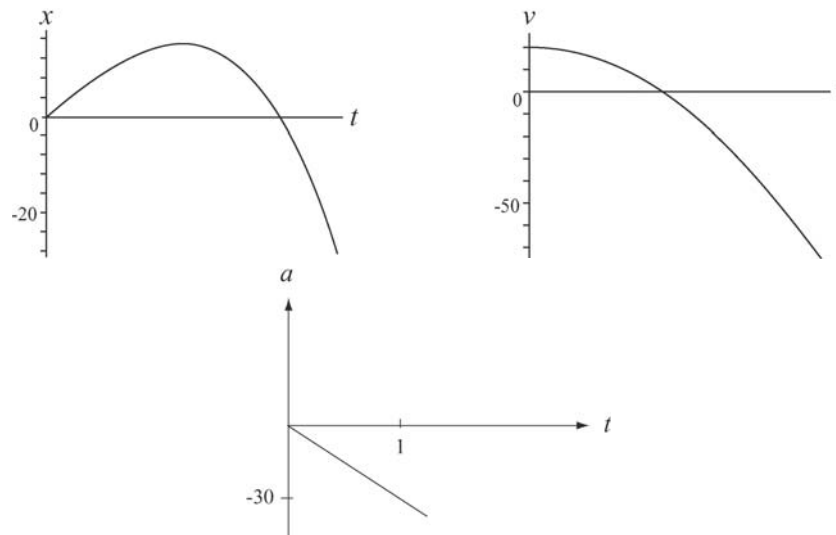

19. We represent its initial direction of motion as the  $+x$  direction, so that  $v_0 = +18 \text{ m/s}$  and  $v = -30 \text{ m/s}$  (when  $t = 2.4 \text{ s}$ ). Using Eq. 2-7 (or Eq. 2-11, suitably interpreted) we find

$$a_{\text{avg}} = \frac{(-30 \text{ m/s}) - (+18 \text{ m/s})}{2.4 \text{ s}} = -25 \text{ m/s}^2$$

which indicates that the average acceleration has magnitude  $25 \text{ m/s}^2$  and is in the opposite direction to the particle's initial velocity.

20. (a) Taking derivatives of  $x(t) = 12t^2 - 2t^3$  we obtain the velocity and the acceleration functions:

$$v(t) = 24t - 6t^2 \quad \text{and} \quad a(t) = 24 - 12t$$

with length in meters and time in seconds. Plugging in the value  $t = 3$  yields  $x(3) = 54$  m.

(b) Similarly, plugging in the value  $t = 3$  yields  $v(3) = 18$  m/s.

(c) For  $t = 3$ ,  $a(3) = -12$  m/s<sup>2</sup>.

(d) At the maximum  $x$ , we must have  $v = 0$ ; eliminating the  $t = 0$  root, the velocity equation reveals  $t = 24/6 = 4$  s for the time of maximum  $x$ . Plugging  $t = 4$  into the equation for  $x$  leads to  $x = 64$  m for the largest  $x$  value reached by the particle.

(e) From (d), we see that the  $x$  reaches its maximum at  $t = 4.0$  s.

(f) A maximum  $v$  requires  $a = 0$ , which occurs when  $t = 24/12 = 2.0$  s. This, inserted into the velocity equation, gives  $v_{\max} = 24$  m/s.

(g) From (f), we see that the maximum of  $v$  occurs at  $t = 24/12 = 2.0$  s.

(h) In part (e), the particle was (momentarily) motionless at  $t = 4$  s. The acceleration at that time is readily found to be  $24 - 12(4) = -24$  m/s<sup>2</sup>.

(i) The *average velocity* is defined by Eq. 2-2, so we see that the values of  $x$  at  $t = 0$  and  $t = 3$  s are needed; these are, respectively,  $x = 0$  and  $x = 54$  m (found in part (a)). Thus,

$$v_{\text{avg}} = \frac{54 - 0}{3 - 0} = 18 \text{ m/s} \quad .$$



21. In this solution, we make use of the notation  $x(t)$  for the value of  $x$  at a particular  $t$ . The notations  $v(t)$  and  $a(t)$  have similar meanings.

(a) Since the unit of  $ct^2$  is that of length, the unit of  $c$  must be that of length/time<sup>2</sup>, or m/s<sup>2</sup> in the SI system.

(b) Since  $bt^3$  has a unit of length,  $b$  must have a unit of length/time<sup>3</sup>, or m/s<sup>3</sup>.

(c) When the particle reaches its maximum (or its minimum) coordinate its velocity is zero. Since the velocity is given by  $v = dx/dt = 2ct - 3bt^2$ ,  $v = 0$  occurs for  $t = 0$  and for

$$t = \frac{2c}{3b} = \frac{2(3.0 \text{ m/s}^2)}{3(2.0 \text{ m/s}^3)} = 1.0 \text{ s}.$$

For  $t = 0$ ,  $x = x_0 = 0$  and for  $t = 1.0 \text{ s}$ ,  $x = 1.0 \text{ m} > x_0$ . Since we seek the maximum, we reject the first root ( $t = 0$ ) and accept the second ( $t = 1 \text{ s}$ ).

(d) In the first 4 s the particle moves from the origin to  $x = 1.0 \text{ m}$ , turns around, and goes back to

$$x(4 \text{ s}) = (3.0 \text{ m/s}^2)(4.0 \text{ s})^2 - (2.0 \text{ m/s}^3)(4.0 \text{ s})^3 = -80 \text{ m}.$$

The total path length it travels is  $1.0 \text{ m} + 1.0 \text{ m} + 80 \text{ m} = 82 \text{ m}$ .

(e) Its displacement is  $\Delta x = x_2 - x_1$ , where  $x_1 = 0$  and  $x_2 = -80 \text{ m}$ . Thus,  $\Delta x = -80 \text{ m}$ .

The velocity is given by  $v = 2ct - 3bt^2 = (6.0 \text{ m/s}^2)t - (6.0 \text{ m/s}^3)t^2$ .

(f) Plugging in  $t = 1 \text{ s}$ , we obtain

$$v(1 \text{ s}) = (6.0 \text{ m/s}^2)(1.0 \text{ s}) - (6.0 \text{ m/s}^3)(1.0 \text{ s})^2 = 0.$$

(g) Similarly,  $v(2 \text{ s}) = (6.0 \text{ m/s}^2)(2.0 \text{ s}) - (6.0 \text{ m/s}^3)(2.0 \text{ s})^2 = -12 \text{ m/s}$ .

(h)  $v(3 \text{ s}) = (6.0 \text{ m/s}^2)(3.0 \text{ s}) - (6.0 \text{ m/s}^3)(3.0 \text{ s})^2 = -36 \text{ m/s}$ .

(i)  $v(4 \text{ s}) = (6.0 \text{ m/s}^2)(4.0 \text{ s}) - (6.0 \text{ m/s}^3)(4.0 \text{ s})^2 = -72 \text{ m/s}$ .

The acceleration is given by  $a = dv/dt = 2c - 6b = 6.0 \text{ m/s}^2 - (12.0 \text{ m/s}^3)t$ .

(j) Plugging in  $t = 1 \text{ s}$ , we obtain

$$a(1 \text{ s}) = 6.0 \text{ m/s}^2 - (12.0 \text{ m/s}^3)(1.0 \text{ s}) = -6.0 \text{ m/s}^2.$$

(k)  $a(2 \text{ s}) = 6.0 \text{ m/s}^2 - (12.0 \text{ m/s}^3)(2.0 \text{ s}) = -18 \text{ m/s}^2$ .

(l)  $a(3 \text{ s}) = 6.0 \text{ m/s}^2 - (12.0 \text{ m/s}^3)(3.0 \text{ s}) = -30 \text{ m/s}^2$ .

(m)  $a(4 \text{ s}) = 6.0 \text{ m/s}^2 - (12.0 \text{ m/s}^3)(4.0 \text{ s}) = -42 \text{ m/s}^2$ .

22. We use Eq. 2-2 (average velocity) and Eq. 2-7 (average acceleration). Regarding our coordinate choices, the initial position of the man is taken as the origin and his direction of motion during  $5 \text{ min} \leq t \leq 10 \text{ min}$  is taken to be the positive  $x$  direction. We also use the fact that  $\Delta x = v\Delta t'$  when the velocity is constant during a time interval  $\Delta t'$ .

(a) The entire interval considered is  $\Delta t = 8 - 2 = 6 \text{ min}$  which is equivalent to 360 s, whereas the sub-interval in which he is *moving* is only  $\Delta t' = 8 - 5 = 3 \text{ min} = 180 \text{ s}$ . His position at  $t = 2 \text{ min}$  is  $x = 0$  and his position at  $t = 8 \text{ min}$  is  $x = v\Delta t' = (2.2)(180) = 396 \text{ m}$ . Therefore,

$$v_{\text{avg}} = \frac{396 \text{ m} - 0}{360 \text{ s}} = 1.10 \text{ m/s}.$$

(b) The man is at rest at  $t = 2 \text{ min}$  and has velocity  $v = +2.2 \text{ m/s}$  at  $t = 8 \text{ min}$ . Thus, keeping the answer to 3 significant figures,


$$a_{\text{avg}} = \frac{2.2 \text{ m/s} - 0}{360 \text{ s}} = 0.00611 \text{ m/s}^2.$$

(c) Now, the entire interval considered is  $\Delta t = 9 - 3 = 6 \text{ min}$  (360 s again), whereas the sub-interval in which he is moving is  $\Delta t' = 9 - 5 = 4 \text{ min} = 240 \text{ s}$ . His position at  $t = 3 \text{ min}$  is  $x = 0$  and his position at  $t = 9 \text{ min}$  is  $x = v\Delta t' = (2.2)(240) = 528 \text{ m}$ . Therefore,

$$v_{\text{avg}} = \frac{528 \text{ m} - 0}{360 \text{ s}} = 1.47 \text{ m/s}.$$

(d) The man is at rest at  $t = 3 \text{ min}$  and has velocity  $v = +2.2 \text{ m/s}$  at  $t = 9 \text{ min}$ . Consequently,  $a_{\text{avg}} = 2.2/360 = 0.00611 \text{ m/s}^2$  just as in part (b).

(e) The horizontal line near the bottom of this  $x$ -vs- $t$  graph represents the man standing at  $x = 0$  for  $0 \leq t < 300 \text{ s}$  and the linearly rising line for  $300 \leq t \leq 600 \text{ s}$  represents his constant-velocity motion. The dotted lines represent the answers to part (a) and (c) in the sense that their slopes yield those results.

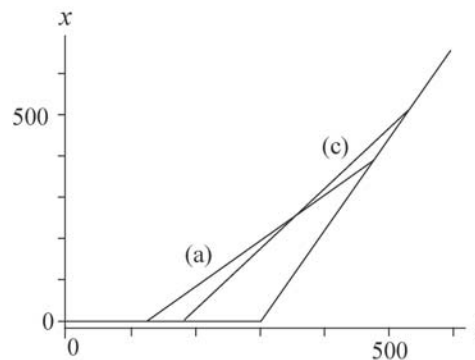

The graph of  $v$ -vs- $t$  is not shown here, but would consist of two horizontal “steps” (one at  $v = 0$  for  $0 \leq t < 300 \text{ s}$  and the next at  $v = 2.2 \text{ m/s}$  for  $300 \leq t \leq 600 \text{ s}$ ). The indications of the average accelerations found in parts (b) and (d) would be dotted lines connecting the “steps” at the appropriate  $t$  values (the slopes of the dotted lines representing the values of  $a_{\text{avg}}$ ).

23. We use  $v = v_0 + at$ , with  $t = 0$  as the instant when the velocity equals  $+9.6$  m/s.

(a) Since we wish to calculate the velocity for a time *before*  $t = 0$ , we set  $t = -2.5$  s. Thus, Eq. 2-11 gives

$$v = (9.6 \text{ m/s}) + (3.2 \text{ m/s}^2) (-2.5 \text{ s}) = 1.6 \text{ m/s}.$$

(b) Now,  $t = +2.5$  s and we find

$$v = (9.6 \text{ m/s}) + (3.2 \text{ m/s}^2) (2.5 \text{ s}) = 18 \text{ m/s}.$$


24. The constant-acceleration condition permits the use of Table 2-1.

(a) Setting  $v = 0$  and  $x_0 = 0$  in  $v^2 = v_0^2 + 2a(x - x_0)$ , we find

$$x = -\frac{1}{2} \frac{v_0^2}{a} = -\frac{1}{2} \frac{(5.00 \times 10^6)^2}{-1.25 \times 10^{14}} = 0.100 \text{ m}.$$

Since the muon is slowing, the initial velocity and the acceleration must have opposite signs.

(b) Below are the time-plots of the position  $x$  and velocity  $v$  of the muon from the moment it enters the field to the time it stops. The computation in part (a) made no reference to  $t$ , so that other equations from Table 2-1 (such as  $v = v_0 + at$  and  $x = v_0 t + \frac{1}{2} at^2$ ) are used in making these plots.

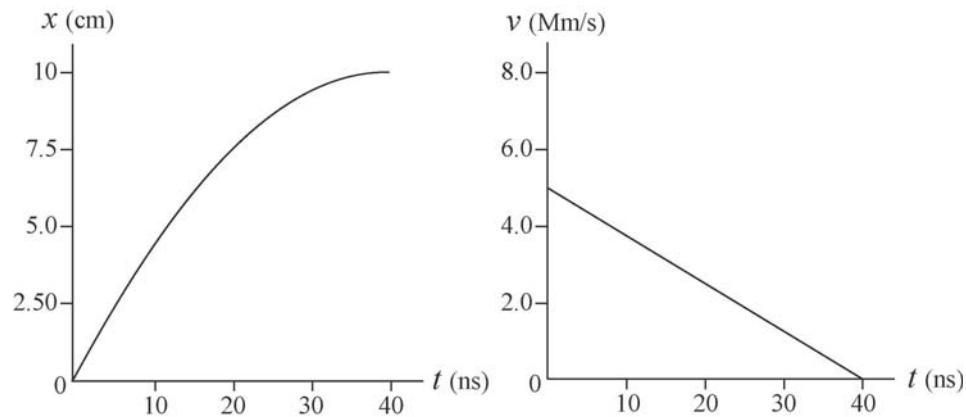

25. The constant acceleration stated in the problem permits the use of the equations in Table 2-1.

(a) We solve  $v = v_0 + at$  for the time:

$$t = \frac{v - v_0}{a} = \frac{\frac{1}{10}(3.0 \times 10^8 \text{ m/s})}{9.8 \text{ m/s}^2} = 3.1 \times 10^6 \text{ s}$$

which is equivalent to 1.2 months.

(b) We evaluate  $x = x_0 + v_0 t + \frac{1}{2} at^2$ , with  $x_0 = 0$ . The result is

$$x = \frac{1}{2} (9.8 \text{ m/s}^2) (3.1 \times 10^6 \text{ s})^2 = 4.6 \times 10^{13} \text{ m}.$$

26. We take  $+x$  in the direction of motion, so  $v_0 = +24.6 \text{ m/s}$  and  $a = -4.92 \text{ m/s}^2$ . We also take  $x_0 = 0$ .



(a) The time to come to a halt is found using Eq. 2-11:

$$0 = v_0 + at \Rightarrow t = \frac{24.6 \text{ m/s}}{-4.92 \text{ m/s}^2} = 5.00 \text{ s}.$$

(b) Although several of the equations in Table 2-1 will yield the result, we choose Eq. 2-16 (since it does not depend on our answer to part (a)).

$$0 = v_0^2 + 2ax \Rightarrow x = -\frac{(24.6 \text{ m/s})^2}{2(-4.92 \text{ m/s}^2)} = 61.5 \text{ m}.$$

(c) Using these results, we plot  $v_0 t + \frac{1}{2}at^2$  (the  $x$  graph, shown next, on the left) and  $v_0 + at$  (the  $v$  graph, on the right) over  $0 \leq t \leq 5 \text{ s}$ , with SI units understood.

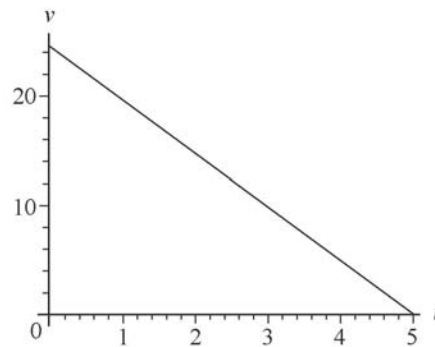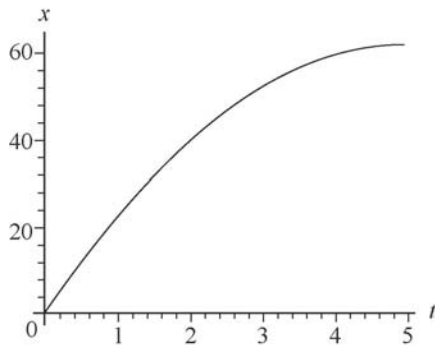

27. Assuming constant acceleration permits the use of the equations in Table 2-1. We solve  $v^2 = v_0^2 + 2a(x - x_0)$  with  $x_0 = 0$  and  $x = 0.010$  m. Thus,

$$a = \frac{v^2 - v_0^2}{2x} = \frac{(5.7 \times 10^5 \text{ m/s})^2 - (1.5 \times 10^5 \text{ m/s})^2}{2(0.010 \text{ m})} = 1.62 \times 10^{15} \text{ m/s}^2.$$

28. In this problem we are given the initial and final speeds, and the displacement, and asked to find the acceleration. We use the constant-acceleration equation given in Eq. 2-16,  $v^2 = v_0^2 + 2a(x - x_0)$ .

(a) With  $v_0 = 0$ ,  $v = 1.6 \text{ m/s}$  and  $\Delta x = 5.0 \mu\text{m}$ , the acceleration of the spores during the launch is

$$a = \frac{v^2 - v_0^2}{2x} = \frac{(1.6 \text{ m/s})^2}{2(5.0 \times 10^{-6} \text{ m})} = 2.56 \times 10^5 \text{ m/s}^2 = 2.6 \times 10^4 g$$

(b) During the speed-reduction stage, the acceleration is

$$a = \frac{v^2 - v_0^2}{2x} = \frac{0 - (1.6 \text{ m/s})^2}{2(1.0 \times 10^{-3} \text{ m})} = -1.28 \times 10^3 \text{ m/s}^2 = -1.3 \times 10^2 g$$

The negative sign means that the spores are decelerating.



29. We separate the motion into two parts, and take the direction of motion to be positive. In part 1, the vehicle accelerates from rest to its highest speed; we are given  $v_0 = 0$ ;  $v = 20$  m/s and  $a = 2.0$  m/s<sup>2</sup>. In part 2, the vehicle decelerates from its highest speed to a halt; we are given  $v_0 = 20$  m/s;  $v = 0$  and  $a = -1.0$  m/s<sup>2</sup> (negative because the acceleration vector points opposite to the direction of motion).

(a) From Table 2-1, we find  $t_1$  (the duration of part 1) from  $v = v_0 + at$ . In this way,  $20 = 0 + 2.0t_1$  yields  $t_1 = 10$  s. We obtain the duration  $t_2$  of part 2 from the same equation. Thus,  $0 = 20 + (-1.0)t_2$  leads to  $t_2 = 20$  s, and the total is  $t = t_1 + t_2 = 30$  s.

(b) For part 1, taking  $x_0 = 0$ , we use the equation  $v^2 = v_0^2 + 2a(x - x_0)$  from Table 2-1 and find

$$x = \frac{v^2 - v_0^2}{2a} = \frac{(20 \text{ m/s})^2 - (0)^2}{2(2.0 \text{ m/s}^2)} = 100 \text{ m}.$$

This position is then the *initial* position for part 2, so that when the same equation is used in part 2 we obtain

$$x - 100 \text{ m} = \frac{v^2 - v_0^2}{2a} = \frac{(0)^2 - (20 \text{ m/s})^2}{2(-1.0 \text{ m/s}^2)}.$$

Thus, the final position is  $x = 300$  m. That this is also the total distance traveled should be evident (the vehicle did not "backtrack" or reverse its direction of motion).

30. The acceleration is found from Eq. 2-11 (or, suitably interpreted, Eq. 2-7).

$$a = \frac{\Delta v}{\Delta t} = \frac{(1020 \text{ km/h}) \left( \frac{1000 \text{ m/km}}{3600 \text{ s/h}} \right)}{1.4 \text{ s}} = 202.4 \text{ m/s}^2 .$$

In terms of the gravitational acceleration  $g$ , this is expressed as a multiple of  $9.8 \text{ m/s}^2$  as follows:

$$a = \left( \frac{202.4 \text{ m/s}^2}{9.8 \text{ m/s}^2} \right) g = 21g .$$

31. We assume the periods of acceleration (duration  $t_1$ ) and deceleration (duration  $t_2$ ) are periods of constant  $a$  so that Table 2-1 can be used. Taking the direction of motion to be  $+x$  then  $a_1 = +1.22 \text{ m/s}^2$  and  $a_2 = -1.22 \text{ m/s}^2$ . We use SI units so the velocity at  $t = t_1$  is  $v = 305/60 = 5.08 \text{ m/s}$ .

(a) We denote  $\Delta x$  as the distance moved during  $t_1$ , and use Eq. 2-16:

$$v^2 = v_0^2 + 2a_1\Delta x \Rightarrow \Delta x = \frac{(5.08 \text{ m/s})^2}{2(1.22 \text{ m/s}^2)} = 10.59 \text{ m} \approx 10.6 \text{ m}.$$

(b) Using Eq. 2-11, we have

$$t_1 = \frac{v - v_0}{a_1} = \frac{5.08 \text{ m/s}}{1.22 \text{ m/s}^2} = 4.17 \text{ s}.$$

The deceleration time  $t_2$  turns out to be the same so that  $t_1 + t_2 = 8.33 \text{ s}$ . The distances traveled during  $t_1$  and  $t_2$  are the same so that they total to  $2(10.59 \text{ m}) = 21.18 \text{ m}$ . This implies that for a distance of  $190 \text{ m} - 21.18 \text{ m} = 168.82 \text{ m}$ , the elevator is traveling at constant velocity. This time of constant velocity motion is

$$t_3 = \frac{168.82 \text{ m}}{5.08 \text{ m/s}} = 33.21 \text{ s}.$$

Therefore, the total time is  $8.33 \text{ s} + 33.21 \text{ s} \approx 41.5 \text{ s}$ .

32. We choose the positive direction to be that of the initial velocity of the car (implying that  $a < 0$  since it is slowing down). We assume the acceleration is constant and use Table 2-1.


(a) Substituting  $v_0 = 137 \text{ km/h} = 38.1 \text{ m/s}$ ,  $v = 90 \text{ km/h} = 25 \text{ m/s}$ , and  $a = -5.2 \text{ m/s}^2$  into  $v = v_0 + at$ , we obtain

$$t = \frac{25 \text{ m/s} - 38 \text{ m/s}}{-5.2 \text{ m/s}^2} = 2.5 \text{ s}.$$

(b) We take the car to be at  $x = 0$  when the brakes are applied (at time  $t = 0$ ). Thus, the coordinate of the car as a function of time is given by

$$x = (38 \text{ m/s})t + \frac{1}{2}(-5.2 \text{ m/s}^2)t^2$$

in SI units. This function is plotted from  $t = 0$  to  $t = 2.5 \text{ s}$  on the graph below. We have not shown the  $v$ -vs- $t$  graph here; it is a descending straight line from  $v_0$  to  $v$ .

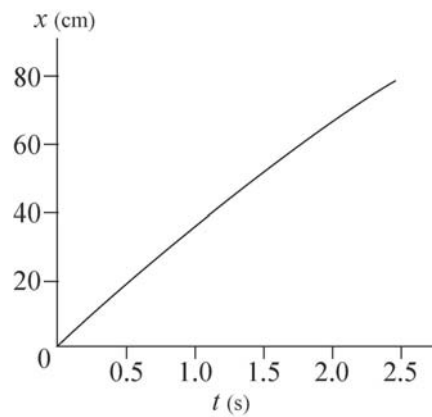

33. The problem statement (see part (a)) indicates that  $a = \text{constant}$ , which allows us to use Table 2-1.

(a) We take  $x_0 = 0$ , and solve  $x = v_0 t + \frac{1}{2} a t^2$  (Eq. 2-15) for the acceleration:  $a = 2(x - v_0 t)/t^2$ . Substituting  $x = 24.0 \text{ m}$ ,  $v_0 = 56.0 \text{ km/h} = 15.55 \text{ m/s}$  and  $t = 2.00 \text{ s}$ , we find

$$a = \frac{2(24.0 \text{ m} - (15.55 \text{ m/s})(2.00 \text{ s}))}{(2.00 \text{ s})^2} = -3.56 \text{ m/s}^2,$$

or  $|a| = 3.56 \text{ m/s}^2$ . The negative sign indicates that the acceleration is opposite to the direction of motion of the car. The car is slowing down.

(b) We evaluate  $v = v_0 + at$  as follows:

$$v = 15.55 \text{ m/s} - (3.56 \text{ m/s}^2)(2.00 \text{ s}) = 8.43 \text{ m/s}$$

which can also be converted to  $30.3 \text{ km/h}$ .

34. (a) Eq. 2-15 is used for part 1 of the trip and Eq. 2-18 is used for part 2:

$$\Delta x_1 = v_{01} t_1 + \frac{1}{2} a_1 t_1^2 \quad \text{where } a_1 = 2.25 \text{ m/s}^2 \text{ and } \Delta x_1 = \frac{900}{4} \text{ m}$$

$$\Delta x_2 = v_2 t_2 - \frac{1}{2} a_2 t_2^2 \quad \text{where } a_2 = -0.75 \text{ m/s}^2 \text{ and } \Delta x_2 = \frac{3(900)}{4} \text{ m}$$

In addition,  $v_{01} = v_2 = 0$ . Solving these equations for the times and adding the results gives  $t = t_1 + t_2 = 56.6 \text{ s}$ .

(b) Eq. 2-16 is used for part 1 of the trip:

$$v^2 = (v_{01})^2 + 2a_1\Delta x_1 = 0 + 2(2.25)\left(\frac{900}{4}\right) = 1013 \text{ m}^2/\text{s}^2$$

which leads to  $v = 31.8 \text{ m/s}$  for the maximum speed.

35. (a) From the figure, we see that  $x_0 = -2.0$  m. From Table 2-1, we can apply  $x - x_0 = v_0 t + \frac{1}{2} a t^2$  with  $t = 1.0$  s, and then again with  $t = 2.0$  s. This yields two equations for the two unknowns,  $v_0$  and  $a$ :

$$0.0 - (-2.0 \text{ m}) = v_0 (1.0 \text{ s}) + \frac{1}{2} a (1.0 \text{ s})^2$$

$$6.0 \text{ m} - (-2.0 \text{ m}) = v_0 (2.0 \text{ s}) + \frac{1}{2} a (2.0 \text{ s})^2.$$

Solving these simultaneous equations yields the results  $v_0 = 0$  and  $a = 4.0 \text{ m/s}^2$ .

(b) The fact that the answer is positive tells us that the acceleration vector points in the  $+x$  direction.

36. We assume the train accelerates from rest ( $v_0 = 0$  and  $x_0 = 0$ ) at  $a_1 = +1.34 \text{ m/s}^2$  until the midway point and then decelerates at  $a_2 = -1.34 \text{ m/s}^2$  until it comes to a stop ( $v_2 = 0$ ) at the next station. The velocity at the midpoint is  $v_1$  which occurs at  $x_1 = 806/2 = 403 \text{ m}$ .

(a) Eq. 2-16 leads to

$$v_1^2 = v_0^2 + 2a_1x_1 \Rightarrow v_1 = \sqrt{2(1.34 \text{ m/s}^2)(403 \text{ m})} = 32.9 \text{ m/s}.$$

(b) The time  $t_1$  for the accelerating stage is (using Eq. 2-15)


$$x_1 = v_0t_1 + \frac{1}{2}a_1t_1^2 \Rightarrow t_1 = \sqrt{\frac{2(403 \text{ m})}{1.34 \text{ m/s}^2}} = 24.53 \text{ s}.$$

Since the time interval for the decelerating stage turns out to be the same, we double this result and obtain  $t = 49.1 \text{ s}$  for the travel time between stations.

(c) With a “dead time” of 20 s, we have  $T = t + 20 = 69.1 \text{ s}$  for the total time between start-ups. Thus, Eq. 2-2 gives

$$v_{\text{avg}} = \frac{806 \text{ m}}{69.1 \text{ s}} = 11.7 \text{ m/s}.$$

(d) The graphs for  $x$ ,  $v$  and  $a$  as a function of  $t$  are shown below. SI units are understood. The third graph,  $a(t)$ , consists of three horizontal “steps” — one at 1.34 during  $0 < t < 24.53$  and the next at  $-1.34$  during  $24.53 < t < 49.1$  and the last at zero during the “dead time”  $49.1 < t < 69.1$ .

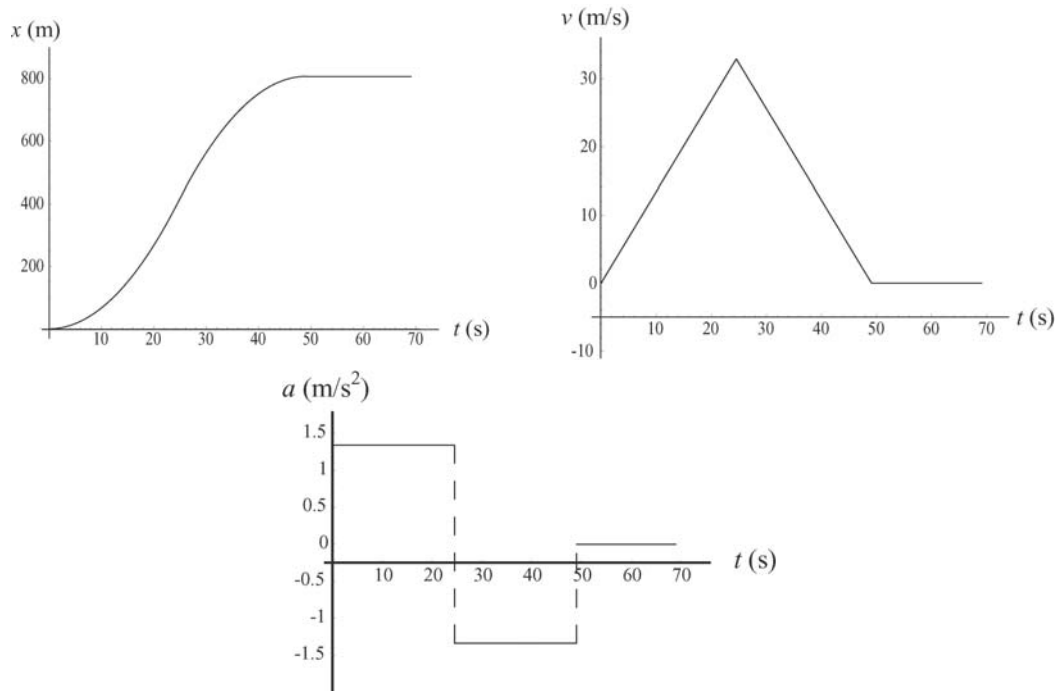



37. (a) We note that  $v_A = 12/6 = 2$  m/s (with two significant figures understood). Therefore, with an initial  $x$  value of 20 m, car A will be at  $x = 28$  m when  $t = 4$  s. This must be the value of  $x$  for car B at that time; we use Eq. 2-15:

$$28 \text{ m} = (12 \text{ m/s})t + \frac{1}{2} a_B t^2 \quad \text{where } t = 4.0 \text{ s}.$$


This yields  $a_B = -2.5 \text{ m/s}^2$ .

(b) The question is: using the value obtained for  $a_B$  in part (a), are there other values of  $t$  (besides  $t = 4$  s) such that  $x_A = x_B$ ? The requirement is

$$20 + 2t = 12t + \frac{1}{2} a_B t^2$$

where  $a_B = -5/2$ . There are two distinct roots unless the discriminant  $\sqrt{10^2 - 2(-20)(a_B)}$  is zero. In our case, it is zero – which means there is only one root. The cars are side by side only once at  $t = 4$  s.

(c) A sketch is shown below. It consists of a straight line ( $x_A$ ) tangent to a parabola ( $x_B$ ) at  $t = 4$ .

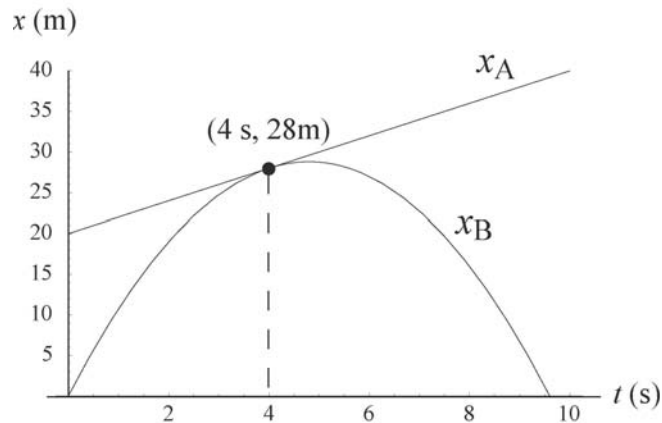

(d) We only care about real roots, which means  $10^2 - 2(-20)(a_B) \geq 0$ . If  $|a_B| > 5/2$  then there are no (real) solutions to the equation; the cars are never side by side.

(e) Here we have  $10^2 - 2(-20)(a_B) > 0 \Rightarrow$  two real roots. The cars are side by side at two different times.

38. We take the direction of motion as  $+x$ , so  $a = -5.18 \text{ m/s}^2$ , and we use SI units, so  $v_0 = 55(1000/3600) = 15.28 \text{ m/s}$ .

(a) The velocity is constant during the reaction time  $T$ , so the distance traveled during it is  $d_r = v_0 T = (15.28 \text{ m/s})(0.75 \text{ s}) = 11.46 \text{ m}$ .

We use Eq. 2-16 (with  $v = 0$ ) to find the distance  $d_b$  traveled during braking:

$$v^2 = v_0^2 + 2ad_b \Rightarrow d_b = -\frac{(15.28 \text{ m/s})^2}{2(-5.18 \text{ m/s}^2)}$$

which yields  $d_b = 22.53 \text{ m}$ . Thus, the total distance is  $d_r + d_b = 34.0 \text{ m}$ , which means that the driver *is* able to stop in time. And if the driver were to continue at  $v_0$ , the car would enter the intersection in  $t = (40 \text{ m})/(15.28 \text{ m/s}) = 2.6 \text{ s}$  which is (barely) enough time to enter the intersection before the light turns, which many people would consider an acceptable situation.

(b) In this case, the total distance to stop (found in part (a) to be  $34 \text{ m}$ ) is greater than the distance to the intersection, so the driver cannot stop without the front end of the car being a couple of meters into the intersection. And the time to reach it at constant speed is  $32/15.28 = 2.1 \text{ s}$ , which is too long (the light turns in  $1.8 \text{ s}$ ). The driver is caught between a rock and a hard place.

39. The displacement ( $\Delta x$ ) for each train is the “area” in the graph (since the displacement is the integral of the velocity). Each area is triangular, and the area of a triangle is  $1/2(\text{base}) \times (\text{height})$ . Thus, the (absolute value of the) displacement for one train  $(1/2)(40 \text{ m/s})(5 \text{ s}) = 100 \text{ m}$ , and that of the other train is  $(1/2)(30 \text{ m/s})(4 \text{ s}) = 60 \text{ m}$ . The initial “gap” between the trains was 200 m, and according to our displacement computations, the gap has narrowed by 160 m. Thus, the answer is  $200 - 160 = 40 \text{ m}$ .

40. Let  $d$  be the 220 m distance between the cars at  $t = 0$ , and  $v_1$  be the 20 km/h = 50/9 m/s speed (corresponding to a passing point of  $x_1 = 44.5$  m) and  $v_2$  be the 40 km/h = 100/9 m/s speed (corresponding to passing point of  $x_2 = 76.6$  m) of the red car. We have two equations (based on Eq. 2-17):

$$d - x_1 = v_0 t_1 + \frac{1}{2} a t_1^2 \quad \text{where } t_1 = x_1 / v_1$$

$$d - x_2 = v_0 t_2 + \frac{1}{2} a t_2^2 \quad \text{where } t_2 = x_2 / v_2$$

We simultaneously solve these equations and obtain the following results:

(a)  $v_0 = -13.9$  m/s. or roughly  $-50$  km/h (the negative sign means that it's along the  $-x$  direction).

(b)  $a = -2.0$  m/s<sup>2</sup> (the negative sign means that it's along the  $-x$  direction).

41. The positions of the cars as a function of time are given by

$$x_r(t) = x_{r0} + \frac{1}{2}a_r t^2 = (-35.0 \text{ m}) + \frac{1}{2}a_r t^2$$

$$x_g(t) = x_{g0} + v_g t = (270 \text{ m}) - (20 \text{ m/s})t$$

where we have substituted the velocity and not the speed for the green car. The two cars pass each other at  $t = 12.0 \text{ s}$  when the graphed lines cross. This implies that

$$(270 \text{ m}) - (20 \text{ m/s})(12.0 \text{ s}) = 30 \text{ m} = (-35.0 \text{ m}) + \frac{1}{2}a_r (12.0 \text{ s})^2$$

which can be solved to give  $a_r = 0.90 \text{ m/s}^2$ .

1. A vector  $\vec{a}$  can be represented in the *magnitude-angle* notation  $(a, \theta)$ , where

$$a = \sqrt{a_x^2 + a_y^2}$$

is the magnitude and

$$\theta = \tan^{-1} \left( \frac{a_y}{a_x} \right)$$

is the angle  $\vec{a}$  makes with the positive  $x$  axis.

(a) Given  $A_x = -25.0$  m and  $A_y = 40.0$  m,  $A = \sqrt{(-25.0 \text{ m})^2 + (40.0 \text{ m})^2} = 47.2$  m

(b) Recalling that  $\tan \theta = \tan (\theta + 180^\circ)$ ,  $\tan^{-1} [(40.0 \text{ m}) / (-25.0 \text{ m})] = -58^\circ$  or  $122^\circ$ . Noting that the vector is in the third quadrant (by the signs of its  $x$  and  $y$  components) we see that  $122^\circ$  is the correct answer. The graphical calculator “shortcuts” mentioned above are designed to correctly choose the right possibility.

2. The angle described by a full circle is  $360^\circ = 2\pi$  rad, which is the basis of our conversion factor.

(a)

$$20.0^\circ = (20.0^\circ) \frac{2\pi \text{ rad}}{360^\circ} = 0.349 \text{ rad}.$$

(b)

$$50.0^\circ = (50.0^\circ) \frac{2\pi \text{ rad}}{360^\circ} = 0.873 \text{ rad}.$$

(c)

$$100^\circ = (100^\circ) \frac{2\pi \text{ rad}}{360^\circ} = 1.75 \text{ rad}.$$

(d)

$$0.330 \text{ rad} = (0.330 \text{ rad}) \frac{360^\circ}{2\pi \text{ rad}} = 18.9^\circ.$$

(e)

$$2.10 \text{ rad} = (2.10 \text{ rad}) \frac{360^\circ}{2\pi \text{ rad}} = 120^\circ.$$

(f)

$$7.70 \text{ rad} = (7.70 \text{ rad}) \frac{360^\circ}{2\pi \text{ rad}} = 441^\circ.$$

3. The  $x$  and the  $y$  components of a vector  $\vec{a}$  lying on the  $xy$  plane are given by

$$a_x = a \cos \theta, \quad a_y = a \sin \theta$$

where  $a = |\vec{a}|$  is the magnitude and  $\theta$  is the angle between  $\vec{a}$  and the positive  $x$  axis.

(a) The  $x$  component of  $\vec{a}$  is given by  $a_x = 7.3 \cos 250^\circ = -2.5$  m.

(b) and the  $y$  component is given by  $a_y = 7.3 \sin 250^\circ = -6.9$  m.

In considering the variety of ways to compute these, we note that the vector is  $70^\circ$  below the  $-x$  axis, so the components could also have been found from  $a_x = -7.3 \cos 70^\circ$  and  $a_y = -7.3 \sin 70^\circ$ . In a similar vein, we note that the vector is  $20^\circ$  to the left from the  $-y$  axis, so one could use  $a_x = -7.3 \sin 20^\circ$  and  $a_y = -7.3 \cos 20^\circ$  to achieve the same results.



4. (a) The height is  $h = d \sin \theta$ , where  $d = 12.5$  m and  $\theta = 20.0^\circ$ . Therefore,  $h = 4.28$  m.

(b) The horizontal distance is  $d \cos \theta = 11.7$  m.

5. The vector sum of the displacements  $\vec{d}_{\text{storm}}$  and  $\vec{d}_{\text{new}}$  must give the same result as its originally intended displacement  $\vec{d}_o = (120 \text{ km})\hat{j}$  where east is  $\hat{i}$ , north is  $\hat{j}$ . Thus, we write

$$\vec{d}_{\text{storm}} = (100 \text{ km})\hat{i}, \quad \vec{d}_{\text{new}} = A\hat{i} + B\hat{j}.$$

(a) The equation  $\vec{d}_{\text{storm}} + \vec{d}_{\text{new}} = \vec{d}_o$  readily yields  $A = -100 \text{ km}$  and  $B = 120 \text{ km}$ . The magnitude of  $\vec{d}_{\text{new}}$  is therefore equal to  $|\vec{d}_{\text{new}}| = \sqrt{A^2 + B^2} = 156 \text{ km}$ .

(b) The direction is  $\tan^{-1}(B/A) = -50.2^\circ$  or  $180^\circ + (-50.2^\circ) = 129.8^\circ$ . We choose the latter value since it indicates a vector pointing in the second quadrant, which is what we expect here. The answer can be phrased several equivalent ways:  $129.8^\circ$  counterclockwise from east, or  $39.8^\circ$  west from north, or  $50.2^\circ$  north from west.

6. (a) With  $r = 15$  m and  $\theta = 30^\circ$ , the  $x$  component of  $\vec{r}$  is given by


$$r_x = r \cos \theta = (15 \text{ m}) \cos 30^\circ = 13 \text{ m}.$$

(b) Similarly, the  $y$  component is given by  $r_y = r \sin \theta = (15 \text{ m}) \sin 30^\circ = 7.5 \text{ m}$ .

7. The length unit meter is understood throughout the calculation.

(a) We compute the distance from one corner to the diametrically opposite corner:

$$\sqrt{(3.00 \text{ m})^2 + (3.70 \text{ m})^2 + (4.30 \text{ m})^2}.$$

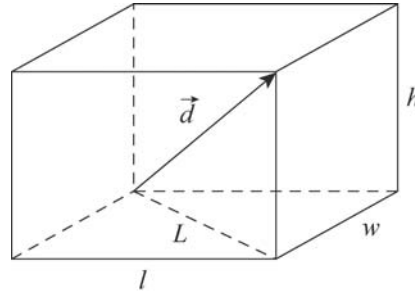

(b) The displacement vector is along the straight line from the beginning to the end point of the trip. Since a straight line is the shortest distance between two points, the length of the path cannot be less than the magnitude of the displacement.


(c) It can be greater, however. The fly might, for example, crawl along the edges of the room. Its displacement would be the same but the path length would be  $\ell + w + h = 11.0 \text{ m}$ .

(d) The path length is the same as the magnitude of the displacement if the fly flies along the displacement vector.

(e) We take the  $x$  axis to be out of the page, the  $y$  axis to be to the right, and the  $z$  axis to be upward. Then the  $x$  component of the displacement is  $w = 3.70 \text{ m}$ , the  $y$  component of the displacement is  $4.30 \text{ m}$ , and the  $z$  component is  $3.00 \text{ m}$ . Thus,

$$\vec{d} = (3.70 \text{ m})\hat{i} + (4.30 \text{ m})\hat{j} + (3.00 \text{ m})\hat{k}.$$


An equally correct answer is gotten by interchanging the length, width, and height.

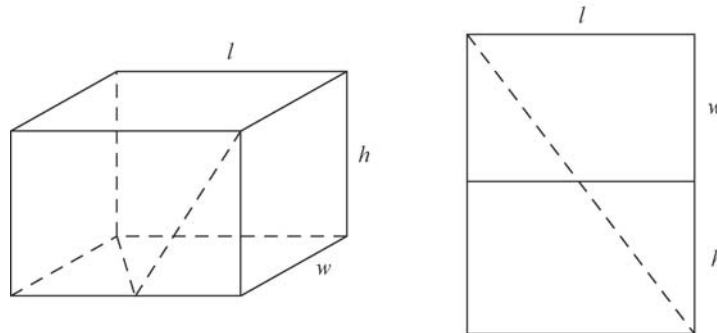

(f) Suppose the path of the fly is as shown by the dotted lines on the upper diagram. Pretend there is a hinge where the front wall of the room joins the floor and lay the wall down as shown on the lower diagram. The shortest walking distance between the lower left back of the room and the upper right front corner is the dotted straight line shown on the diagram. Its length is

$$L_{\min} = \sqrt{(w + h)^2 + \ell^2} = \sqrt{(3.70 \text{ m} + 3.00 \text{ m})^2 + (4.30 \text{ m})^2} = 7.96 \text{ m} .$$

8. We label the displacement vectors  $\vec{A}$ ,  $\vec{B}$  and  $\vec{C}$  (and denote the result of their vector sum as  $\vec{r}$ ). We choose *east* as the  $\hat{i}$  direction (+x direction) and *north* as the  $\hat{j}$  direction (+y direction). We note that the angle between  $\vec{C}$  and the x axis is  $60^\circ$ . Thus,

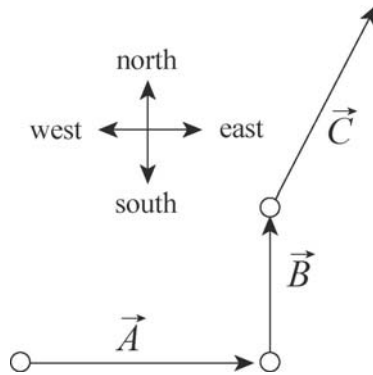

$$\vec{A} = (50 \text{ km})\hat{i}$$

$$\vec{B} = (30 \text{ km})\hat{j}$$

$$\vec{C} = (25 \text{ km}) \cos(60^\circ) \hat{i} + (25 \text{ km}) \sin(60^\circ) \hat{j}$$

(a) The total displacement of the car from its initial position is represented by

$$\vec{r} = \vec{A} + \vec{B} + \vec{C} = (62.5 \text{ km})\hat{i} + (51.7 \text{ km})\hat{j}$$

which means that its magnitude is

$$|\vec{r}| = \sqrt{(62.5 \text{ km})^2 + (51.7 \text{ km})^2} = 81 \text{ km}.$$

(b) The angle (counterclockwise from +x axis) is  $\tan^{-1}(51.7 \text{ km}/62.5 \text{ km}) = 40^\circ$ , which is to say that it points  $40^\circ$  *north of east*. Although the resultant  $\vec{r}$  is shown in our sketch, it would be a direct line from the “tail” of  $\vec{A}$  to the “head” of  $\vec{C}$ .

9. We write  $\vec{r} = \vec{a} + \vec{b}$ . When not explicitly displayed, the units here are assumed to be meters.

(a) The  $x$  and the  $y$  components of  $\vec{r}$  are  $r_x = a_x + b_x = (4.0 \text{ m}) - (13 \text{ m}) = -9.0 \text{ m}$  and  $r_y = a_y + b_y = (3.0 \text{ m}) + (7.0 \text{ m}) = 10 \text{ m}$ , respectively. Thus  $\vec{r} = (-9.0 \text{ m})\hat{i} + (10 \text{ m})\hat{j}$ .

(b) The magnitude of  $\vec{r}$  is

$$r = |\vec{r}| = \sqrt{r_x^2 + r_y^2} = \sqrt{(-9.0 \text{ m})^2 + (10 \text{ m})^2} = 13 \text{ m}.$$


(c) The angle between the resultant and the  $+x$  axis is given by

$$\theta = \tan^{-1}(r_y/r_x) = \tan^{-1} [(10 \text{ m})/(-9.0 \text{ m})] = -48^\circ \text{ or } 132^\circ.$$

Since the  $x$  component of the resultant is negative and the  $y$  component is positive, characteristic of the second quadrant, we find the angle is  $132^\circ$  (measured counterclockwise from  $+x$  axis).

10. We label the displacement vectors  $\vec{A}$ ,  $\vec{B}$  and  $\vec{C}$  (and denote the result of their vector sum as  $\vec{r}$ ). We choose *east* as the  $\hat{i}$  direction ( $+x$  direction) and *north* as the  $\hat{j}$  direction ( $+y$  direction) All distances are understood to be in kilometers.

(a) The vector diagram representing the motion is shown below:

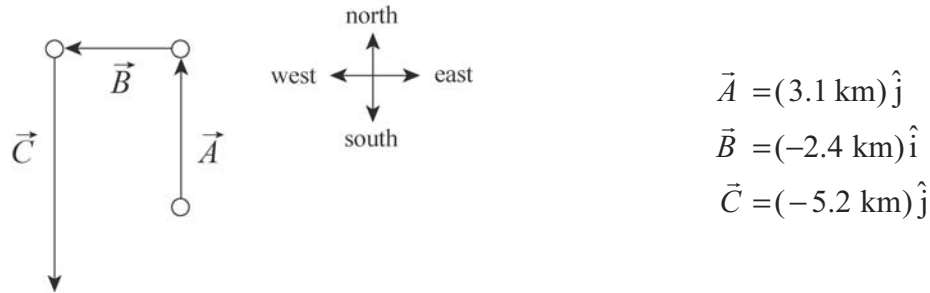

(b) The final point is represented by

$$\vec{r} = \vec{A} + \vec{B} + \vec{C} = (-2.4 \text{ km})\hat{i} + (-2.1 \text{ km})\hat{j}$$

whose magnitude is

$$|\vec{r}| = \sqrt{(-2.4 \text{ km})^2 + (-2.1 \text{ km})^2} \approx 3.2 \text{ km} .$$

(c) There are two possibilities for the angle:

$$\theta = \tan^{-1}\left(\frac{-2.1 \text{ km}}{-2.4 \text{ km}}\right) = 41^\circ, \text{ or } 221^\circ .$$

We choose the latter possibility since  $\vec{r}$  is in the third quadrant. It should be noted that many graphical calculators have polar  $\leftrightarrow$  rectangular “shortcuts” that automatically produce the correct answer for angle (measured counterclockwise from the  $+x$  axis). We may phrase the angle, then, as  $221^\circ$  counterclockwise from East (a phrasing that sounds peculiar, at best) or as  $41^\circ$  south from west or  $49^\circ$  west from south. The resultant  $\vec{r}$  is not shown in our sketch; it would be an arrow directed from the “tail” of  $\vec{A}$  to the “head” of  $\vec{C}$ .



11. We find the components and then add them (as scalars, not vectors). With  $d = 3.40$  km and  $\theta = 35.0^\circ$  we find  $d \cos \theta + d \sin \theta = 4.74$  km.

12. (a)  $\vec{a} + \vec{b} = (3.0\hat{i} + 4.0\hat{j})\text{ m} + (5.0\hat{i} - 2.0\hat{j})\text{ m} = (8.0\text{ m})\hat{i} + (2.0\text{ m})\hat{j}.$

(b) The magnitude of  $\vec{a} + \vec{b}$  is

$$|\vec{a} + \vec{b}| = \sqrt{(8.0\text{ m})^2 + (2.0\text{ m})^2} = 8.2\text{ m}.$$

(c) The angle between this vector and the  $+x$  axis is  $\tan^{-1}[(2.0\text{ m})/(8.0\text{ m})] = 14^\circ.$

(d)  $\vec{b} - \vec{a} = (5.0\hat{i} - 2.0\hat{j})\text{ m} - (3.0\hat{i} + 4.0\hat{j})\text{ m} = (2.0\text{ m})\hat{i} - (6.0\text{ m})\hat{j}.$

(e) The magnitude of the difference vector  $\vec{b} - \vec{a}$  is

$$|\vec{b} - \vec{a}| = \sqrt{(2.0\text{ m})^2 + (-6.0\text{ m})^2} = 6.3\text{ m}.$$

(f) The angle between this vector and the  $+x$  axis is  $\tan^{-1}[(-6.0\text{ m})/(2.0\text{ m})] = -72^\circ.$  The vector is  $72^\circ$  *clockwise* from the axis defined by  $\hat{i}.$

13. All distances in this solution are understood to be in meters.

(a)  $\vec{a} + \vec{b} = [4.0 + (-1.0)]\hat{i} + [(-3.0) + 1.0]\hat{j} + (1.0 + 4.0)\hat{k} = (3.0\hat{i} - 2.0\hat{j} + 5.0\hat{k}) \text{ m}.$

(b)  $\vec{a} - \vec{b} = [4.0 - (-1.0)]\hat{i} + [(-3.0) - 1.0]\hat{j} + (1.0 - 4.0)\hat{k} = (5.0\hat{i} - 4.0\hat{j} - 3.0\hat{k}) \text{ m}.$

(c) The requirement  $\vec{a} - \vec{b} + \vec{c} = 0$  leads to  $\vec{c} = \vec{b} - \vec{a}$ , which we note is the opposite of what we found in part (b). Thus,  $\vec{c} = (-5.0\hat{i} + 4.0\hat{j} + 3.0\hat{k}) \text{ m}.$

14. The  $x$ ,  $y$  and  $z$  components of  $\vec{r} = \vec{c} + \vec{d}$  are, respectively,

(a)  $r_x = c_x + d_x = 7.4 \text{ m} + 4.4 \text{ m} = 12 \text{ m}$ ,

(b)  $r_y = c_y + d_y = -3.8 \text{ m} - 2.0 \text{ m} = -5.8 \text{ m}$ , and

(c)  $r_z = c_z + d_z = -6.1 \text{ m} + 3.3 \text{ m} = -2.8 \text{ m}$ .

15. Reading carefully, we see that the  $(x, y)$  specifications for each “dart” are to be interpreted as  $(\Delta x, \Delta y)$  descriptions of the corresponding displacement vectors. We combine the different parts of this problem into a single exposition.

(a) Along the  $x$  axis, we have (with the centimeter unit understood)

$$30.0 + b_x - 20.0 - 80.0 = -140,$$

which gives  $b_x = -70.0$  cm.

(b) Along the  $y$  axis we have

$$40.0 - 70.0 + c_y - 70.0 = -20.0$$

which yields  $c_y = 80.0$  cm.

(c) The magnitude of the final location  $(-140, -20.0)$  is  $\sqrt{(-140)^2 + (-20.0)^2} = 141$  cm.

(d) Since the displacement is in the third quadrant, the angle of the overall displacement is given by  $\pi + \tan^{-1}[(-20.0)/(-140)]$  or  $188^\circ$  counterclockwise from the  $+x$  axis ( $172^\circ$  clockwise from the  $+x$  axis).

16. If we wish to use Eq. 3-5 in an unmodified fashion, we should note that the angle between  $\vec{C}$  and the  $+x$  axis is  $180^\circ + 20.0^\circ = 200^\circ$ .

(a) The  $x$  and  $y$  components of  $\vec{B}$  are given by

$$\begin{aligned} B_x &= C_x - A_x = (15.0 \text{ m}) \cos 200^\circ - (12.0 \text{ m}) \cos 40^\circ = -23.3 \text{ m}, \\ B_y &= C_y - A_y = (15.0 \text{ m}) \sin 200^\circ - (12.0 \text{ m}) \sin 40^\circ = -12.8 \text{ m}. \end{aligned}$$

Consequently, its magnitude is  $|\vec{B}| = \sqrt{(-23.3 \text{ m})^2 + (-12.8 \text{ m})^2} = 26.6 \text{ m}$ .

(b) The two possibilities presented by a simple calculation for the angle between  $\vec{B}$  and the  $+x$  axis are  $\tan^{-1}[(-12.8 \text{ m})/(-23.3 \text{ m})] = 28.9^\circ$ , and  $180^\circ + 28.9^\circ = 209^\circ$ . We choose the latter possibility as the correct one since it indicates that  $\vec{B}$  is in the third quadrant (indicated by the signs of its components). We note, too, that the answer can be equivalently stated as  $-151^\circ$ .

17. It should be mentioned that an efficient way to work this vector addition problem is with the cosine law for general triangles (and since  $\vec{a}$ ,  $\vec{b}$  and  $\vec{r}$  form an isosceles triangle, the angles are easy to figure). However, in the interest of reinforcing the usual systematic approach to vector addition, we note that the angle  $\vec{b}$  makes with the  $+x$  axis is  $30^\circ + 105^\circ = 135^\circ$  and apply Eq. 3-5 and Eq. 3-6 where appropriate.

(a) The  $x$  component of  $\vec{r}$  is  $r_x = (10.0 \text{ m}) \cos 30^\circ + (10.0 \text{ m}) \cos 135^\circ = 1.59 \text{ m}$ .

(b) The  $y$  component of  $\vec{r}$  is  $r_y = (10.0 \text{ m}) \sin 30^\circ + (10.0 \text{ m}) \sin 135^\circ = 12.1 \text{ m}$ .

(c) The magnitude of  $\vec{r}$  is  $r = |\vec{r}| = \sqrt{(1.59 \text{ m})^2 + (12.1 \text{ m})^2} = 12.2 \text{ m}$ .

(d) The angle between  $\vec{r}$  and the  $+x$  direction is  $\tan^{-1}[(12.1 \text{ m})/(1.59 \text{ m})] = 82.5^\circ$ .

18. (a) Summing the  $x$  components, we have

$$20 \text{ m} + b_x - 20 \text{ m} - 60 \text{ m} = -140 \text{ m},$$

which gives  $b_x = -80 \text{ m}$ .

(b) Summing the  $y$  components, we have

$$60 \text{ m} - 70 \text{ m} + c_y - 70 \text{ m} = 30 \text{ m},$$

which implies  $c_y = 110 \text{ m}$ .

(c) Using the Pythagorean theorem, the magnitude of the overall displacement is given by

$$\sqrt{(-140 \text{ m})^2 + (30 \text{ m})^2} \approx 143 \text{ m}.$$

(d) The angle is given by  $\tan^{-1}(30/(-140)) = -12^\circ$ , (which would be  $12^\circ$  measured clockwise from the  $-x$  axis, or  $168^\circ$  measured counterclockwise from the  $+x$  axis)



19. Many of the operations are done efficiently on most modern graphical calculators using their built-in vector manipulation and rectangular  $\leftrightarrow$  polar “shortcuts.” In this solution, we employ the “traditional” methods (such as Eq. 3-6). Where the length unit is not displayed, the unit meter should be understood.

(a) Using unit-vector notation,

$$\begin{aligned}\vec{a} &= (50 \text{ m}) \cos(30^\circ) \hat{i} + (50 \text{ m}) \sin(30^\circ) \hat{j} \\ \vec{b} &= (50 \text{ m}) \cos(195^\circ) \hat{i} + (50 \text{ m}) \sin(195^\circ) \hat{j} \\ \vec{c} &= (50 \text{ m}) \cos(315^\circ) \hat{i} + (50 \text{ m}) \sin(315^\circ) \hat{j} \\ \vec{a} + \vec{b} + \vec{c} &= (30.4 \text{ m}) \hat{i} - (23.3 \text{ m}) \hat{j}.\end{aligned}$$

The magnitude of this result is  $\sqrt{(30.4 \text{ m})^2 + (-23.3 \text{ m})^2} = 38 \text{ m}$ .

(b) The two possibilities presented by a simple calculation for the angle between the vector described in part (a) and the  $+x$  direction are  $\tan^{-1}[(-23.2 \text{ m})/(30.4 \text{ m})] = -37.5^\circ$ , and  $180^\circ + (-37.5^\circ) = 142.5^\circ$ . The former possibility is the correct answer since the vector is in the fourth quadrant (indicated by the signs of its components). Thus, the angle is  $-37.5^\circ$ , which is to say that it is  $37.5^\circ$  *clockwise* from the  $+x$  axis. This is equivalent to  $322.5^\circ$  counterclockwise from  $+x$ .

(c) We find

$$\vec{a} - \vec{b} + \vec{c} = [43.3 - (-48.3) + 35.4] \hat{i} - [25 - (-12.9) + (-35.4)] \hat{j} = (127 \hat{i} + 2.60 \hat{j}) \text{ m}$$

in unit-vector notation. The magnitude of this result is

$$|\vec{a} - \vec{b} + \vec{c}| = \sqrt{(127 \text{ m})^2 + (2.6 \text{ m})^2} \approx 1.30 \times 10^2 \text{ m}.$$

(d) The angle between the vector described in part (c) and the  $+x$  axis is  $\tan^{-1}(2.6 \text{ m}/127 \text{ m}) \approx 1.2^\circ$ .

(e) Using unit-vector notation,  $\vec{d}$  is given by  $\vec{d} = \vec{a} + \vec{b} - \vec{c} = (-40.4 \hat{i} + 47.4 \hat{j}) \text{ m}$ , which has a magnitude of  $\sqrt{(-40.4 \text{ m})^2 + (47.4 \text{ m})^2} = 62 \text{ m}$ .

(f) The two possibilities presented by a simple calculation for the angle between the vector described in part (e) and the  $+x$  axis are  $\tan^{-1}(47.4/(-40.4)) = -50.0^\circ$ , and  $180^\circ + (-50.0^\circ) = 130^\circ$ . We choose the latter possibility as the correct one since it indicates that  $\vec{d}$  is in the second quadrant (indicated by the signs of its components).

20. Angles are given in ‘standard’ fashion, so Eq. 3-5 applies directly. We use this to write the vectors in unit-vector notation before adding them. However, a very different-looking approach using the special capabilities of most graphical calculators can be imagined. Wherever the length unit is not displayed in the solution below, the unit meter should be understood.

(a) Allowing for the different angle units used in the problem statement, we arrive at

$$\vec{E} = 3.73 \hat{i} + 4.70 \hat{j}$$

$$\vec{F} = 1.29 \hat{i} - 4.83 \hat{j}$$

$$\vec{G} = 1.45 \hat{i} + 3.73 \hat{j}$$

$$\vec{H} = -5.20 \hat{i} + 3.00 \hat{j}$$

$$\vec{E} + \vec{F} + \vec{G} + \vec{H} = 1.28 \hat{i} + 6.60 \hat{j}.$$

(b) The magnitude of the vector sum found in part (a) is  $\sqrt{(1.28 \text{ m})^2 + (6.60 \text{ m})^2} = 6.72 \text{ m}$ .

(c) Its angle measured counterclockwise from the  $+x$  axis is  $\tan^{-1}(6.60/1.28) = 79.0^\circ$ .

(d) Using the conversion factor  $\pi \text{ rad} = 180^\circ$ ,  $79.0^\circ = 1.38 \text{ rad}$ .

21. (a) With  $\hat{i}$  directed forward and  $\hat{j}$  directed leftward, then the resultant is  $(5.00 \hat{i} + 2.00 \hat{j})$  m. The magnitude is given by the Pythagorean theorem:  $\sqrt{(5.00 \text{ m})^2 + (2.00 \text{ m})^2} = 5.385 \text{ m} \approx 5.39 \text{ m}$ .

(b) The angle is  $\tan^{-1}(2.00/5.00) \approx 21.8^\circ$  (left of forward).

22. The desired result is the displacement vector, in units of km,  $\vec{A} = (5.6 \text{ km}), 90^\circ$  (measured counterclockwise from the  $+x$  axis), or  $\vec{A} = (5.6 \text{ km})\hat{j}$ , where  $\hat{j}$  is the unit vector along the positive  $y$  axis (north). This consists of the sum of two displacements: during the whiteout,  $\vec{B} = (7.8 \text{ km}), 50^\circ$ , or

$$\vec{B} = (7.8 \text{ km})(\cos 50^\circ \hat{i} + \sin 50^\circ \hat{j}) = (5.01 \text{ km})\hat{i} + (5.98 \text{ km})\hat{j}$$

and the unknown  $\vec{C}$ . Thus,  $\vec{A} = \vec{B} + \vec{C}$ .

(a) The desired displacement is given by  $\vec{C} = \vec{A} - \vec{B} = (-5.01 \text{ km})\hat{i} - (0.38 \text{ km})\hat{j}$ . The magnitude is  $\sqrt{(-5.01 \text{ km})^2 + (-0.38 \text{ km})^2} = 5.0 \text{ km}$ .

(b) The angle is  $\tan^{-1}[(-0.38 \text{ km})/(-5.01 \text{ km})] = 4.3^\circ$ , south of due west.

23. The strategy is to find where the camel is (  $\vec{C}$  ) by adding the two consecutive displacements described in the problem, and then finding the difference between that location and the oasis (  $\vec{B}$  ). Using the magnitude-angle notation

$$\vec{C} = (24 \angle -15^\circ) + (8.0 \angle 90^\circ) = (23.25 \angle 4.41^\circ)$$

so

$$\vec{B} - \vec{C} = (25 \angle 0^\circ) - (23.25 \angle 4.41^\circ) = (2.5 \angle -45^\circ)$$

which is efficiently implemented using a vector capable calculator in polar mode. The distance is therefore 2.6 km.

24. Let  $\vec{A}$  represent the first part of Beetle 1's trip (0.50 m east or  $0.5 \hat{i}$ ) and  $\vec{C}$  represent the first part of Beetle 2's trip intended voyage (1.6 m at  $50^\circ$  north of east). For their respective second parts:  $\vec{B}$  is 0.80 m at  $30^\circ$  north of east and  $\vec{D}$  is the unknown. The final position of Beetle 1 is

$$\vec{A} + \vec{B} = (0.5 \text{ m})\hat{i} + (0.8 \text{ m})(\cos 30^\circ \hat{i} + \sin 30^\circ \hat{j}) = (1.19 \text{ m})\hat{i} + (0.40 \text{ m})\hat{j}.$$

The equation relating these is  $\vec{A} + \vec{B} = \vec{C} + \vec{D}$ , where

$$\vec{C} = (1.60 \text{ m})(\cos 50.0^\circ \hat{i} + \sin 50.0^\circ \hat{j}) = (1.03 \text{ m})\hat{i} + (1.23 \text{ m})\hat{j}$$

(a) We find  $\vec{D} = \vec{A} + \vec{B} - \vec{C} = (0.16 \text{ m})\hat{i} + (-0.83 \text{ m})\hat{j}$ , and the magnitude is  $D = 0.84 \text{ m}$ .

(b) The angle is  $\tan^{-1}(-0.83/0.16) = -79^\circ$  which is interpreted to mean  $79^\circ$  south of east (or  $11^\circ$  east of south).

25. The resultant (along the  $y$  axis, with the same magnitude as  $\vec{C}$ ) forms (along with  $\vec{C}$ ) a side of an isosceles triangle (with  $\vec{B}$  forming the base). If the angle between  $\vec{C}$  and the  $y$  axis is  $\theta = \tan^{-1}(3/4) = 36.87^\circ$ , then it should be clear that (referring to the magnitudes of the vectors)  $B = 2C \sin(\theta/2)$ . Thus (since  $C = 5.0$ ) we find  $B = 3.2$ .

26. As a vector addition problem, we express the situation (described in the problem statement) as  $\vec{A} + \vec{B} = (3A)\hat{j}$ , where  $\vec{A} = A\hat{i}$  and  $B = 7.0$  m. Since  $\hat{i} \perp \hat{j}$  we may use the Pythagorean theorem to express  $B$  in terms of the magnitudes of the other two vectors:

$$B = \sqrt{(3A)^2 + A^2} \quad \Rightarrow \quad A = \frac{1}{\sqrt{10}} B = 2.2 \text{ m} .$$



27. Let  $l_0 = 2.0 \text{ cm}$  be the length of each segment. The nest is located at the endpoint of segment  $w$ .

(a) Using unit-vector notation, the displacement vector for point A is

$$\begin{aligned}\vec{d}_A &= \vec{w} + \vec{v} + \vec{i} + \vec{h} = l_0(\cos 60^\circ \hat{i} + \sin 60^\circ \hat{j}) + (l_0 \hat{j}) + l_0(\cos 120^\circ \hat{i} + \sin 120^\circ \hat{j}) + (l_0 \hat{j}) \\ &= (2 + \sqrt{3})l_0 \hat{j}.\end{aligned}$$

Therefore, the magnitude of  $\vec{d}_A$  is  $|\vec{d}_A| = (2 + \sqrt{3})(2.0 \text{ cm}) = 7.5 \text{ cm}$ .

(b) The angle of  $\vec{d}_A$  is  $\theta = \tan^{-1}(d_{A,y} / d_{A,x}) = \tan^{-1}(\infty) = 90^\circ$ .

(c) Similarly, the displacement for point B is

$$\begin{aligned}\vec{d}_B &= \vec{w} + \vec{v} + \vec{j} + \vec{p} + \vec{o} \\ &= l_0(\cos 60^\circ \hat{i} + \sin 60^\circ \hat{j}) + (l_0 \hat{j}) + l_0(\cos 60^\circ \hat{i} + \sin 60^\circ \hat{j}) + l_0(\cos 30^\circ \hat{i} + \sin 30^\circ \hat{j}) + (l_0 \hat{i}) \\ &= (2 + \sqrt{3}/2)l_0 \hat{i} + (3/2 + \sqrt{3})l_0 \hat{j}.\end{aligned}$$

Therefore, the magnitude of  $\vec{d}_B$  is

$$|\vec{d}_B| = l_0 \sqrt{(2 + \sqrt{3}/2)^2 + (3/2 + \sqrt{3})^2} = (2.0 \text{ cm})(4.3) = 8.6 \text{ cm}.$$

(d) The direction of  $\vec{d}_B$  is

$$\theta_B = \tan^{-1}\left(\frac{d_{B,y}}{d_{B,x}}\right) = \tan^{-1}\left(\frac{3/2 + \sqrt{3}}{2 + \sqrt{3}/2}\right) = \tan^{-1}(1.13) = 48^\circ.$$

28. Many of the operations are done efficiently on most modern graphical calculators using their built-in vector manipulation and rectangular  $\leftrightarrow$  polar “shortcuts.” In this solution, we employ the “traditional” methods (such as Eq. 3-6).

(a) The magnitude of  $\vec{a}$  is  $a = \sqrt{(4.0 \text{ m})^2 + (-3.0 \text{ m})^2} = 5.0 \text{ m}$ .

(b) The angle between  $\vec{a}$  and the  $+x$  axis is  $\tan^{-1} [(-3.0 \text{ m})/(4.0 \text{ m})] = -37^\circ$ . The vector is  $37^\circ$  *clockwise* from the axis defined by  $\hat{i}$ .

(c) The magnitude of  $\vec{b}$  is  $b = \sqrt{(6.0 \text{ m})^2 + (8.0 \text{ m})^2} = 10 \text{ m}$ .

(d) The angle between  $\vec{b}$  and the  $+x$  axis is  $\tan^{-1} [(8.0 \text{ m})/(6.0 \text{ m})] = 53^\circ$ .

(e)  $\vec{a} + \vec{b} = (4.0 \text{ m} + 6.0 \text{ m}) \hat{i} + [(-3.0 \text{ m}) + 8.0 \text{ m}] \hat{j} = (10 \text{ m}) \hat{i} + (5.0 \text{ m}) \hat{j}$ . The magnitude of this vector is  $|\vec{a} + \vec{b}| = \sqrt{(10 \text{ m})^2 + (5.0 \text{ m})^2} = 11 \text{ m}$ ; we round to two significant figures in our results.

(f) The angle between the vector described in part (e) and the  $+x$  axis is  $\tan^{-1} [(5.0 \text{ m})/(10 \text{ m})] = 27^\circ$ .

(g)  $\vec{b} - \vec{a} = (6.0 \text{ m} - 4.0 \text{ m}) \hat{i} + [8.0 \text{ m} - (-3.0 \text{ m})] \hat{j} = (2.0 \text{ m}) \hat{i} + (11 \text{ m}) \hat{j}$ . The magnitude of this vector is  $|\vec{b} - \vec{a}| = \sqrt{(2.0 \text{ m})^2 + (11 \text{ m})^2} = 11 \text{ m}$ , which is, interestingly, the same result as in part (e) (exactly, not just to 2 significant figures) (this curious coincidence is made possible by the fact that  $\vec{a} \perp \vec{b}$ ).

(h) The angle between the vector described in part (g) and the  $+x$  axis is  $\tan^{-1} [(11 \text{ m})/(2.0 \text{ m})] = 80^\circ$ .

(i)  $\vec{a} - \vec{b} = (4.0 \text{ m} - 6.0 \text{ m}) \hat{i} + [(-3.0 \text{ m}) - 8.0 \text{ m}] \hat{j} = (-2.0 \text{ m}) \hat{i} + (-11 \text{ m}) \hat{j}$ . The magnitude of this vector is  $|\vec{a} - \vec{b}| = \sqrt{(-2.0 \text{ m})^2 + (-11 \text{ m})^2} = 11 \text{ m}$ .

(j) The two possibilities presented by a simple calculation for the angle between the vector described in part (i) and the  $+x$  direction are  $\tan^{-1} [(-11 \text{ m})/(-2.0 \text{ m})] = 80^\circ$ , and  $180^\circ + 80^\circ = 260^\circ$ . The latter possibility is the correct answer (see part (k) for a further observation related to this result).

(k) Since  $\vec{a} - \vec{b} = (-1)(\vec{b} - \vec{a})$ , they point in opposite (anti-parallel) directions; the angle between them is  $180^\circ$ .

29. Solving the simultaneous equations yields the answers:

(a)  $\vec{d}_1 = 4 \vec{d}_3 = 8 \hat{i} + 16 \hat{j}$ , and

(b)  $\vec{d}_2 = \vec{d}_3 = 2 \hat{i} + 4 \hat{j}$ .

30. The vector equation is  $\vec{R} = \vec{A} + \vec{B} + \vec{C} + \vec{D}$ . Expressing  $\vec{B}$  and  $\vec{D}$  in unit-vector notation, we have  $(1.69\hat{i} + 3.63\hat{j})$  m and  $(-2.87\hat{i} + 4.10\hat{j})$  m, respectively. Where the length unit is not displayed in the solution below, the unit meter should be understood.

(a) Adding corresponding components, we obtain  $\vec{R} = (-3.18 \text{ m})\hat{i} + (4.72 \text{ m})\hat{j}$ .

(b) Using Eq. 3-6, the magnitude is

$$|\vec{R}| = \sqrt{(-3.18 \text{ m})^2 + (4.72 \text{ m})^2} = 5.69 \text{ m}.$$

(c) The angle is


$$\theta = \tan^{-1}\left(\frac{4.72 \text{ m}}{-3.18 \text{ m}}\right) = -56.0^\circ \text{ (with } -x \text{ axis)}.$$

If measured counterclockwise from  $+x$ -axis, the angle is then  $180^\circ - 56.0^\circ = 124^\circ$ . Thus, converting the result to polar coordinates, we obtain

$$(-3.18, 4.72) \rightarrow (5.69 \angle 124^\circ)$$

31. (a) As can be seen from Figure 3-32, the point diametrically opposite the origin (0,0,0) has position vector  $a \hat{i} + a \hat{j} + a \hat{k}$  and this is the vector along the “body diagonal.”

(b) From the point  $(a, 0, 0)$  which corresponds to the position vector  $a \hat{i}$ , the diametrically opposite point is  $(0, a, a)$  with the position vector  $a \hat{j} + a \hat{k}$ . Thus, the vector along the line is the difference  $-a \hat{i} + a \hat{j} + a \hat{k}$ .

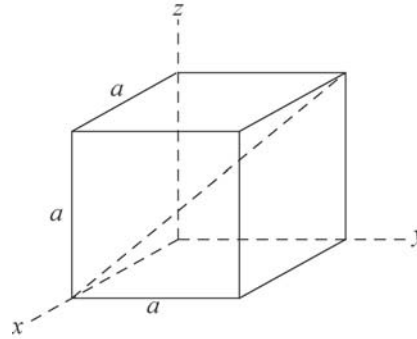

(c) If the starting point is  $(0, a, 0)$  with the corresponding position vector  $a \hat{j}$ , the diametrically opposite point is  $(a, 0, a)$  with the position vector  $a \hat{i} + a \hat{k}$ . Thus, the vector along the line is the difference  $a \hat{i} - a \hat{j} + a \hat{k}$ .

(d) If the starting point is  $(a, a, 0)$  with the corresponding position vector  $a \hat{i} + a \hat{j}$ , the diametrically opposite point is  $(0, 0, a)$  with the position vector  $a \hat{k}$ . Thus, the vector along the line is the difference  $-a \hat{i} - a \hat{j} + a \hat{k}$ .

(e) Consider the vector from the back lower left corner to the front upper right corner. It is  $a \hat{i} + a \hat{j} + a \hat{k}$ . We may think of it as the sum of the vector  $a \hat{i}$  parallel to the  $x$  axis and the vector  $a \hat{j} + a \hat{k}$  perpendicular to the  $x$  axis. The tangent of the angle between the vector and the  $x$  axis is the perpendicular component divided by the parallel component. Since the magnitude of the perpendicular component is  $\sqrt{a^2 + a^2} = a\sqrt{2}$  and the magnitude of the parallel component is  $a$ ,  $\tan \theta = (a\sqrt{2})/a = \sqrt{2}$ . Thus  $\theta = 54.7^\circ$ . The angle between the vector and each of the other two adjacent sides (the  $y$  and  $z$  axes) is the same as is the angle between any of the other diagonal vectors and any of the cube sides adjacent to them.

(f) The length of any of the diagonals is given by  $\sqrt{a^2 + a^2 + a^2} = a\sqrt{3}$ .

32. (a) With  $a = 17.0$  m and  $\theta = 56.0^\circ$  we find  $a_x = a \cos \theta = 9.51$  m.

(b) Similarly,  $a_y = a \sin \theta = 14.1$  m.

(c) The angle relative to the new coordinate system is  $\theta' = (56.0^\circ - 18.0^\circ) = 38.0^\circ$ . Thus,  $a_x' = a \cos \theta' = 13.4$  m.

(d) Similarly,  $a_y' = a \sin \theta' = 10.5$  m.

33. (a) The scalar (dot) product is  $(4.50)(7.30)\cos(320^\circ - 85.0^\circ) = -18.8$ .

(b) The vector (cross) product is in the  $\hat{k}$  direction (by the right-hand rule) with magnitude  $|(4.50)(7.30) \sin(320^\circ - 85.0^\circ)| = 26.9$ .

34. First, we rewrite the given expression as  $4( \vec{d}_{\text{plane}} \cdot \vec{d}_{\text{cross}} )$  where  $\vec{d}_{\text{plane}} = \vec{d}_1 + \vec{d}_2$  and in the plane of  $\vec{d}_1$  and  $\vec{d}_2$ , and  $\vec{d}_{\text{cross}} = \vec{d}_1 \times \vec{d}_2$ . Noting that  $\vec{d}_{\text{cross}}$  is perpendicular to the plane of  $\vec{d}_1$  and  $\vec{d}_2$ , we see that the answer must be 0 (the scalar [dot] product of perpendicular vectors is zero).



35. We apply Eq. 3-30 and Eq.3-23. If a vector-capable calculator is used, this makes a good exercise for getting familiar with those features. Here we briefly sketch the method.

(a) We note that  $\vec{b} \times \vec{c} = -8.0\hat{i} + 5.0\hat{j} + 6.0\hat{k}$ . Thus,

$$\vec{a} \cdot (\vec{b} \times \vec{c}) = (3.0)(-8.0) + (3.0)(5.0) + (-2.0)(6.0) = -21.$$

(b) We note that  $\vec{b} + \vec{c} = 1.0\hat{i} - 2.0\hat{j} + 3.0\hat{k}$ . Thus,

$$\vec{a} \cdot (\vec{b} + \vec{c}) = (3.0)(1.0) + (3.0)(-2.0) + (-2.0)(3.0) = -9.0.$$

(c) Finally,

$$\begin{aligned} \vec{a} \times (\vec{b} + \vec{c}) &= [(3.0)(3.0) - (-2.0)(-2.0)]\hat{i} + [(-2.0)(1.0) - (3.0)(3.0)]\hat{j} \\ &\quad + [(3.0)(-2.0) - (3.0)(1.0)]\hat{k} \\ &= 5\hat{i} - 11\hat{j} - 9\hat{k} \end{aligned}$$

36. We apply Eq. 3-30 and Eq. 3-23.

(a)  $\vec{a} \times \vec{b} = (a_x b_y - a_y b_x) \hat{k}$  since all other terms vanish, due to the fact that neither  $\vec{a}$  nor  $\vec{b}$  have any  $z$  components. Consequently, we obtain  $[(3.0)(4.0) - (5.0)(2.0)]\hat{k} = 2.0\hat{k}$ .

(b)  $\vec{a} \cdot \vec{b} = a_x b_x + a_y b_y$  yields  $(3.0)(2.0) + (5.0)(4.0) = 26$ .

(c)  $\vec{a} + \vec{b} = (3.0 + 2.0)\hat{i} + (5.0 + 4.0)\hat{j} \Rightarrow (\vec{a} + \vec{b}) \cdot \vec{b} = (5.0)(2.0) + (9.0)(4.0) = 46$ .

(d) Several approaches are available. In this solution, we will construct a  $\hat{b}$  unit-vector and “dot” it (take the scalar product of it) with  $\vec{a}$ . In this case, we make the desired unit-vector by

$$\hat{b} = \frac{\vec{b}}{|\vec{b}|} = \frac{2.0\hat{i} + 4.0\hat{j}}{\sqrt{(2.0)^2 + (4.0)^2}}.$$

We therefore obtain

$$a_b = \vec{a} \cdot \hat{b} = \frac{(3.0)(2.0) + (5.0)(4.0)}{\sqrt{(2.0)^2 + (4.0)^2}} = 5.8.$$

37. Examining the figure, we see that  $\vec{a} + \vec{b} + \vec{c} = 0$ , where  $\vec{a} \perp \vec{b}$ .

(a)  $|\vec{a} \times \vec{b}| = (3.0)(4.0) = 12$  since the angle between them is  $90^\circ$ .

(b) Using the Right Hand Rule, the vector  $\vec{a} \times \vec{b}$  points in the  $\hat{i} \times \hat{j} = \hat{k}$ , or the  $+z$  direction.

(c)  $|\vec{a} \times \vec{c}| = |\vec{a} \times (-\vec{a} - \vec{b})| = |-(\vec{a} \times \vec{b})| = 12$ .

(d) The vector  $-\vec{a} \times \vec{b}$  points in the  $-\hat{i} \times \hat{j} = -\hat{k}$ , or the  $-z$  direction.

(e)  $|\vec{b} \times \vec{c}| = |\vec{b} \times (-\vec{a} - \vec{b})| = |-(\vec{b} \times \vec{a})| = |(\vec{a} \times \vec{b})| = 12$ .

(f) The vector points in the  $+z$  direction, as in part (a).

38. The displacement vectors can be written as (in meters)

$$\vec{d}_1 = (4.50 \text{ m})(\cos 63^\circ \hat{j} + \sin 63^\circ \hat{k}) = (2.04 \text{ m})\hat{j} + (4.01 \text{ m})\hat{k}$$

$$\vec{d}_2 = (1.40 \text{ m})(\cos 30^\circ \hat{i} + \sin 30^\circ \hat{k}) = (1.21 \text{ m})\hat{i} + (0.70 \text{ m})\hat{k}.$$

(a) The dot product of  $\vec{d}_1$  and  $\vec{d}_2$  is

$$\vec{d}_1 \cdot \vec{d}_2 = (2.04 \hat{j} + 4.01 \hat{k}) \cdot (1.21 \hat{i} + 0.70 \hat{k}) = (4.01 \hat{k}) \cdot (0.70 \hat{k}) = 2.81 \text{ m}^2.$$

(b) The cross product of  $\vec{d}_1$  and  $\vec{d}_2$  is

$$\begin{aligned} \vec{d}_1 \times \vec{d}_2 &= (2.04 \hat{j} + 4.01 \hat{k}) \times (1.21 \hat{i} + 0.70 \hat{k}) \\ &= (2.04)(1.21)(-\hat{k}) + (2.04)(0.70)\hat{i} + (4.01)(1.21)\hat{j} \\ &= (1.43 \hat{i} + 4.86 \hat{j} - 2.48 \hat{k}) \text{ m}^2. \end{aligned}$$

(c) The magnitudes of  $\vec{d}_1$  and  $\vec{d}_2$  are

$$\begin{aligned} d_1 &= \sqrt{(2.04 \text{ m})^2 + (4.01 \text{ m})^2} = 4.50 \text{ m} \\ d_2 &= \sqrt{(1.21 \text{ m})^2 + (0.70 \text{ m})^2} = 1.40 \text{ m}. \end{aligned}$$

Thus, the angle between the two vectors is

$$\theta = \cos^{-1} \left( \frac{\vec{d}_1 \cdot \vec{d}_2}{d_1 d_2} \right) = \cos^{-1} \left( \frac{2.81 \text{ m}^2}{(4.50 \text{ m})(1.40 \text{ m})} \right) = 63.5^\circ.$$

39. Since  $ab \cos \phi = a_x b_x + a_y b_y + a_z b_z$ ,

$$\cos \phi = \frac{a_x b_x + a_y b_y + a_z b_z}{ab}.$$

The magnitudes of the vectors given in the problem are

$$a = |\vec{a}| = \sqrt{(3.00)^2 + (3.00)^2 + (3.00)^2} = 5.20$$

$$b = |\vec{b}| = \sqrt{(2.00)^2 + (1.00)^2 + (3.00)^2} = 3.74.$$

The angle between them is found from

$$\cos \phi = \frac{(3.00)(2.00) + (3.00)(1.00) + (3.00)(3.00)}{(5.20)(3.74)} = 0.926.$$

The angle is  $\phi = 22^\circ$ .

40. Using the fact that

$$\hat{i} \times \hat{j} = \hat{k}, \quad \hat{j} \times \hat{k} = \hat{i}, \quad \hat{k} \times \hat{i} = \hat{j}$$

we obtain

$$2\vec{A} \times \vec{B} = 2(2.00\hat{i} + 3.00\hat{j} - 4.00\hat{k}) \times (-3.00\hat{i} + 4.00\hat{j} + 2.00\hat{k}) = 44.0\hat{i} + 16.0\hat{j} + 34.0\hat{k}.$$

Next, making use of

$$\begin{aligned} \hat{i} \cdot \hat{i} &= \hat{j} \cdot \hat{j} = \hat{k} \cdot \hat{k} = 1 \\ \hat{i} \cdot \hat{j} &= \hat{j} \cdot \hat{k} = \hat{k} \cdot \hat{i} = 0 \end{aligned}$$

we have

$$\begin{aligned} 3\vec{C} \cdot (2\vec{A} \times \vec{B}) &= 3(7.00\hat{i} - 8.00\hat{j}) \cdot (44.0\hat{i} + 16.0\hat{j} + 34.0\hat{k}) \\ &= 3[(7.00)(44.0) + (-8.00)(16.0) + (0)(34.0)] = 540. \end{aligned}$$

41. From the definition of the dot product between  $\vec{A}$  and  $\vec{B}$ ,  $\vec{A} \cdot \vec{B} = AB \cos \theta$ , we have

$$\cos \theta = \frac{\vec{A} \cdot \vec{B}}{AB}$$

With  $A = 6.00$ ,  $B = 7.00$  and  $\vec{A} \cdot \vec{B} = 14.0$ ,  $\cos \theta = 0.333$ , or  $\theta = 70.5^\circ$ .

42. Applying Eq. 3-23,  $\vec{F} = q\vec{v} \times \vec{B}$  (where  $q$  is a scalar) becomes

$$F_x \hat{i} + F_y \hat{j} + F_z \hat{k} = q(v_y B_z - v_z B_y) \hat{i} + q(v_z B_x - v_x B_z) \hat{j} + q(v_x B_y - v_y B_x) \hat{k}$$

which — plugging in values — leads to three equalities:

$$4.0 = 2(4.0B_z - 6.0B_y)$$

$$-20 = 2(6.0B_x - 2.0B_z)$$

$$12 = 2(2.0B_y - 4.0B_x)$$

Since we are told that  $B_x = B_y$ , the third equation leads to  $B_y = -3.0$ . Inserting this value into the first equation, we find  $B_z = -4.0$ . Thus, our answer is

$$\vec{B} = -3.0 \hat{i} - 3.0 \hat{j} - 4.0 \hat{k}.$$



43. From the figure, we note that  $\vec{c} \perp \vec{b}$ , which implies that the angle between  $\vec{c}$  and the  $+x$  axis is  $120^\circ$ . Direct application of Eq. 3-5 yields the answers for this and the next few parts.

(a)  $a_x = a \cos 0^\circ = a = 3.00 \text{ m}$ .

(b)  $a_y = a \sin 0^\circ = 0$ .

(c)  $b_x = b \cos 30^\circ = (4.00 \text{ m}) \cos 30^\circ = 3.46 \text{ m}$ .

(d)  $b_y = b \sin 30^\circ = (4.00 \text{ m}) \sin 30^\circ = 2.00 \text{ m}$ .

(e)  $c_x = c \cos 120^\circ = (10.0 \text{ m}) \cos 120^\circ = -5.00 \text{ m}$ .

(f)  $c_y = c \sin 30^\circ = (10.0 \text{ m}) \sin 120^\circ = 8.66 \text{ m}$ .

(g) In terms of components (first  $x$  and then  $y$ ), we must have

$$-5.00 \text{ m} = p (3.00 \text{ m}) + q (3.46 \text{ m})$$

$$8.66 \text{ m} = p (0) + q (2.00 \text{ m}).$$

Solving these equations, we find  $p = -6.67$ .

(h) Similarly,  $q = 4.33$  (note that it's easiest to solve for  $q$  first). The numbers  $p$  and  $q$  have no units.

44. The two vectors are written as, in unit of meters,

$$\vec{d}_1 = 4.0\hat{i} + 5.0\hat{j} = d_{1x}\hat{i} + d_{1y}\hat{j}, \quad \vec{d}_2 = -3.0\hat{i} + 4.0\hat{j} = d_{2x}\hat{i} + d_{2y}\hat{j}$$

(a) The vector (cross) product gives

$$\vec{d}_1 \times \vec{d}_2 = (d_{1x}d_{2y} - d_{1y}d_{2x})\hat{k} = [(4.0)(4.0) - (5.0)(-3.0)]\hat{k} = 31\hat{k}$$

(b) The scalar (dot) product gives

$$\vec{d}_1 \cdot \vec{d}_2 = d_{1x}d_{2x} + d_{1y}d_{2y} = (4.0)(-3.0) + (5.0)(4.0) = 8.0.$$

(c)

$$(\vec{d}_1 + \vec{d}_2) \cdot \vec{d}_2 = \vec{d}_1 \cdot \vec{d}_2 + d_2^2 = 8.0 + (-3.0)^2 + (4.0)^2 = 33.$$

(d) Note that the magnitude of the  $d_1$  vector is  $\sqrt{16+25} = 6.4$ . Now, the dot product is  $(6.4)(5.0)\cos\theta = 8$ . Dividing both sides by 32 and taking the inverse cosine yields  $\theta = 75.5^\circ$ . Therefore the component of the  $d_1$  vector along the direction of the  $d_2$  vector is  $6.4\cos\theta \approx 1.6$ .

45. Although we think of this as a three-dimensional movement, it is rendered effectively two-dimensional by referring measurements to its well-defined plane of the fault.

(a) The magnitude of the net displacement is

$$|\vec{AB}| = \sqrt{|\vec{AD}|^2 + |\vec{AC}|^2} = \sqrt{(17.0 \text{ m})^2 + (22.0 \text{ m})^2} = 27.8 \text{ m}.$$

(b) The magnitude of the vertical component of  $\vec{AB}$  is  $|\vec{AD}| \sin 52.0^\circ = 13.4 \text{ m}.$

46. Where the length unit is not displayed, the unit meter is understood.

(a) We first note that  $a = |\vec{a}| = \sqrt{(3.2)^2 + (1.6)^2} = 3.58$  and  $b = |\vec{b}| = \sqrt{(0.50)^2 + (4.5)^2} = 4.53$ .  
Now,

$$\begin{aligned}\vec{a} \cdot \vec{b} &= a_x b_x + a_y b_y = ab \cos \phi \\ (3.2)(0.50) + (1.6)(4.5) &= (3.58)(4.53) \cos \phi\end{aligned}$$

which leads to  $\phi = 57^\circ$  (the inverse cosine is double-valued as is the inverse tangent, but we know this is the right solution since both vectors are in the same quadrant).

(b) Since the angle (measured from  $+x$ ) for  $\vec{a}$  is  $\tan^{-1}(1.6/3.2) = 26.6^\circ$ , we know the angle for  $\vec{c}$  is  $26.6^\circ - 90^\circ = -63.4^\circ$  (the other possibility,  $26.6^\circ + 90^\circ$  would lead to a  $c_x < 0$ ). Therefore,

$$c_x = c \cos(-63.4^\circ) = (5.0)(0.45) = 2.2 \text{ m.}$$

(c) Also,  $c_y = c \sin(-63.4^\circ) = (5.0)(-0.89) = -4.5 \text{ m.}$

(d) And we know the angle for  $\vec{d}$  to be  $26.6^\circ + 90^\circ = 116.6^\circ$ , which leads to

$$d_x = d \cos(116.6^\circ) = (5.0)(-0.45) = -2.2 \text{ m.}$$

(e) Finally,  $d_y = d \sin 116.6^\circ = (5.0)(0.89) = 4.5 \text{ m.}$

47. We apply Eq. 3-20 and Eq. 3-27.


(a) The scalar (dot) product of the two vectors is

$$\vec{a} \cdot \vec{b} = ab \cos \phi = (10)(6.0) \cos 60^\circ = 30.$$

(b) The magnitude of the vector (cross) product of the two vectors is

$$|\vec{a} \times \vec{b}| = ab \sin \phi = (10)(6.0) \sin 60^\circ = 52.$$

48. The vectors are shown on the diagram. The  $x$  axis runs from west to east and the  $y$  axis runs from south to north. Then  $a_x = 5.0$  m,  $a_y = 0$ ,  $b_x = -(4.0 \text{ m}) \sin 35^\circ = -2.29$  m, and  $b_y = (4.0 \text{ m}) \cos 35^\circ = 3.28$  m.

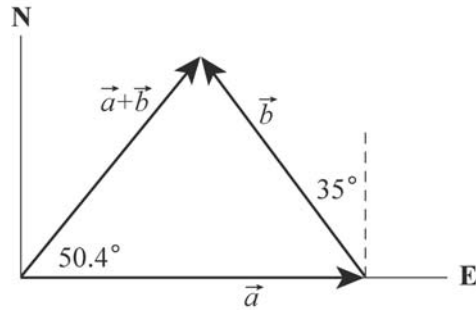

(a) Let  $\vec{c} = \vec{a} + \vec{b}$ . Then  $c_x = a_x + b_x = 5.00 \text{ m} - 2.29 \text{ m} = 2.71 \text{ m}$  and

$c_y = a_y + b_y = 0 + 3.28 \text{ m} = 3.28 \text{ m}$ . The magnitude of  $c$  is


$$c = \sqrt{c_x^2 + c_y^2} = \sqrt{(2.71 \text{ m})^2 + (3.28 \text{ m})^2} = 4.2 \text{ m}.$$

(b) The angle  $\theta$  that  $\vec{c} = \vec{a} + \vec{b}$  makes with the  $+x$  axis is

$$\theta = \tan^{-1} \left( \frac{c_y}{c_x} \right) = \tan^{-1} \left( \frac{3.28}{2.71} \right) = 50^\circ.$$

The second possibility ( $\theta = 50.4^\circ + 180^\circ = 230.4^\circ$ ) is rejected because it would point in a direction opposite to  $\vec{c}$ .

(c) The vector  $\vec{b} - \vec{a}$  is found by adding  $-\vec{a}$  to  $\vec{b}$ . The result is shown on the diagram to the right. Let  $\vec{c} = \vec{b} - \vec{a}$ . The components are  $c_x = b_x - a_x = -2.29 \text{ m} - 5.00 \text{ m} = -7.29 \text{ m}$ , and  $c_y = b_y - a_y = 3.28 \text{ m}$ . The magnitude of  $\vec{c}$  is  $c = \sqrt{c_x^2 + c_y^2} = 8.0 \text{ m}$ .

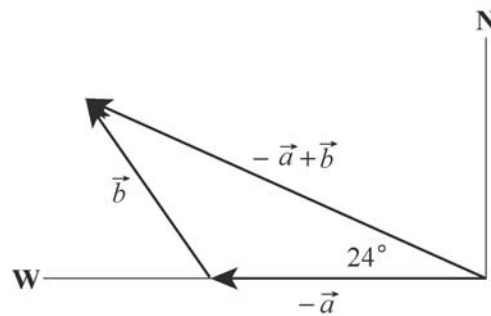

(d) The tangent of the angle  $\theta$  that  $\vec{c}$  makes with the  $+x$  axis (east) is

$$\tan \theta = \frac{c_y}{c_x} = \frac{3.28 \text{ m}}{-7.29 \text{ m}} = -4.50.$$

There are two solutions:  $-24.2^\circ$  and  $155.8^\circ$ . As the diagram shows, the second solution is correct. The vector  $\vec{c} = -\vec{a} + \vec{b}$  is  $24^\circ$  north of west.

49. We choose  $+x$  east and  $+y$  north and measure all angles in the “standard” way (positive ones are counterclockwise from  $+x$ ). Thus, vector  $\vec{d}_1$  has magnitude  $d_1 = 4.00$  m (with the unit meter) and direction  $\theta_1 = 225^\circ$ . Also,  $\vec{d}_2$  has magnitude  $d_2 = 5.00$  m and direction  $\theta_2 = 0^\circ$ , and vector  $\vec{d}_3$  has magnitude  $d_3 = 6.00$  m and direction  $\theta_3 = 60^\circ$ .

(a) The  $x$ -component of  $\vec{d}_1$  is  $d_{1x} = d_1 \cos \theta_1 = -2.83$  m.

(b) The  $y$ -component of  $\vec{d}_1$  is  $d_{1y} = d_1 \sin \theta_1 = -2.83$  m.

(c) The  $x$ -component of  $\vec{d}_2$  is  $d_{2x} = d_2 \cos \theta_2 = 5.00$  m.

(d) The  $y$ -component of  $\vec{d}_2$  is  $d_{2y} = d_2 \sin \theta_2 = 0$ .

(e) The  $x$ -component of  $\vec{d}_3$  is  $d_{3x} = d_3 \cos \theta_3 = 3.00$  m.

(f) The  $y$ -component of  $\vec{d}_3$  is  $d_{3y} = d_3 \sin \theta_3 = 5.20$  m.

(g) The sum of  $x$ -components is

$$d_x = d_{1x} + d_{2x} + d_{3x} = -2.83 \text{ m} + 5.00 \text{ m} + 3.00 \text{ m} = 5.17 \text{ m}.$$

(h) The sum of  $y$ -components is

$$d_y = d_{1y} + d_{2y} + d_{3y} = -2.83 \text{ m} + 0 + 5.20 \text{ m} = 2.37 \text{ m}.$$

(i) The magnitude of the resultant displacement is

$$d = \sqrt{d_x^2 + d_y^2} = \sqrt{(5.17 \text{ m})^2 + (2.37 \text{ m})^2} = 5.69 \text{ m}.$$

(j) And its angle is  $\theta = \tan^{-1} (2.37/5.17) = 24.6^\circ$  which (recalling our coordinate choices) means it points at about  $25^\circ$  north of east.

(k) and (l) This new displacement (the direct line home) when vectorially added to the previous (net) displacement must give zero. Thus, the new displacement is the negative, or opposite, of the previous (net) displacement. That is, it has the same magnitude (5.69 m) but points in the opposite direction ( $25^\circ$  south of west).

50. From the figure, it is clear that  $\vec{a} + \vec{b} + \vec{c} = 0$ , where  $\vec{a} \perp \vec{b}$ .

(a)  $\vec{a} \cdot \vec{b} = 0$  since the angle between them is  $90^\circ$ .

(b)  $\vec{a} \cdot \vec{c} = \vec{a} \cdot (-\vec{a} - \vec{b}) = -|\vec{a}|^2 = -16$ .

(c) Similarly,  $\vec{b} \cdot \vec{c} = -9.0$ .



51. Let  $\vec{A}$  represent the first part of his actual voyage (50.0 km east) and  $\vec{C}$  represent the intended voyage (90.0 km north). We are looking for a vector  $\vec{B}$  such that  $\vec{A} + \vec{B} = \vec{C}$ .

(a) The Pythagorean theorem yields  $B = \sqrt{(50.0 \text{ km})^2 + (90.0 \text{ km})^2} = 103 \text{ km}$ .

(b) The direction is  $\tan^{-1}(50.0 \text{ km}/90.0 \text{ km}) = 29.1^\circ$  west of north (which is equivalent to  $60.9^\circ$  north of due west).

52. If we wish to use Eq. 3-5 directly, we should note that the angles for  $\vec{Q}$ ,  $\vec{R}$  and  $\vec{S}$  are  $100^\circ$ ,  $250^\circ$  and  $310^\circ$ , respectively, if they are measured counterclockwise from the  $+x$  axis.

(a) Using unit-vector notation, with the unit meter understood, we have

$$\vec{P} = 10.0 \cos(25.0^\circ) \hat{i} + 10.0 \sin(25.0^\circ) \hat{j}$$

$$\vec{Q} = 12.0 \cos(100^\circ) \hat{i} + 12.0 \sin(100^\circ) \hat{j}$$

$$\vec{R} = 8.00 \cos(250^\circ) \hat{i} + 8.00 \sin(250^\circ) \hat{j}$$

$$\vec{S} = 9.00 \cos(310^\circ) \hat{i} + 9.00 \sin(310^\circ) \hat{j}$$

$$\vec{P} + \vec{Q} + \vec{R} + \vec{S} = (10.0 \text{ m}) \hat{i} + (1.63 \text{ m}) \hat{j}$$

(b) The magnitude of the vector sum is  $\sqrt{(10.0 \text{ m})^2 + (1.63 \text{ m})^2} = 10.2 \text{ m}$ .

(c) The angle is  $\tan^{-1} (1.63 \text{ m}/10.0 \text{ m}) \approx 9.24^\circ$  measured counterclockwise from the  $+x$  axis.

53. Noting that the given  $130^\circ$  is measured counterclockwise from the  $+x$  axis, the two vectors can be written as

$$\vec{A} = 8.00(\cos 130^\circ \hat{i} + \sin 130^\circ \hat{j}) = -5.14 \hat{i} + 6.13 \hat{j}$$

$$\vec{B} = B_x \hat{i} + B_y \hat{j} = -7.72 \hat{i} - 9.20 \hat{j}.$$

(a) The angle between the negative direction of the  $y$  axis ( $-\hat{j}$ ) and the direction of  $\vec{A}$  is

$$\theta = \cos^{-1} \left( \frac{\vec{A} \cdot (-\hat{j})}{A} \right) = \cos^{-1} \left( \frac{-6.13}{\sqrt{(-5.14)^2 + (6.13)^2}} \right) = \cos^{-1} \left( \frac{-6.13}{8.00} \right) = 140^\circ.$$

Alternatively, one may say that the  $-y$  direction corresponds to an angle of  $270^\circ$ , and the answer is simply given by  $270^\circ - 130^\circ = 140^\circ$ .

(b) Since the  $y$  axis is in the  $xy$  plane, and  $\vec{A} \times \vec{B}$  is perpendicular to that plane, then the answer is  $90.0^\circ$ .

(c) The vector can be simplified as

$$\vec{A} \times (\vec{B} + 3.00 \hat{k}) = (-5.14 \hat{i} + 6.13 \hat{j}) \times (-7.72 \hat{i} - 9.20 \hat{j} + 3.00 \hat{k})$$

$$= 18.39 \hat{i} + 15.42 \hat{j} + 94.61 \hat{k}$$

Its magnitude is  $|\vec{A} \times (\vec{B} + 3.00 \hat{k})| = 97.6$ . The angle between the negative direction of the  $y$  axis ( $-\hat{j}$ ) and the direction of the above vector is

$$\theta = \cos^{-1} \left( \frac{-15.42}{97.6} \right) = 99.1^\circ.$$

54. The three vectors are

$$\begin{aligned}\vec{d}_1 &= 4.0\hat{i} + 5.0\hat{j} - 6.0\hat{k} \\ \vec{d}_2 &= -1.0\hat{i} + 2.0\hat{j} + 3.0\hat{k} \\ \vec{d}_3 &= 4.0\hat{i} + 3.0\hat{j} + 2.0\hat{k}\end{aligned}$$

(a)  $\vec{r} = \vec{d}_1 - \vec{d}_2 + \vec{d}_3 = (9.0 \text{ m})\hat{i} + (6.0 \text{ m})\hat{j} + (-7.0 \text{ m})\hat{k}.$

(b) The magnitude of  $\vec{r}$  is  $|\vec{r}| = \sqrt{(9.0 \text{ m})^2 + (6.0 \text{ m})^2 + (-7.0 \text{ m})^2} = 12.9 \text{ m}.$  The angle between  $\vec{r}$  and the z-axis is given by

$$\cos \theta = \frac{\vec{r} \cdot \hat{k}}{|\vec{r}|} = \frac{-7.0 \text{ m}}{12.9 \text{ m}} = -0.543$$

which implies  $\theta = 123^\circ.$

(c) The component of  $\vec{d}_1$  along the direction of  $\vec{d}_2$  is given by  $d_{\parallel} = \vec{d}_1 \cdot \hat{u} = d_1 \cos \phi$  where  $\phi$  is the angle between  $\vec{d}_1$  and  $\vec{d}_2$ , and  $\hat{u}$  is the unit vector in the direction of  $\vec{d}_2$ . Using the properties of the scalar (dot) product, we have

$$d_{\parallel} = d_1 \left( \frac{\vec{d}_1 \cdot \vec{d}_2}{d_1 d_2} \right) = \frac{\vec{d}_1 \cdot \vec{d}_2}{d_2} = \frac{(4.0)(-1.0) + (5.0)(2.0) + (-6.0)(3.0)}{\sqrt{(-1.0)^2 + (2.0)^2 + (3.0)^2}} = \frac{-12}{\sqrt{14}} = -3.2 \text{ m}.$$

(d) Now we are looking for  $d_{\perp}$  such that  $d_1^2 = (4.0)^2 + (5.0)^2 + (-6.0)^2 = 77 = d_{\parallel}^2 + d_{\perp}^2$ . From (c), we have

$$d_{\perp} = \sqrt{77 \text{ m}^2 - (-3.2 \text{ m})^2} = 8.2 \text{ m}.$$

This gives the magnitude of the perpendicular component (and is consistent with what one would get using Eq. 3-27), but if more information (such as the direction, or a full specification in terms of unit vectors) is sought then more computation is needed.

55. The two vectors are given by

$$\vec{A} = 8.00(\cos 130^\circ \hat{i} + \sin 130^\circ \hat{j}) = -5.14 \hat{i} + 6.13 \hat{j}$$

$$\vec{B} = B_x \hat{i} + B_y \hat{j} = -7.72 \hat{i} - 9.20 \hat{j}.$$

(a) The dot product of  $5\vec{A} \cdot \vec{B}$  is

$$5\vec{A} \cdot \vec{B} = 5(-5.14 \hat{i} + 6.13 \hat{j}) \cdot (-7.72 \hat{i} - 9.20 \hat{j}) = 5[(-5.14)(-7.72) + (6.13)(-9.20)]$$

$$= -83.4.$$

(b) In unit vector notation

$$4\vec{A} \times 3\vec{B} = 12\vec{A} \times \vec{B} = 12(-5.14 \hat{i} + 6.13 \hat{j}) \times (-7.72 \hat{i} - 9.20 \hat{j}) = 12(94.6 \hat{k}) = 1.14 \times 10^3 \hat{k}$$

(c) We note that the azimuthal angle is undefined for a vector along the  $z$  axis. Thus, our result is “ $1.14 \times 10^3$ ,  $\theta$  not defined, and  $\phi = 0^\circ$ .”

(d) Since  $\vec{A}$  is in the  $xy$  plane, and  $\vec{A} \times \vec{B}$  is perpendicular to that plane, then the answer is  $90^\circ$ .

(e) Clearly,  $\vec{A} + 3.00 \hat{k} = -5.14 \hat{i} + 6.13 \hat{j} + 3.00 \hat{k}$ .

(f) The Pythagorean theorem yields magnitude  $A = \sqrt{(5.14)^2 + (6.13)^2 + (3.00)^2} = 8.54$ .

The azimuthal angle is  $\theta = 130^\circ$ , just as it was in the problem statement ( $\vec{A}$  is the projection onto to the  $xy$  plane of the new vector created in part (e)). The angle measured from the  $+z$  axis is  $\phi = \cos^{-1}(3.00/8.54) = 69.4^\circ$ .

56. The two vectors  $\vec{d}_1$  and  $\vec{d}_2$  are given by  $\vec{d}_1 = -d_1 \hat{j}$  and  $\vec{d}_2 = d_2 \hat{i}$ .

(a) The vector  $\vec{d}_2 / 4 = (d_2 / 4) \hat{i}$  points in the  $+x$  direction. The  $1/4$  factor does not affect the result.

(b) The vector  $\vec{d}_1 / (-4) = (d_1 / 4) \hat{j}$  points in the  $+y$  direction. The minus sign (with the “-4”) does affect the direction:  $-(-y) = +y$ .

(c)  $\vec{d}_1 \cdot \vec{d}_2 = 0$  since  $\hat{i} \cdot \hat{j} = 0$ . The two vectors are perpendicular to each other.

(d)  $\vec{d}_1 \cdot (\vec{d}_2 / 4) = (\vec{d}_1 \cdot \vec{d}_2) / 4 = 0$ , as in part (c).

(e)  $\vec{d}_1 \times \vec{d}_2 = -d_1 d_2 (\hat{j} \times \hat{i}) = d_1 d_2 \hat{k}$ , in the  $+z$ -direction.

(f)  $\vec{d}_2 \times \vec{d}_1 = -d_2 d_1 (\hat{i} \times \hat{j}) = -d_1 d_2 \hat{k}$ , in the  $-z$ -direction.

(g) The magnitude of the vector in (e) is  $d_1 d_2$ .

(h) The magnitude of the vector in (f) is  $d_1 d_2$ .

(i) Since  $d_1 \times (\vec{d}_2 / 4) = (d_1 d_2 / 4) \hat{k}$ , the magnitude is  $d_1 d_2 / 4$ .

(j) The direction of  $\vec{d}_1 \times (\vec{d}_2 / 4) = (d_1 d_2 / 4) \hat{k}$  is in the  $+z$ -direction.

57. The three vectors are

$$\vec{d}_1 = -3.0\hat{i} + 3.0\hat{j} + 2.0\hat{k}$$

$$\vec{d}_2 = -2.0\hat{i} - 4.0\hat{j} + 2.0\hat{k}$$

$$\vec{d}_3 = 2.0\hat{i} + 3.0\hat{j} + 1.0\hat{k}.$$

(a) Since  $\vec{d}_2 + \vec{d}_3 = 0\hat{i} - 1.0\hat{j} + 3.0\hat{k}$ , we have

$$\begin{aligned}\vec{d}_1 \cdot (\vec{d}_2 + \vec{d}_3) &= (-3.0\hat{i} + 3.0\hat{j} + 2.0\hat{k}) \cdot (0\hat{i} - 1.0\hat{j} + 3.0\hat{k}) \\ &= 0 - 3.0 + 6.0 = 3.0 \text{ m}^2.\end{aligned}$$

(b) Using Eq. 3-30, we obtain  $\vec{d}_2 \times \vec{d}_3 = -10\hat{i} + 6.0\hat{j} + 2.0\hat{k}$ . Thus,

$$\begin{aligned}\vec{d}_1 \cdot (\vec{d}_2 \times \vec{d}_3) &= (-3.0\hat{i} + 3.0\hat{j} + 2.0\hat{k}) \cdot (-10\hat{i} + 6.0\hat{j} + 2.0\hat{k}) \\ &= 30 + 18 + 4.0 = 52 \text{ m}^3.\end{aligned}$$

(c) We found  $\vec{d}_2 + \vec{d}_3$  in part (a). Use of Eq. 3-30 then leads to

$$\begin{aligned}\vec{d}_1 \times (\vec{d}_2 + \vec{d}_3) &= (-3.0\hat{i} + 3.0\hat{j} + 2.0\hat{k}) \times (0\hat{i} - 1.0\hat{j} + 3.0\hat{k}) \\ &= (11\hat{i} + 9.0\hat{j} + 3.0\hat{k}) \text{ m}^2\end{aligned}$$

58. We choose  $+x$  east and  $+y$  north and measure all angles in the “standard” way (positive ones counterclockwise from  $+x$ , negative ones clockwise). Thus, vector  $\vec{d}_1$  has magnitude  $d_1 = 3.66$  (with the unit meter and three significant figures assumed) and direction  $\theta_1 = 90^\circ$ . Also,  $\vec{d}_2$  has magnitude  $d_2 = 1.83$  and direction  $\theta_2 = -45^\circ$ , and vector  $\vec{d}_3$  has magnitude  $d_3 = 0.91$  and direction  $\theta_3 = -135^\circ$ . We add the  $x$  and  $y$  components, respectively:

$$x: d_1 \cos \theta_1 + d_2 \cos \theta_2 + d_3 \cos \theta_3 = 0.65 \text{ m}$$

$$y: d_1 \sin \theta_1 + d_2 \sin \theta_2 + d_3 \sin \theta_3 = 1.7 \text{ m.}$$

(a) The magnitude of the direct displacement (the vector sum  $\vec{d}_1 + \vec{d}_2 + \vec{d}_3$ ) is  $\sqrt{(0.65 \text{ m})^2 + (1.7 \text{ m})^2} = 1.8 \text{ m}$ .

(b) The angle (understood in the sense described above) is  $\tan^{-1} (1.7/0.65) = 69^\circ$ . That is, the first putt must aim in the direction  $69^\circ$  north of east.



59. The vectors can be written as  $\vec{a} = a\hat{i}$  and  $\vec{b} = b\hat{j}$  where  $a, b > 0$ .

(a) We are asked to consider

$$\frac{\vec{b}}{d} = \left(\frac{b}{d}\right)\hat{j}$$

in the case  $d > 0$ . Since the coefficient of  $\hat{j}$  is positive, then the vector points in the  $+y$  direction.

(b) If, however,  $d < 0$ , then the coefficient is negative and the vector points in the  $-y$  direction.

(c) Since  $\cos 90^\circ = 0$ , then  $\vec{a} \cdot \vec{b} = 0$ , using Eq. 3-20.

(d) Since  $\vec{b}/d$  is along the  $y$  axis, then (by the same reasoning as in the previous part)  $\vec{a} \cdot (\vec{b}/d) = 0$ .

(e) By the right-hand rule,  $\vec{a} \times \vec{b}$  points in the  $+z$ -direction.

(f) By the same rule,  $\vec{b} \times \vec{a}$  points in the  $-z$ -direction. We note that  $\vec{b} \times \vec{a} = -\vec{a} \times \vec{b}$  is true in this case and quite generally.

(g) Since  $\sin 90^\circ = 1$ , Eq. 3-27 gives  $|\vec{a} \times \vec{b}| = ab$  where  $a$  is the magnitude of  $\vec{a}$ .

(h) Also,  $|\vec{a} \times \vec{b}| = |\vec{b} \times \vec{a}| = ab$ .

(i) With  $d > 0$ , we find that  $\vec{a} \times (\vec{b}/d)$  has magnitude  $ab/d$ .

(j) The vector  $\vec{a} \times (\vec{b}/d)$  points in the  $+z$  direction.

60. The vector can be written as  $\vec{d} = (2.5 \text{ m})\hat{j}$ , where we have taken  $\hat{j}$  to be the unit vector pointing north.

(a) The magnitude of the vector  $\vec{a} = 4.0\vec{d}$  is  $(4.0)(2.5 \text{ m}) = 10 \text{ m}$ .

(b) The direction of the vector  $\vec{a} = 4.0\vec{d}$  is the same as the direction of  $\vec{d}$  (north).

(c) The magnitude of the vector  $\vec{c} = -3.0\vec{d}$  is  $(3.0)(2.5 \text{ m}) = 7.5 \text{ m}$ .

(d) The direction of the vector  $\vec{c} = -3.0\vec{d}$  is the opposite of the direction of  $\vec{d}$ . Thus, the direction of  $\vec{c}$  is south.

61. We note that the set of choices for unit vector directions has correct orientation (for a right-handed coordinate system). Students sometimes confuse “north” with “up”, so it might be necessary to emphasize that these are being treated as the mutually perpendicular directions of our real world, not just some “on the paper” or “on the blackboard” representation of it. Once the terminology is clear, these questions are basic to the definitions of the scalar (dot) and vector (cross) products.

(a)  $\hat{i} \cdot \hat{k} = 0$  since  $\hat{i} \perp \hat{k}$

(b)  $(-\hat{k}) \cdot (-\hat{j}) = 0$  since  $\hat{k} \perp \hat{j}$ .

(c)  $\hat{j} \cdot (-\hat{j}) = -1$ .

(d)  $\hat{k} \times \hat{j} = -\hat{i}$  (west).

(e)  $(-\hat{i}) \times (-\hat{j}) = +\hat{k}$  (upward).


(f)  $(-\hat{k}) \times (-\hat{j}) = -\hat{i}$  (west).

62. (a) The vectors should be parallel to achieve a resultant 7 m long (the unprimed case shown below),


(b) anti-parallel (in opposite directions) to achieve a resultant 1 m long (primed case shown),

(c) and perpendicular to achieve a resultant  $\sqrt{3^2 + 4^2} = 5$  m long (the double-primed case shown).

In each sketch, the vectors are shown in a “head-to-tail” sketch but the resultant is not shown. The resultant would be a straight line drawn from beginning to end; the beginning is indicated by  $A$  (with or without primes, as the case may be) and the end is indicated by  $B$ .

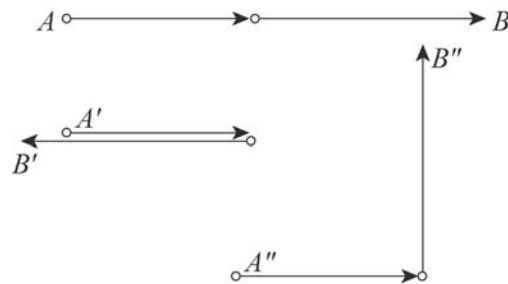

63. A sketch of the displacements is shown. The resultant (not shown) would be a straight line from start (Bank) to finish (Walpole). With a careful drawing, one should find that the resultant vector has length 29.5 km at  $35^\circ$  west of south.

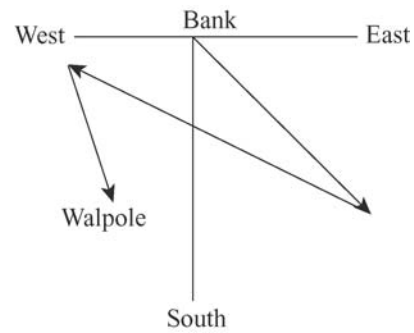

64. The point  $P$  is displaced vertically by  $2R$ , where  $R$  is the radius of the wheel. It is displaced horizontally by half the circumference of the wheel, or  $\pi R$ . Since  $R = 0.450$  m, the horizontal component of the displacement is 1.414 m and the vertical component of the displacement is 0.900 m. If the  $x$  axis is horizontal and the  $y$  axis is vertical, the vector displacement (in meters) is  $\vec{r} = (1.414 \hat{i} + 0.900 \hat{j})$ . The displacement has a magnitude of

$$|\vec{r}| = \sqrt{(\pi R)^2 + (2R)^2} = R\sqrt{\pi^2 + 4} = 1.68 \text{ m}$$

and an angle of

$$\tan^{-1}\left(\frac{2R}{\pi R}\right) = \tan^{-1}\left(\frac{2}{\pi}\right) = 32.5^\circ$$

above the floor. In physics there are no “exact” measurements, yet that angle computation seemed to yield something *exact*. However, there has to be some uncertainty in the observation that the wheel rolled half of a revolution, which introduces some indefiniteness in our result.

65. Reference to Figure 3-18 (and the accompanying material in that section) is helpful. If we convert  $\vec{B}$  to the magnitude-angle notation (as  $\vec{A}$  already is) we have  $\vec{B} = (14.4 \angle 33.7^\circ)$  (appropriate notation especially if we are using a vector capable calculator in polar mode). Where the length unit is not displayed in the solution, the unit meter should be understood. In the magnitude-angle notation, rotating the axis by  $+20^\circ$  amounts to subtracting that angle from the angles previously specified. Thus,  $\vec{A} = (12.0 \angle 40.0^\circ)'$  and  $\vec{B} = (14.4 \angle 13.7^\circ)'$ , where the 'prime' notation indicates that the description is in terms of the new coordinates. Converting these results to  $(x, y)$  representations, we obtain


(a)  $\vec{A} = (9.19 \text{ m}) \hat{i}' + (7.71 \text{ m}) \hat{j}'$ .

(b) Similarly,  $\vec{B} = (14.0 \text{ m}) \hat{i}' + (3.41 \text{ m}) \hat{j}'$ .

66. The diagram shows the displacement vectors for the two segments of her walk, labeled  $\vec{A}$  and  $\vec{B}$ , and the total (“final”) displacement vector, labeled  $\vec{r}$ . We take east to be the  $+x$  direction and north to be the  $+y$  direction. We observe that the angle between  $\vec{A}$  and the  $x$  axis is  $60^\circ$ . Where the units are not explicitly shown, the distances are understood to be in meters. Thus, the components of  $\vec{A}$  are  $A_x = 250 \cos 60^\circ = 125$  and  $A_y = 250 \sin 60^\circ = 216.5$ . The components of  $\vec{B}$  are  $B_x = 175$  and  $B_y = 0$ . The components of the total displacement are

$$r_x = A_x + B_x = 125 + 175 = 300$$

$$r_y = A_y + B_y = 216.5 + 0 = 216.5.$$

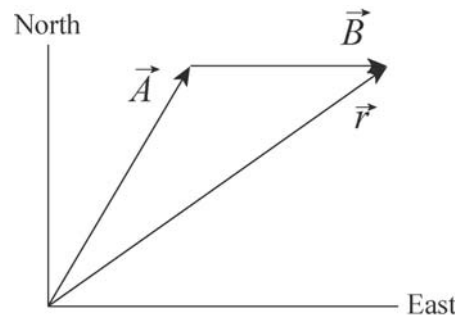

(a) The magnitude of the resultant displacement is

$$|\vec{r}| = \sqrt{r_x^2 + r_y^2} = \sqrt{(300 \text{ m})^2 + (216.5 \text{ m})^2} = 370 \text{ m}.$$

(b) The angle the resultant displacement makes with the  $+x$  axis is

$$\tan^{-1}\left(\frac{r_y}{r_x}\right) = \tan^{-1}\left(\frac{216.5 \text{ m}}{300 \text{ m}}\right) = 36^\circ.$$

The direction is  $36^\circ$  north of due east.

(c) The total *distance* walked is  $d = 250 \text{ m} + 175 \text{ m} = 425 \text{ m}$ .

(d) The total distance walked is greater than the magnitude of the resultant displacement. The diagram shows why:  $\vec{A}$  and  $\vec{B}$  are not collinear.



67. The three vectors given are

$$\begin{aligned}\vec{a} &= 5.0 \hat{i} + 4.0 \hat{j} - 6.0 \hat{k} \\ \vec{b} &= -2.0 \hat{i} + 2.0 \hat{j} + 3.0 \hat{k} \\ \vec{c} &= 4.0 \hat{i} + 3.0 \hat{j} + 2.0 \hat{k}\end{aligned}$$

(a) The vector equation  $\vec{r} = \vec{a} - \vec{b} + \vec{c}$  is

$$\begin{aligned}\vec{r} &= [5.0 - (-2.0) + 4.0]\hat{i} + (4.0 - 2.0 + 3.0)\hat{j} + (-6.0 - 3.0 + 2.0)\hat{k} \\ &= 11\hat{i} + 5.0\hat{j} - 7.0\hat{k}.\end{aligned}$$

(b) We find the angle from  $+z$  by “dotting” (taking the scalar product)  $\vec{r}$  with  $\hat{k}$ . Noting that  $r = |\vec{r}| = \sqrt{(11.0)^2 + (5.0)^2 + (-7.0)^2} = 14$ , Eq. 3-20 with Eq. 3-23 leads to

$$\vec{r} \cdot \hat{k} = -7.0 = (14)(1)\cos\phi \Rightarrow \phi = 120^\circ.$$

(c) To find the component of a vector in a certain direction, it is efficient to “dot” it (take the scalar product of it) with a unit-vector in that direction. In this case, we make the desired unit-vector by

$$\hat{b} = \frac{\vec{b}}{|\vec{b}|} = \frac{-2.0\hat{i} + 2.0\hat{j} + 3.0\hat{k}}{\sqrt{(-2.0)^2 + (2.0)^2 + (3.0)^2}}.$$

We therefore obtain

$$a_b = \vec{a} \cdot \hat{b} = \frac{(5.0)(-2.0) + (4.0)(2.0) + (-6.0)(3.0)}{\sqrt{(-2.0)^2 + (2.0)^2 + (3.0)^2}} = -4.9.$$

(d) One approach (if all we require is the magnitude) is to use the vector cross product, as the problem suggests; another (which supplies more information) is to subtract the result in part (c) (multiplied by  $\hat{b}$ ) from  $\vec{a}$ . We briefly illustrate both methods. We note that if  $a \cos \theta$  (where  $\theta$  is the angle between  $\vec{a}$  and  $\vec{b}$ ) gives  $a_b$  (the component along  $\hat{b}$ ) then we expect  $a \sin \theta$  to yield the orthogonal component:

$$a \sin \theta = \frac{|\vec{a} \times \vec{b}|}{b} = 7.3$$

(alternatively, one might compute  $\theta$  from part (c) and proceed more directly). The second method proceeds as follows:

$$\begin{aligned}\vec{a} - a_b \hat{b} &= (5.0 - 2.35)\hat{i} + (4.0 - (-2.35))\hat{j} + ((-6.0) - (-3.53))\hat{k} \\ &= 2.65\hat{i} + 6.35\hat{j} - 2.47\hat{k}\end{aligned}$$

This describes the perpendicular part of  $\vec{a}$  completely. To find the magnitude of this part, we compute

$$\sqrt{(2.65)^2 + (6.35)^2 + (-2.47)^2} = 7.3$$

which agrees with the first method.

68. The two vectors can be found by solving the simultaneous equations.

(a) If we add the equations, we obtain  $2\vec{a} = 6\vec{c}$ , which leads to  $\vec{a} = 3\vec{c} = 9\hat{i} + 12\hat{j}$ .

(b) Plugging this result back in, we find  $\vec{b} = \vec{c} = 3\hat{i} + 4\hat{j}$ .

69. (a) This is one example of an answer:  $(-40 \hat{i} - 20 \hat{j} + 25 \hat{k})$  m, with  $\hat{i}$  directed anti-parallel to the first path,  $\hat{j}$  directed anti-parallel to the second path and  $\hat{k}$  directed upward (in order to have a right-handed coordinate system). Other examples are  $(40 \hat{i} + 20 \hat{j} + 25 \hat{k})$  m and  $(40 \hat{i} - 20 \hat{j} - 25 \hat{k})$  m (with slightly different interpretations for the unit vectors). Note that the product of the components is positive in each example.

(b) Using Pythagorean theorem, we have  $\sqrt{(40 \text{ m})^2 + (20 \text{ m})^2} = 44.7 \text{ m} \approx 45 \text{ m}$ .

70. The vector  $\vec{d}$  (measured in meters) can be represented as  $\vec{d} = (3.0 \text{ m})(-\hat{j})$ , where  $-\hat{j}$  is the unit vector pointing south. Therefore,

$$5.0\vec{d} = 5.0(-3.0 \text{ m } \hat{j}) = (-15 \text{ m})\hat{j}.$$

(a) The positive scalar factor (5.0) affects the magnitude but not the direction. The magnitude of  $5.0\vec{d}$  is 15 m.

(b) The new direction of  $5\vec{d}$  is the same as the old: south.

The vector  $-2.0\vec{d}$  can be written as  $-2.0\vec{d} = (6.0 \text{ m})\hat{j}$ .

(c) The absolute value of the scalar factor ( $|-2.0| = 2.0$ ) affects the magnitude. The new magnitude is 6.0 m.

(d) The minus sign carried by this scalar factor reverses the direction, so the new direction is  $+\hat{j}$ , or north.

71. Given:  $\vec{A} + \vec{B} = 6.0 \hat{i} + 1.0 \hat{j}$  and  $\vec{A} - \vec{B} = -4.0 \hat{i} + 7.0 \hat{j}$ . Solving these simultaneously leads to  $\vec{A} = 1.0 \hat{i} + 4.0 \hat{j}$ . The Pythagorean theorem then leads to  $A = \sqrt{(1.0)^2 + (4.0)^2} = 4.1$ .

72. The ant's trip consists of three displacements:

$$\vec{d}_1 = (0.40 \text{ m})(\cos 225^\circ \hat{i} + \sin 225^\circ \hat{j}) = (-0.28 \text{ m})\hat{i} + (-0.28 \text{ m})\hat{j}$$

$$\vec{d}_2 = (0.50 \text{ m})\hat{i}$$

$$\vec{d}_3 = (0.60 \text{ m})(\cos 60^\circ \hat{i} + \sin 60^\circ \hat{j}) = (0.30 \text{ m})\hat{i} + (0.52 \text{ m})\hat{j},$$

where the angle is measured with respect to the positive  $x$  axis. We have taken the positive  $x$  and  $y$  directions to correspond to east and north, respectively.

(a) The  $x$  component of  $\vec{d}_1$  is  $d_{1x} = (0.40 \text{ m})\cos 225^\circ = -0.28 \text{ m}$ .

(b) The  $y$  component of  $\vec{d}_1$  is  $d_{1y} = (0.40 \text{ m})\sin 225^\circ = -0.28 \text{ m}$ .

(c) The  $x$  component of  $\vec{d}_2$  is  $d_{2x} = 0.50 \text{ m}$ .

(d) The  $y$  component of  $\vec{d}_2$  is  $d_{2y} = 0 \text{ m}$ .

(e) The  $x$  component of  $\vec{d}_3$  is  $d_{3x} = (0.60 \text{ m})\cos 60^\circ = 0.30 \text{ m}$ .

(f) The  $y$  component of  $\vec{d}_3$  is  $d_{3y} = (0.60 \text{ m})\sin 60^\circ = 0.52 \text{ m}$ .

(g) The  $x$  component of the net displacement  $\vec{d}_{net}$  is

$$d_{net,x} = d_{1x} + d_{2x} + d_{3x} = (-0.28 \text{ m}) + (0.50 \text{ m}) + (0.30 \text{ m}) = 0.52 \text{ m}.$$

(h) The  $y$  component of the net displacement  $\vec{d}_{net}$  is

$$d_{net,y} = d_{1y} + d_{2y} + d_{3y} = (-0.28 \text{ m}) + (0 \text{ m}) + (0.52 \text{ m}) = 0.24 \text{ m}.$$

(i) The magnitude of the net displacement is

$$d_{net} = \sqrt{d_{net,x}^2 + d_{net,y}^2} = \sqrt{(0.52 \text{ m})^2 + (0.24 \text{ m})^2} = 0.57 \text{ m}.$$

(j) The direction of the net displacement is

$$\theta = \tan^{-1}\left(\frac{d_{net,y}}{d_{net,x}}\right) = \tan^{-1}\left(\frac{0.24 \text{ m}}{0.52 \text{ m}}\right) = 25^\circ \text{ (north of east)}$$

If the ant has to return directly to the starting point, the displacement would be  $-\vec{d}_{net}$ .

(k) The distance the ant has to travel is  $|\vec{d}_{net}| = 0.57 \text{ m}$ .

(l) The direction the ant has to travel is  $25^\circ$  (south of west).

1. The initial position vector  $\vec{r}_0$  satisfies  $\vec{r} - \vec{r}_0 = \Delta\vec{r}$ , which results in

$$\vec{r}_0 = \vec{r} - \Delta\vec{r} = (3.0\hat{j} - 4.0\hat{k})\text{m} - (2.0\hat{i} - 3.0\hat{j} + 6.0\hat{k})\text{m} = (-2.0\text{ m})\hat{i} + (6.0\text{ m})\hat{j} + (-10\text{ m})\hat{k}.$$



2. (a) The position vector, according to Eq. 4-1, is  $\vec{r} = (-5.0 \text{ m})\hat{i} + (8.0 \text{ m})\hat{j}$ .


(b) The magnitude is  $|\vec{r}| = \sqrt{x^2 + y^2 + z^2} = \sqrt{(-5.0 \text{ m})^2 + (8.0 \text{ m})^2 + (0 \text{ m})^2} = 9.4 \text{ m}$ .

(c) Many calculators have polar  $\leftrightarrow$  rectangular conversion capabilities which make this computation more efficient than what is shown below. Noting that the vector lies in the  $xy$  plane and using Eq. 3-6, we obtain:

$$\theta = \tan^{-1}\left(\frac{8.0 \text{ m}}{-5.0 \text{ m}}\right) = -58^\circ \text{ or } 122^\circ$$

where the latter possibility ( $122^\circ$  measured counterclockwise from the  $+x$  direction) is chosen since the signs of the components imply the vector is in the second quadrant.

(d) The sketch is shown on the right. The vector is  $122^\circ$  counterclockwise from the  $+x$  direction.




(e) The displacement is  $\Delta\vec{r} = \vec{r}' - \vec{r}$  where  $\vec{r}$  is given in part (a) and  $\vec{r}' = (3.0 \text{ m})\hat{i}$ . Therefore,  $\Delta\vec{r} = (8.0 \text{ m})\hat{i} - (8.0 \text{ m})\hat{j}$ .

(f) The magnitude of the displacement is  $|\Delta\vec{r}| = \sqrt{(8.0 \text{ m})^2 + (-8.0 \text{ m})^2} = 11 \text{ m}$ .

(g) The angle for the displacement, using Eq. 3-6, is

$$\tan^{-1}\left(\frac{8.0 \text{ m}}{-8.0 \text{ m}}\right) = -45^\circ \text{ or } 135^\circ$$


where we choose the former possibility ( $-45^\circ$ , or  $45^\circ$  measured *clockwise* from  $+x$ ) since the signs of the components imply the vector is in the fourth quadrant. A sketch of  $\Delta\vec{r}$  is shown on the right.



3. (a) The magnitude of  $\vec{r}$  is

$$|\vec{r}| = \sqrt{(5.0 \text{ m})^2 + (-3.0 \text{ m})^2 + (2.0 \text{ m})^2} = 6.2 \text{ m}.$$

(b) A sketch is shown. The coordinate values are in meters.

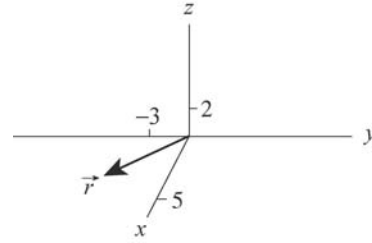

4. We choose a coordinate system with origin at the clock center and  $+x$  rightward (towards the “3:00” position) and  $+y$  upward (towards “12:00”).

(a) In unit-vector notation, we have  $\vec{r}_1 = (10 \text{ cm})\hat{i}$  and  $\vec{r}_2 = (-10 \text{ cm})\hat{j}$ . Thus, Eq. 4-2 gives

$$\Delta\vec{r} = \vec{r}_2 - \vec{r}_1 = (-10 \text{ cm})\hat{i} + (-10 \text{ cm})\hat{j}.$$

and the magnitude is given by  $|\Delta\vec{r}| = \sqrt{(-10 \text{ cm})^2 + (-10 \text{ cm})^2} = 14 \text{ cm}$ .

(b) Using Eq. 3-6, the angle is

$$\theta = \tan^{-1}\left(\frac{-10 \text{ cm}}{-10 \text{ cm}}\right) = 45^\circ \text{ or } -135^\circ.$$

We choose  $-135^\circ$  since the desired angle is in the third quadrant. In terms of the magnitude-angle notation, one may write

$$\Delta\vec{r} = \vec{r}_2 - \vec{r}_1 = (-10 \text{ cm})\hat{i} + (-10 \text{ cm})\hat{j} \rightarrow (14 \text{ cm} \angle -135^\circ).$$

(c) In this case, we have  $\vec{r}_1 = (-10 \text{ cm})\hat{j}$  and  $\vec{r}_2 = (10 \text{ cm})\hat{j}$ , and  $\Delta\vec{r} = (20 \text{ cm})\hat{j}$ . Thus,  $|\Delta\vec{r}| = 20 \text{ cm}$ .

(d) Using Eq. 3-6, the angle is given by

$$\theta = \tan^{-1}\left(\frac{20 \text{ cm}}{0 \text{ cm}}\right) = 90^\circ.$$

(e) In a full-hour sweep, the hand returns to its starting position, and the displacement is zero.

(f) The corresponding angle for a full-hour sweep is also zero.

5. Using Eq. 4-3 and Eq. 4-8, we have

$$\vec{v}_{\text{avg}} = \frac{(-2.0\hat{i} + 8.0\hat{j} - 2.0\hat{k}) \text{ m} - (5.0\hat{i} - 6.0\hat{j} + 2.0\hat{k}) \text{ m}}{10 \text{ s}} = (-0.70\hat{i} + 1.40\hat{j} - 0.40\hat{k}) \text{ m/s}.$$

6. To emphasize the fact that the velocity is a function of time, we adopt the notation  $v(t)$  for  $dx/dt$ .

(a) Eq. 4-10 leads to

$$v(t) = \frac{d}{dt} (3.00t\hat{i} - 4.00t^2\hat{j} + 2.00\hat{k}) = (3.00 \text{ m/s})\hat{i} - (8.00t \text{ m/s})\hat{j}$$

(b) Evaluating this result at  $t = 2.00 \text{ s}$  produces  $\vec{v} = (3.00\hat{i} - 16.0\hat{j}) \text{ m/s}$ .

(c) The speed at  $t = 2.00 \text{ s}$  is  $v = |\vec{v}| = \sqrt{(3.00 \text{ m/s})^2 + (-16.0 \text{ m/s})^2} = 16.3 \text{ m/s}$ .

(d) The angle of  $\vec{v}$  at that moment is

$$\tan^{-1} \left( \frac{-16.0 \text{ m/s}}{3.00 \text{ m/s}} \right) = -79.4^\circ \text{ or } 101^\circ$$

where we choose the first possibility ( $79.4^\circ$  measured *clockwise* from the  $+x$  direction, or  $281^\circ$  counterclockwise from  $+x$ ) since the signs of the components imply the vector is in the fourth quadrant.

7. The average velocity is given by Eq. 4-8. The total displacement  $\Delta\vec{r}$  is the sum of three displacements, each result of a (constant) velocity during a given time. We use a coordinate system with +x East and +y North.

(a) In unit-vector notation, the first displacement is given by

$$\Delta\vec{r}_1 = \left( 60.0 \frac{\text{km}}{\text{h}} \right) \left( \frac{40.0 \text{ min}}{60 \text{ min/h}} \right) \hat{i} = (40.0 \text{ km})\hat{i}.$$

The second displacement has a magnitude of  $(60.0 \frac{\text{km}}{\text{h}}) \cdot (\frac{20.0 \text{ min}}{60 \text{ min/h}}) = 20.0 \text{ km}$ , and its direction is  $40^\circ$  north of east. Therefore,

$$\Delta\vec{r}_2 = (20.0 \text{ km}) \cos(40.0^\circ) \hat{i} + (20.0 \text{ km}) \sin(40.0^\circ) \hat{j} = (15.3 \text{ km}) \hat{i} + (12.9 \text{ km}) \hat{j}.$$

And the third displacement is

$$\Delta\vec{r}_3 = - \left( 60.0 \frac{\text{km}}{\text{h}} \right) \left( \frac{50.0 \text{ min}}{60 \text{ min/h}} \right) \hat{i} = (-50.0 \text{ km})\hat{i}.$$

The total displacement is

$$\begin{aligned} \Delta\vec{r} &= \Delta\vec{r}_1 + \Delta\vec{r}_2 + \Delta\vec{r}_3 = (40.0 \text{ km})\hat{i} + (15.3 \text{ km})\hat{i} + (12.9 \text{ km})\hat{j} - (50.0 \text{ km})\hat{i} \\ &= (5.30 \text{ km})\hat{i} + (12.9 \text{ km})\hat{j}. \end{aligned}$$

The time for the trip is  $(40.0 + 20.0 + 50.0) \text{ min} = 110 \text{ min}$ , which is equivalent to 1.83 h. Eq. 4-8 then yields

$$\vec{v}_{\text{avg}} = \left( \frac{5.30 \text{ km}}{1.83 \text{ h}} \right) \hat{i} + \left( \frac{12.9 \text{ km}}{1.83 \text{ h}} \right) \hat{j} = (2.90 \text{ km/h})\hat{i} + (7.01 \text{ km/h})\hat{j}.$$

The magnitude is

$$|\vec{v}_{\text{avg}}| = \sqrt{(2.90 \text{ km/h})^2 + (7.01 \text{ km/h})^2} = 7.59 \text{ km/h}.$$

(b) The angle is given by

$$\theta = \tan^{-1} \left( \frac{7.01 \text{ km/h}}{2.90 \text{ km/h}} \right) = 67.5^\circ \text{ (north of east),}$$

or  $22.5^\circ$  east of due north.

8. Our coordinate system has  $\hat{i}$  pointed east and  $\hat{j}$  pointed north. The first displacement is  $\vec{r}_{AB} = (483 \text{ km})\hat{i}$  and the second is  $\vec{r}_{BC} = (-966 \text{ km})\hat{j}$ .

(a) The net displacement is

$$\vec{r}_{AC} = \vec{r}_{AB} + \vec{r}_{BC} = (483 \text{ km})\hat{i} - (966 \text{ km})\hat{j}$$

which yields  $|\vec{r}_{AC}| = \sqrt{(483 \text{ km})^2 + (-966 \text{ km})^2} = 1.08 \times 10^3 \text{ km}$ .

(b) The angle is given by

$$\theta = \tan^{-1} \left( \frac{-966 \text{ km}}{483 \text{ km}} \right) = -63.4^\circ.$$

We observe that the angle can be alternatively expressed as  $63.4^\circ$  south of east, or  $26.6^\circ$  east of south.

(c) Dividing the magnitude of  $\vec{r}_{AC}$  by the total time (2.25 h) gives

$$\vec{v}_{\text{avg}} = \frac{(483 \text{ km})\hat{i} - (966 \text{ km})\hat{j}}{2.25 \text{ h}} = (215 \text{ km/h})\hat{i} - (429 \text{ km/h})\hat{j}.$$

with a magnitude  $|\vec{v}_{\text{avg}}| = \sqrt{(215 \text{ km/h})^2 + (-429 \text{ km/h})^2} = 480 \text{ km/h}$ .

(d) The direction of  $\vec{v}_{\text{avg}}$  is  $26.6^\circ$  east of south, same as in part (b). In magnitude-angle notation, we would have  $\vec{v}_{\text{avg}} = (480 \text{ km/h} \angle -63.4^\circ)$ .

(e) Assuming the  $AB$  trip was a straight one, and similarly for the  $BC$  trip, then  $|\vec{r}_{AB}|$  is the distance traveled during the  $AB$  trip, and  $|\vec{r}_{BC}|$  is the distance traveled during the  $BC$  trip. Since the average speed is the total distance divided by the total time, it equals

$$\frac{483 \text{ km} + 966 \text{ km}}{2.25 \text{ h}} = 644 \text{ km/h}.$$

9. The  $(x,y)$  coordinates (in meters) of the points are  $A = (15, -15)$ ,  $B = (30, -45)$ ,  $C = (20, -15)$ , and  $D = (45, 45)$ . The respective times are  $t_A = 0$ ,  $t_B = 300$  s,  $t_C = 600$  s, and  $t_D = 900$  s. Average velocity is defined by Eq. 4-8. Each displacement  $\Delta \vec{r}$  is understood to originate at point  $A$ .

(a) The average velocity having the least magnitude ( $5.0$  m/ $600$  s) is for the displacement ending at point  $C$ :  $|\vec{v}_{avg}| = 0.0083$  m/s.

(b) The direction of  $\vec{v}_{avg}$  is  $0^\circ$  (measured counterclockwise from the  $+x$  axis).

(c) The average velocity having the greatest magnitude ( $\sqrt{(15 \text{ m})^2 + (30 \text{ m})^2} / 300 \text{ s}$ ) is for the displacement ending at point  $B$ :  $|\vec{v}_{avg}| = 0.11$  m/s.

(d) The direction of  $\vec{v}_{avg}$  is  $297^\circ$  (counterclockwise from  $+x$ ) or  $-63^\circ$  (which is equivalent to measuring  $63^\circ$  clockwise from the  $+x$  axis).



10. We differentiate  $\vec{r} = 5.00t \hat{i} + (et + ft^2) \hat{j}$ .

(a) The particle's motion is indicated by the derivative of  $\vec{r}$  :  $\vec{v} = 5.00 \hat{i} + (e + 2ft) \hat{j}$ .  
The angle of its direction of motion is consequently

$$\theta = \tan^{-1}(v_y/v_x) = \tan^{-1}[(e + 2ft)/5.00].$$

The graph indicates  $\theta_0 = 35.0^\circ$  which determines the parameter  $e$ :

$$e = (5.00 \text{ m/s}) \tan(35.0^\circ) = 3.50 \text{ m/s}.$$

(b) We note (from the graph) that  $\theta = 0$  when  $t = 14.0 \text{ s}$ . Thus,  $e + 2ft = 0$  at that time.  
This determines the parameter  $f$ :

$$f = \frac{-e}{2t} = \frac{-3.5 \text{ m/s}}{2(14.0 \text{ s})} = -0.125 \text{ m/s}^2.$$

11. We apply Eq. 4-10 and Eq. 4-16.

(a) Taking the derivative of the position vector with respect to time, we have, in SI units (m/s),

$$\vec{v} = \frac{d}{dt}(\hat{i} + 4t^2\hat{j} + t\hat{k}) = 8t\hat{j} + \hat{k}.$$

(b) Taking another derivative with respect to time leads to, in SI units (m/s<sup>2</sup>),

$$\vec{a} = \frac{d}{dt}(8t\hat{j} + \hat{k}) = 8\hat{j}.$$

12. We use Eq. 4-15 with  $\vec{v}_1$  designating the initial velocity and  $\vec{v}_2$  designating the later one.

(a) The average acceleration during the  $\Delta t = 4$  s interval is

$$\vec{a}_{\text{avg}} = \frac{(-2.0\hat{i} - 2.0\hat{j} + 5.0\hat{k}) \text{ m/s} - (4.0\hat{i} - 22\hat{j} + 3.0\hat{k}) \text{ m/s}}{4 \text{ s}} = (-1.5 \text{ m/s}^2)\hat{i} + (0.5 \text{ m/s}^2)\hat{k}.$$

(b) The magnitude of  $\vec{a}_{\text{avg}}$  is  $\sqrt{(-1.5 \text{ m/s}^2)^2 + (0.5 \text{ m/s}^2)^2} = 1.6 \text{ m/s}^2$ .

(c) Its angle in the  $xz$  plane (measured from the  $+x$  axis) is one of these possibilities:

$$\tan^{-1}\left(\frac{0.5 \text{ m/s}^2}{-1.5 \text{ m/s}^2}\right) = -18^\circ \text{ or } 162^\circ$$

where we settle on the second choice since the signs of its components imply that it is in the second quadrant.

13. In parts (b) and (c), we use Eq. 4-10 and Eq. 4-16. For part (d), we find the direction of the velocity computed in part (b), since that represents the asked-for tangent line.

(a) Plugging into the given expression, we obtain

$$\vec{r}\Big|_{t=2.00} = [2.00(8) - 5.00(2)]\hat{i} + [6.00 - 7.00(16)]\hat{j} = (6.00\hat{i} - 106\hat{j}) \text{ m}$$

(b) Taking the derivative of the given expression produces

$$\vec{v}(t) = (6.00t^2 - 5.00)\hat{i} - 28.0t^3\hat{j}$$

where we have written  $v(t)$  to emphasize its dependence on time. This becomes, at  $t = 2.00$  s,  $\vec{v} = (19.0\hat{i} - 224\hat{j})$  m/s.

(c) Differentiating the  $\vec{v}(t)$  found above, with respect to  $t$  produces  $12.0t\hat{i} - 84.0t^2\hat{j}$ , which yields  $\vec{a} = (24.0\hat{i} - 336\hat{j})$  m/s<sup>2</sup> at  $t = 2.00$  s.

(d) The angle of  $\vec{v}$ , measured from  $+x$ , is either

$$\tan^{-1}\left(\frac{-224 \text{ m/s}}{19.0 \text{ m/s}}\right) = -85.2^\circ \text{ or } 94.8^\circ$$

where we settle on the first choice ( $-85.2^\circ$ , which is equivalent to  $275^\circ$  measured counterclockwise from the  $+x$  axis) since the signs of its components imply that it is in the fourth quadrant.

14. We adopt a coordinate system with  $\hat{i}$  pointed east and  $\hat{j}$  pointed north; the coordinate origin is the flagpole. We “translate” the given information into unit-vector notation as follows:

$$\begin{aligned}\vec{r}_0 &= (40.0 \text{ m})\hat{i} & \text{and} & & \vec{v}_0 &= (-10.0 \text{ m/s})\hat{j} \\ \vec{r} &= (40.0 \text{ m})\hat{j} & \text{and} & & \vec{v} &= (10.0 \text{ m/s})\hat{i}.\end{aligned}$$

(a) Using Eq. 4-2, the displacement  $\Delta\vec{r}$  is

$$\Delta\vec{r} = \vec{r} - \vec{r}_0 = (-40.0 \text{ m})\hat{i} + (40.0 \text{ m})\hat{j}.$$

with a magnitude  $|\Delta\vec{r}| = \sqrt{(-40.0 \text{ m})^2 + (40.0 \text{ m})^2} = 56.6 \text{ m}$ .

(b) The direction of  $\Delta\vec{r}$  is

$$\theta = \tan^{-1}\left(\frac{\Delta y}{\Delta x}\right) = \tan^{-1}\left(\frac{40.0 \text{ m}}{-40.0 \text{ m}}\right) = -45.0^\circ \text{ or } 135^\circ.$$

Since the desired angle is in the second quadrant, we pick  $135^\circ$  ( $45^\circ$  north of due west). Note that the displacement can be written as  $\Delta\vec{r} = \vec{r} - \vec{r}_0 = (56.6 \angle 135^\circ)$  in terms of the magnitude-angle notation.

(c) The magnitude of  $\vec{v}_{\text{avg}}$  is simply the magnitude of the displacement divided by the time ( $\Delta t = 30.0 \text{ s}$ ). Thus, the average velocity has magnitude  $(56.6 \text{ m})/(30.0 \text{ s}) = 1.89 \text{ m/s}$ .

(d) Eq. 4-8 shows that  $\vec{v}_{\text{avg}}$  points in the same direction as  $\Delta\vec{r}$ , i.e,  $135^\circ$  ( $45^\circ$  north of due west).

(e) Using Eq. 4-15, we have

$$\vec{a}_{\text{avg}} = \frac{\vec{v} - \vec{v}_0}{\Delta t} = (0.333 \text{ m/s}^2)\hat{i} + (0.333 \text{ m/s}^2)\hat{j}.$$

The magnitude of the average acceleration vector is therefore equal to  $|\vec{a}_{\text{avg}}| = \sqrt{(0.333 \text{ m/s}^2)^2 + (0.333 \text{ m/s}^2)^2} = 0.471 \text{ m/s}^2$ .

(f) The direction of  $\vec{a}_{\text{avg}}$  is

$$\theta = \tan^{-1}\left(\frac{0.333 \text{ m/s}^2}{0.333 \text{ m/s}^2}\right) = 45^\circ \text{ or } -135^\circ.$$

Since the desired angle is now in the first quadrant, we choose  $45^\circ$ , and  $\vec{a}_{\text{avg}}$  points north of due east.

15. We find  $t$  by applying Eq. 2-11 to motion along the  $y$  axis (with  $v_y = 0$  characterizing  $y = y_{\max}$ ):

$$0 = (12 \text{ m/s}) + (-2.0 \text{ m/s}^2)t \Rightarrow t = 6.0 \text{ s}.$$

Then, Eq. 2-11 applies to motion along the  $x$  axis to determine the answer:

$$v_x = (8.0 \text{ m/s}) + (4.0 \text{ m/s}^2)(6.0 \text{ s}) = 32 \text{ m/s}.$$

Therefore, the velocity of the cart, when it reaches  $y = y_{\max}$ , is  $(32 \text{ m/s})\hat{i}$ .

16. We find  $t$  by solving  $\Delta x = x_0 + v_{0x}t + \frac{1}{2}a_x t^2$ :

$$12.0 \text{ m} = 0 + (4.00 \text{ m/s})t + \frac{1}{2}(5.00 \text{ m/s}^2)t^2$$

where we have used  $\Delta x = 12.0 \text{ m}$ ,  $v_x = 4.00 \text{ m/s}$ , and  $a_x = 5.00 \text{ m/s}^2$ . We use the quadratic formula and find  $t = 1.53 \text{ s}$ . Then, Eq. 2-11 (actually, its analog in two dimensions) applies with this value of  $t$ . Therefore, its velocity (when  $\Delta x = 12.00 \text{ m}$ ) is

$$\begin{aligned}\vec{v} &= \vec{v}_0 + \vec{a}t = (4.00 \text{ m/s})\hat{i} + (5.00 \text{ m/s}^2)(1.53 \text{ s})\hat{i} + (7.00 \text{ m/s}^2)(1.53 \text{ s})\hat{j} \\ &= (11.7 \text{ m/s})\hat{i} + (10.7 \text{ m/s})\hat{j}.\end{aligned}$$

Thus, the magnitude of  $\vec{v}$  is  $|\vec{v}| = \sqrt{(11.7 \text{ m/s})^2 + (10.7 \text{ m/s})^2} = 15.8 \text{ m/s}$ .

(b) The angle of  $\vec{v}$ , measured from  $+x$ , is

$$\tan^{-1}\left(\frac{10.7 \text{ m/s}}{11.7 \text{ m/s}}\right) = 42.6^\circ.$$

17. Constant acceleration in both directions ( $x$  and  $y$ ) allows us to use Table 2-1 for the motion along each direction. This can be handled individually (for  $\Delta x$  and  $\Delta y$ ) or together with the unit-vector notation (for  $\Delta \vec{r}$ ). Where units are not shown, SI units are to be understood.

(a) The velocity of the particle at any time  $t$  is given by  $\vec{v} = \vec{v}_0 + \vec{a}t$ , where  $\vec{v}_0$  is the initial velocity and  $\vec{a}$  is the (constant) acceleration. The  $x$  component is  $v_x = v_{0x} + a_x t = 3.00 - 1.00t$ , and the  $y$  component is

$$v_y = v_{0y} + a_y t = -0.500t$$

since  $v_{0y} = 0$ . When the particle reaches its maximum  $x$  coordinate at  $t = t_m$ , we must have  $v_x = 0$ . Therefore,  $3.00 - 1.00t_m = 0$  or  $t_m = 3.00$  s. The  $y$  component of the velocity at this time is

$$v_y = 0 - 0.500(3.00) = -1.50 \text{ m/s};$$

this is the only nonzero component of  $\vec{v}$  at  $t_m$ .

(b) Since it started at the origin, the coordinates of the particle at any time  $t$  are given by  $\vec{r} = \vec{v}_0 t + \frac{1}{2} \vec{a} t^2$ . At  $t = t_m$  this becomes

$$\vec{r} = (3.00\hat{i})(3.00) + \frac{1}{2}(-1.00\hat{i} - 0.50\hat{j})(3.00)^2 = (4.50\hat{i} - 2.25\hat{j}) \text{ m}.$$



18. We make use of Eq. 4-16.

(a) The acceleration as a function of time is

$$\vec{a} = \frac{d\vec{v}}{dt} = \frac{d}{dt} \left( (6.0t - 4.0t^2)\hat{i} + 8.0\hat{j} \right) = (6.0 - 8.0t)\hat{i}$$

in SI units. Specifically, we find the acceleration vector at  $t = 3.0$  s to be  $(6.0 - 8.0(3.0))\hat{i} = (-18 \text{ m/s}^2)\hat{i}$ .

(b) The equation is  $\vec{a} = (6.0 - 8.0t)\hat{i} = 0$ ; we find  $t = 0.75$  s.

(c) Since the  $y$  component of the velocity,  $v_y = 8.0$  m/s, is never zero, the velocity cannot vanish.

(d) Since speed is the magnitude of the velocity, we have

$$v = |\vec{v}| = \sqrt{(6.0t - 4.0t^2)^2 + (8.0)^2} = 10$$

in SI units (m/s). To solve for  $t$ , we first square both sides of the above equation, followed by some rearrangement:

$$(6.0t - 4.0t^2)^2 + 64 = 100 \Rightarrow (6.0t - 4.0t^2)^2 = 36$$

Taking the square root of the new expression and making further simplification lead to

$$6.0t - 4.0t^2 = \pm 6.0 \Rightarrow 4.0t^2 - 6.0t \pm 6.0 = 0$$

Finally, using the quadratic formula, we obtain

$$t = \frac{6.0 \pm \sqrt{36 - 4(4.0)(\pm 6.0)}}{2(4.0)}$$

where the requirement of a real positive result leads to the unique answer:  $t = 2.2$  s.

19. We make use of Eq. 4-16 and Eq. 4-10.

Using  $\vec{a} = 3t\hat{i} + 4t\hat{j}$ , we have (in m/s)

$$\vec{v}(t) = \vec{v}_0 + \int_0^t \vec{a} \, dt = (5.00\hat{i} + 2.00\hat{j}) + \int_0^t (3t\hat{i} + 4t\hat{j}) \, dt = (5.00 + 3t^2/2)\hat{i} + (2.00 + 2t^2)\hat{j}$$

Integrating using Eq. 4-10 then yields (in metres)

$$\begin{aligned}\vec{r}(t) &= \vec{r}_0 + \int_0^t \vec{v} \, dt = (20.0\hat{i} + 40.0\hat{j}) + \int_0^t [(5.00 + 3t^2/2)\hat{i} + (2.00 + 2t^2)\hat{j}] \, dt \\ &= (20.0\hat{i} + 40.0\hat{j}) + (5.00t + t^3/2)\hat{i} + (2.00t + 2t^3/3)\hat{j} \\ &= (20.0 + 5.00t + t^3/2)\hat{i} + (40.0 + 2.00t + 2t^3/3)\hat{j}\end{aligned}$$

(a) At  $t = 4.00 \text{ s}$ , we have  $\vec{r}(t = 4.00 \text{ s}) = (72.0 \text{ m})\hat{i} + (90.7 \text{ m})\hat{j}$ .

(b)  $\vec{v}(t = 4.00 \text{ s}) = (29.0 \text{ m/s})\hat{i} + (34.0 \text{ m/s})\hat{j}$ . Thus, the angle between the direction of travel and  $+x$ , measured counterclockwise, is  $\theta = \tan^{-1}[(34.0 \text{ m/s})/(29.0 \text{ m/s})] = 49.5^\circ$ .

20. The acceleration is constant so that use of Table 2-1 (for both the  $x$  and  $y$  motions) is permitted. Where units are not shown, SI units are to be understood. Collision between particles  $A$  and  $B$  requires two things. First, the  $y$  motion of  $B$  must satisfy (using Eq. 2-15 and noting that  $\theta$  is measured from the  $y$  axis)

$$y = \frac{1}{2} a_y t^2 \Rightarrow 30 \text{ m} = \frac{1}{2} [(0.40 \text{ m/s}^2) \cos \theta] t^2.$$

Second, the  $x$  motions of  $A$  and  $B$  must coincide:

$$vt = \frac{1}{2} a_x t^2 \Rightarrow (3.0 \text{ m/s})t = \frac{1}{2} [(0.40 \text{ m/s}^2) \sin \theta] t^2.$$

We eliminate a factor of  $t$  in the last relationship and formally solve for time:

$$t = \frac{2v}{a_x} = \frac{2(3.0 \text{ m/s})}{(0.40 \text{ m/s}^2) \sin \theta}.$$

This is then plugged into the previous equation to produce

$$30 \text{ m} = \frac{1}{2} [(0.40 \text{ m/s}^2) \cos \theta] \left( \frac{2(3.0 \text{ m/s})}{(0.40 \text{ m/s}^2) \sin \theta} \right)^2$$

which, with the use of  $\sin^2 \theta = 1 - \cos^2 \theta$ , simplifies to

$$30 = \frac{9.0}{0.20} \frac{\cos \theta}{1 - \cos^2 \theta} \Rightarrow 1 - \cos^2 \theta = \frac{9.0}{(0.20)(30)} \cos \theta.$$

We use the quadratic formula (choosing the positive root) to solve for  $\cos \theta$ :

$$\cos \theta = \frac{-1.5 + \sqrt{1.5^2 - 4(1.0)(-1.0)}}{2} = \frac{1}{2}$$

which yields  $\theta = \cos^{-1} \left( \frac{1}{2} \right) = 60^\circ$ .

21. (a) From Eq. 4-22 (with  $\theta_0 = 0$ ), the time of flight is

$$t = \sqrt{\frac{2h}{g}} = \sqrt{\frac{2(45.0 \text{ m})}{9.80 \text{ m/s}^2}} = 3.03 \text{ s}.$$

(b) The horizontal distance traveled is given by Eq. 4-21:

$$\Delta x = v_0 t = (250 \text{ m/s})(3.03 \text{ s}) = 758 \text{ m}.$$

(c) And from Eq. 4-23, we find

$$|v_y| = gt = (9.80 \text{ m/s}^2)(3.03 \text{ s}) = 29.7 \text{ m/s}.$$

22. We use Eq. 4-26

$$R_{\max} = \left( \frac{v_0^2}{g} \sin 2\theta_0 \right)_{\max} = \frac{v_0^2}{g} = \frac{(9.50 \text{ m/s})^2}{9.80 \text{ m/s}^2} = 9.209 \text{ m} \approx 9.21 \text{ m}$$

to compare with Powell's long jump; the difference from  $R_{\max}$  is only  $\Delta R = (9.21 \text{ m} - 8.95 \text{ m}) = 0.259 \text{ m}$ .

23. Using Eq. (4-26), the take-off speed of the jumper is

$$v_0 = \sqrt{\frac{gR}{\sin 2\theta_0}} = \sqrt{\frac{(9.80 \text{ m/s}^2)(77.0 \text{ m})}{\sin 2(12.0^\circ)}} = 43.1 \text{ m/s}$$

24. We adopt the positive direction choices used in the textbook so that equations such as Eq. 4-22 are directly applicable.

(a) With the origin at the initial point (edge of table), the  $y$  coordinate of the ball is given by  $y = -\frac{1}{2}gt^2$ . If  $t$  is the time of flight and  $y = -1.20$  m indicates the level at which the ball hits the floor, then

$$t = \sqrt{\frac{2(-1.20 \text{ m})}{-9.80 \text{ m/s}^2}} = 0.495 \text{ s}.$$

(b) The initial (horizontal) velocity of the ball is  $\vec{v} = v_0 \hat{i}$ . Since  $x = 1.52$  m is the horizontal position of its impact point with the floor, we have  $x = v_0 t$ . Thus,

$$v_0 = \frac{x}{t} = \frac{1.52 \text{ m}}{0.495 \text{ s}} = 3.07 \text{ m/s}.$$

25. We adopt the positive direction choices used in the textbook so that equations such as Eq. 4-22 are directly applicable. The initial velocity is horizontal so that  $v_{0,y} = 0$  and  $v_{0,x} = v_0 = 10 \text{ m/s}$ .

(a) With the origin at the initial point (where the dart leaves the thrower's hand), the  $y$  coordinate of the dart is given by  $y = -\frac{1}{2}gt^2$ , so that with  $y = -PQ$  we have  $PQ = \frac{1}{2}(9.8 \text{ m/s}^2)(0.19 \text{ s})^2 = 0.18 \text{ m}$ .

(b) From  $x = v_0t$  we obtain  $x = (10 \text{ m/s})(0.19 \text{ s}) = 1.9 \text{ m}$ .



26. (a) Using the same coordinate system assumed in Eq. 4-22, we solve for  $y = h$ :

$$h = y_0 + v_0 \sin \theta_0 t - \frac{1}{2} g t^2$$

which yields  $h = 51.8$  m for  $y_0 = 0$ ,  $v_0 = 42.0$  m/s,  $\theta_0 = 60.0^\circ$  and  $t = 5.50$  s.

(b) The horizontal motion is steady, so  $v_x = v_{0x} = v_0 \cos \theta_0$ , but the vertical component of velocity varies according to Eq. 4-23. Thus, the speed at impact is

$$v = \sqrt{(v_0 \cos \theta_0)^2 + (v_0 \sin \theta_0 - g t)^2} = 27.4 \text{ m/s.}$$

(c) We use Eq. 4-24 with  $v_y = 0$  and  $y = H$ :

$$H = \frac{(v_0 \sin \theta_0)^2}{2g} = 67.5 \text{ m.}$$

27. We adopt the positive direction choices used in the textbook so that equations such as Eq. 4-22 are directly applicable. The coordinate origin is at ground level directly below the release point. We write  $\theta_0 = -30.0^\circ$  since the angle shown in the figure is measured clockwise from horizontal. We note that the initial speed of the decoy is the plane's speed at the moment of release:  $v_0 = 290 \text{ km/h}$ , which we convert to SI units:  $(290)(1000/3600) = 80.6 \text{ m/s}$ .

(a) We use Eq. 4-12 to solve for the time:

$$\Delta x = (v_0 \cos \theta_0) t \Rightarrow t = \frac{700 \text{ m}}{(80.6 \text{ m/s}) \cos(-30.0^\circ)} = 10.0 \text{ s}.$$

(b) And we use Eq. 4-22 to solve for the initial height  $y_0$ :

$$y - y_0 = (v_0 \sin \theta_0) t - \frac{1}{2} g t^2 \Rightarrow 0 - y_0 = (-40.3 \text{ m/s})(10.0 \text{ s}) - \frac{1}{2} (9.80 \text{ m/s}^2)(10.0 \text{ s})^2$$

which yields  $y_0 = 897 \text{ m}$ .

28. We adopt the positive direction choices used in the textbook so that equations such as Eq. 4-22 are directly applicable. The coordinate origin is throwing point (the stone's initial position). The  $x$  component of its initial velocity is given by  $v_{0x} = v_0 \cos \theta_0$  and the  $y$  component is given by  $v_{0y} = v_0 \sin \theta_0$ , where  $v_0 = 20 \text{ m/s}$  is the initial speed and  $\theta_0 = 40.0^\circ$  is the launch angle.

(a) At  $t = 1.10 \text{ s}$ , its  $x$  coordinate is

$$x = v_0 t \cos \theta_0 = (20.0 \text{ m/s})(1.10 \text{ s}) \cos 40.0^\circ = 16.9 \text{ m}$$

(b) Its  $y$  coordinate at that instant is

$$y = v_0 t \sin \theta_0 - \frac{1}{2} g t^2 = (20.0 \text{ m/s})(1.10 \text{ s}) \sin 40.0^\circ - \frac{1}{2} (9.80 \text{ m/s}^2)(1.10 \text{ s})^2 = 8.21 \text{ m}.$$

(c) At  $t' = 1.80 \text{ s}$ , its  $x$  coordinate is  $x = (20.0 \text{ m/s})(1.80 \text{ s}) \cos 40.0^\circ = 27.6 \text{ m}$ .

(d) Its  $y$  coordinate at  $t'$  is

$$y = (20.0 \text{ m/s})(1.80 \text{ s}) \sin 40.0^\circ - \frac{1}{2} (9.80 \text{ m/s}^2) (1.80 \text{ s})^2 = 7.26 \text{ m}.$$

(e) The stone hits the ground earlier than  $t = 5.0 \text{ s}$ . To find the time when it hits the ground solve  $y = v_0 t \sin \theta_0 - \frac{1}{2} g t^2 = 0$  for  $t$ . We find

$$t = \frac{2v_0}{g} \sin \theta_0 = \frac{2(20.0 \text{ m/s})}{9.8 \text{ m/s}^2} \sin 40^\circ = 2.62 \text{ s}.$$

Its  $x$  coordinate on landing is

$$x = v_0 t \cos \theta_0 = (20.0 \text{ m/s})(2.62 \text{ s}) \cos 40^\circ = 40.2 \text{ m}.$$

(f) Assuming it stays where it lands, its vertical component at  $t = 5.00 \text{ s}$  is  $y = 0$ .

29. The initial velocity has no vertical component — only an  $x$  component equal to +2.00 m/s. Also,  $y_0 = +10.0$  m if the water surface is established as  $y = 0$ .

(a)  $x - x_0 = v_x t$  readily yields  $x - x_0 = 1.60$  m.

(b) Using  $y - y_0 = v_{0y} t - \frac{1}{2} g t^2$ , we obtain  $y = 6.86$  m when  $t = 0.800$  s and  $v_{0y} = 0$ .

(c) Using the fact that  $y = 0$  and  $y_0 = 10.0$ , the equation  $y - y_0 = v_{0y} t - \frac{1}{2} g t^2$  leads to

$$t = \sqrt{2(10.0 \text{ m})/9.80 \text{ m/s}^2} = 1.43 \text{ s}.$$

During this time, the  $x$ -displacement of the diver is  $x - x_0 = (2.00 \text{ m/s})(1.43 \text{ s}) = 2.86$  m.

30. (a) Since the  $y$ -component of the velocity of the stone at the top of its path is zero, its speed is

$$v = \sqrt{v_x^2 + v_y^2} = v_x = v_0 \cos \theta_0 = (28.0 \text{ m/s}) \cos 40.0^\circ = 21.4 \text{ m/s}.$$

(b) Using the fact that  $v_y = 0$  at the maximum height  $y_{\max}$ , the amount of time it takes for the stone to reach  $y_{\max}$  is given by Eq. 4-23:

$$0 = v_y = v_0 \sin \theta_0 - gt \Rightarrow t = \frac{v_0 \sin \theta_0}{g}.$$

Substituting the above expression into Eq. 4-22, we find the maximum height to be

$$y_{\max} = (v_0 \sin \theta_0) t - \frac{1}{2} g t^2 = v_0 \sin \theta_0 \left( \frac{v_0 \sin \theta_0}{g} \right) - \frac{1}{2} g \left( \frac{v_0 \sin \theta_0}{g} \right)^2 = \frac{v_0^2 \sin^2 \theta_0}{2g}.$$

To find the time the stone descends to  $y = y_{\max} / 2$ , we solve the quadratic equation given in Eq. 4-22:

$$y = \frac{1}{2} y_{\max} = \frac{v_0^2 \sin^2 \theta_0}{4g} = (v_0 \sin \theta_0) t - \frac{1}{2} g t^2 \Rightarrow t_{\pm} = \frac{(2 \pm \sqrt{2}) v_0 \sin \theta_0}{2g}.$$

Choosing  $t = t_+$  (for descending), we have

$$v_x = v_0 \cos \theta_0 = (28.0 \text{ m/s}) \cos 40.0^\circ = 21.4 \text{ m/s}$$

$$v_y = v_0 \sin \theta_0 - g \frac{(2 + \sqrt{2}) v_0 \sin \theta_0}{2g} = -\frac{\sqrt{2}}{2} v_0 \sin \theta_0 = -\frac{\sqrt{2}}{2} (28.0 \text{ m/s}) \sin 40.0^\circ = -12.7 \text{ m/s}$$

Thus, the speed of the stone when  $y = y_{\max} / 2$  is

$$v = \sqrt{v_x^2 + v_y^2} = \sqrt{(21.4 \text{ m/s})^2 + (-12.7 \text{ m/s})^2} = 24.9 \text{ m/s}.$$

(c) The percentage difference is

$$\frac{24.9 \text{ m/s} - 21.4 \text{ m/s}}{21.4 \text{ m/s}} = 0.163 = 16.3\%.$$

31. We adopt the positive direction choices used in the textbook so that equations such as Eq. 4-22 are directly applicable. The coordinate origin is at ground level directly below the release point. We write  $\theta_0 = -37.0^\circ$  for the angle measured from  $+x$ , since the angle given in the problem is measured from the  $-y$  direction. We note that the initial speed of the projectile is the plane's speed at the moment of release.

(a) We use Eq. 4-22 to find  $v_0$ :

$$y - y_0 = (v_0 \sin \theta_0) t - \frac{1}{2} g t^2 \Rightarrow 0 - 730 \text{ m} = v_0 \sin(-37.0^\circ)(5.00 \text{ s}) - \frac{1}{2}(9.80 \text{ m/s}^2)(5.00 \text{ s})^2$$

which yields  $v_0 = 202 \text{ m/s}$ .

(b) The horizontal distance traveled is  $x = v_0 t \cos \theta_0 = (202 \text{ m/s})(5.00 \text{ s}) \cos(-37.0^\circ) = 806 \text{ m}$ .

(c) The  $x$  component of the velocity (just before impact) is

$$v_x = v_0 \cos \theta_0 = (202 \text{ m/s}) \cos(-37.0^\circ) = 161 \text{ m/s}.$$

(d) The  $y$  component of the velocity (just before impact) is

$$v_y = v_0 \sin \theta_0 - g t = (202 \text{ m/s}) \sin(-37.0^\circ) - (9.80 \text{ m/s}^2)(5.00 \text{ s}) = -171 \text{ m/s}.$$

32. We adopt the positive direction choices used in the textbook so that equations such as Eq. 4-22 are directly applicable. The coordinate origin is at ground level directly below the point where the ball was hit by the racquet.

(a) We want to know how high the ball is above the court when it is at  $x = 12.0$  m. First, Eq. 4-21 tells us the time it is over the fence:

$$t = \frac{x}{v_0 \cos \theta_0} = \frac{12.0 \text{ m}}{(23.6 \text{ m/s}) \cos 0^\circ} = 0.508 \text{ s}.$$

At this moment, the ball is at a height (above the court) of

$$y = y_0 + (v_0 \sin \theta_0) t - \frac{1}{2} g t^2 = 1.10 \text{ m}$$

which implies it does indeed clear the 0.90 m high fence.

(b) At  $t = 0.508$  s, the center of the ball is  $(1.10 \text{ m} - 0.90 \text{ m}) = 0.20$  m above the net.

(c) Repeating the computation in part (a) with  $\theta_0 = -5.0^\circ$  results in  $t = 0.510$  s and  $y = 0.040$  m, which clearly indicates that it cannot clear the net.

(d) In the situation discussed in part (c), the distance between the top of the net and the center of the ball at  $t = 0.510$  s is  $0.90 \text{ m} - 0.040 \text{ m} = 0.86$  m.

33. We first find the time it takes for the volleyball to hit the ground. Using Eq. 4-22, we have

$$y - y_0 = (v_0 \sin \theta_0) t - \frac{1}{2} g t^2 \Rightarrow 0 - 2.30 \text{ m} = (-20.0 \text{ m/s}) \sin(18.0^\circ) t - \frac{1}{2} (9.80 \text{ m/s}^2) t^2$$

which gives  $t = 0.30 \text{ s}$ . Thus, the range of the volleyball is

$$R = (v_0 \cos \theta_0) t = (20.0 \text{ m/s}) \cos 18.0^\circ (0.30 \text{ s}) = 5.71 \text{ m}$$

On the other hand, when the angle is changed to  $\theta'_0 = 8.00^\circ$ , using the same procedure as shown above, we find

$$y - y_0 = (v_0 \sin \theta'_0) t' - \frac{1}{2} g t'^2 \Rightarrow 0 - 2.30 \text{ m} = (-20.0 \text{ m/s}) \sin(8.00^\circ) t' - \frac{1}{2} (9.80 \text{ m/s}^2) t'^2$$

which yields  $t' = 0.46 \text{ s}$ , and the range is

$$R' = (v_0 \cos \theta'_0) t' = (20.0 \text{ m/s}) \cos 8.0^\circ (0.46 \text{ s}) = 9.06 \text{ m}$$

Thus, the ball travels an extra distance of

$$\Delta R = R' - R = 9.06 \text{ m} - 5.71 \text{ m} = 3.35 \text{ m}$$



34. Although we could use Eq. 4-26 to find where it lands, we choose instead to work with Eq. 4-21 and Eq. 4-22 (for the soccer ball) since these will give information about where *and when* and these are also considered more fundamental than Eq. 4-26. With  $\Delta y = 0$ , we have

$$\Delta y = (v_0 \sin \theta_0) t - \frac{1}{2} g t^2 \Rightarrow t = \frac{(19.5 \text{ m/s}) \sin 45.0^\circ}{(9.80 \text{ m/s}^2) / 2} = 2.81 \text{ s.}$$

Then Eq. 4-21 yields  $\Delta x = (v_0 \cos \theta_0) t = 38.7 \text{ m}$ . Thus, using Eq. 4-8, the player must have an average velocity of

$$\vec{v}_{\text{avg}} = \frac{\Delta \vec{r}}{\Delta t} = \frac{(38.7 \text{ m}) \hat{i} - (55 \text{ m}) \hat{i}}{2.81 \text{ s}} = (-5.8 \text{ m/s}) \hat{i}$$

which means his average speed (assuming he ran in only one direction) is 5.8 m/s.

35. We adopt the positive direction choices used in the textbook so that equations such as Eq. 4-22 are directly applicable. The coordinate origin is at its initial position (where it is launched). At maximum height, we observe  $v_y = 0$  and denote  $v_x = v$  (which is also equal to  $v_{0x}$ ). In this notation, we have  $v_0 = 5v$ . Next, we observe  $v_0 \cos \theta_0 = v_{0x} = v$ , so that we arrive at an equation (where  $v \neq 0$  cancels) which can be solved for  $\theta_0$ :

$$(5v) \cos \theta_0 = v \Rightarrow \theta_0 = \cos^{-1} \left( \frac{1}{5} \right) = 78.5^\circ.$$

36. (a) Solving the quadratic equation Eq. 4-22:

$$y - y_0 = (v_0 \sin \theta_0) t - \frac{1}{2} g t^2 \Rightarrow 0 - 2.160 \text{ m} = (15.00 \text{ m/s}) \sin(45.00^\circ) t - \frac{1}{2} (9.800 \text{ m/s}^2) t^2$$

the total travel time of the shot in the air is found to be  $t = 2.352 \text{ s}$ . Therefore, the horizontal distance traveled is

$$R = (v_0 \cos \theta_0) t = (15.00 \text{ m/s}) \cos 45.00^\circ (2.352 \text{ s}) = 24.95 \text{ m}.$$

(b) Using the procedure outlined in (a) but for  $\theta_0 = 42.00^\circ$ , we have

$$y - y_0 = (v_0 \sin \theta_0) t - \frac{1}{2} g t^2 \Rightarrow 0 - 2.160 \text{ m} = (15.00 \text{ m/s}) \sin(42.00^\circ) t - \frac{1}{2} (9.800 \text{ m/s}^2) t^2$$

and the total travel time is  $t = 2.245 \text{ s}$ . This gives

$$R = (v_0 \cos \theta_0) t = (15.00 \text{ m/s}) \cos 42.00^\circ (2.245 \text{ s}) = 25.02 \text{ m}.$$

37. We designate the given velocity  $\vec{v} = (7.6 \text{ m/s})\hat{i} + (6.1 \text{ m/s})\hat{j}$  as  $\vec{v}_1$  – as opposed to the velocity when it reaches the max height  $\vec{v}_2$  or the velocity when it returns to the ground  $\vec{v}_3$  – and take  $\vec{v}_0$  as the launch velocity, as usual. The origin is at its launch point on the ground.

(a) Different approaches are available, but since it will be useful (for the rest of the problem) to first find the initial  $y$  velocity, that is how we will proceed. Using Eq. 2-16, we have

$$v_{1y}^2 = v_{0y}^2 - 2g\Delta y \Rightarrow (6.1 \text{ m/s})^2 = v_{0y}^2 - 2(9.8 \text{ m/s}^2)(9.1 \text{ m})$$

which yields  $v_{0y} = 14.7 \text{ m/s}$ . Knowing that  $v_{2y}$  must equal 0, we use Eq. 2-16 again but now with  $\Delta y = h$  for the maximum height:

$$v_{2y}^2 = v_{0y}^2 - 2gh \Rightarrow 0 = (14.7 \text{ m/s})^2 - 2(9.8 \text{ m/s}^2)h$$

which yields  $h = 11 \text{ m}$ .

(b) Recalling the derivation of Eq. 4-26, but using  $v_{0y}$  for  $v_0 \sin \theta_0$  and  $v_{0x}$  for  $v_0 \cos \theta_0$ , we have

$$0 = v_{0y}t - \frac{1}{2}gt^2, \quad R = v_{0x}t$$

which leads to  $R = 2v_{0x}v_{0y}/g$ . Noting that  $v_{0x} = v_{1x} = 7.6 \text{ m/s}$ , we plug in values and obtain

$$R = 2(7.6 \text{ m/s})(14.7 \text{ m/s})/(9.8 \text{ m/s}^2) = 23 \text{ m}.$$

(c) Since  $v_{3x} = v_{1x} = 7.6 \text{ m/s}$  and  $v_{3y} = -v_{0y} = -14.7 \text{ m/s}$ , we have

$$v_3 = \sqrt{v_{3x}^2 + v_{3y}^2} = \sqrt{(7.6 \text{ m/s})^2 + (-14.7 \text{ m/s})^2} = 17 \text{ m/s}.$$

(d) The angle (measured from horizontal) for  $\vec{v}_3$  is one of these possibilities:

$$\tan^{-1}\left(\frac{-14.7 \text{ m}}{7.6 \text{ m}}\right) = -63^\circ \text{ or } 117^\circ$$

where we settle on the first choice ( $-63^\circ$ , which is equivalent to  $297^\circ$ ) since the signs of its components imply that it is in the fourth quadrant.

38. We adopt the positive direction choices used in the textbook so that equations such as Eq. 4-22 are directly applicable. The coordinate origin is at the release point (the initial position for the ball as it begins projectile motion in the sense of §4-5), and we let  $\theta_0$  be the angle of throw (shown in the figure). Since the horizontal component of the velocity of the ball is  $v_x = v_0 \cos 40.0^\circ$ , the time it takes for the ball to hit the wall is

$$t = \frac{\Delta x}{v_x} = \frac{22.0 \text{ m}}{(25.0 \text{ m/s}) \cos 40.0^\circ} = 1.15 \text{ s}.$$

(a) The vertical distance is

$$\Delta y = (v_0 \sin \theta_0)t - \frac{1}{2}gt^2 = (25.0 \text{ m/s}) \sin 40.0^\circ (1.15 \text{ s}) - \frac{1}{2}(9.80 \text{ m/s}^2)(1.15 \text{ s})^2 = 12.0 \text{ m}.$$

(b) The horizontal component of the velocity when it strikes the wall does not change from its initial value:  $v_x = v_0 \cos 40.0^\circ = 19.2 \text{ m/s}$ .

(c) The vertical component becomes (using Eq. 4-23)

$$v_y = v_0 \sin \theta_0 - gt = (25.0 \text{ m/s}) \sin 40.0^\circ - (9.80 \text{ m/s}^2)(1.15 \text{ s}) = 4.80 \text{ m/s}.$$

(d) Since  $v_y > 0$  when the ball hits the wall, it has not reached the highest point yet.

39. We adopt the positive direction choices used in the textbook so that equations such as Eq. 4-22 are directly applicable. The coordinate origin is at the end of the rifle (the initial point for the bullet as it begins projectile motion in the sense of § 4-5), and we let  $\theta_0$  be the firing angle. If the target is a distance  $d$  away, then its coordinates are  $x = d$ ,  $y = 0$ . The projectile motion equations lead to  $d = v_0 \cos \theta_0$  and  $0 = v_0 t \sin \theta_0 - \frac{1}{2} g t^2$ . Eliminating  $t$  leads to  $2v_0^2 \sin \theta_0 \cos \theta_0 - gd = 0$ . Using  $\sin \theta_0 \cos \theta_0 = \frac{1}{2} \sin(2\theta_0)$ , we obtain

$$v_0^2 \sin(2\theta_0) = gd \Rightarrow \sin(2\theta_0) = \frac{gd}{v_0^2} = \frac{(9.80 \text{ m/s}^2)(45.7 \text{ m})}{(460 \text{ m/s})^2}$$

which yields  $\sin(2\theta_0) = 2.11 \times 10^{-3}$  and consequently  $\theta_0 = 0.0606^\circ$ . If the gun is aimed at a point a distance  $\ell$  above the target, then  $\tan \theta_0 = \ell/d$  so that

$$\ell = d \tan \theta_0 = (45.7 \text{ m}) \tan(0.0606^\circ) = 0.0484 \text{ m} = 4.84 \text{ cm}.$$

40. We adopt the positive direction choices used in the textbook so that equations such as Eq. 4-22 are directly applicable. The initial velocity is horizontal so that  $v_{0y} = 0$  and  $v_{0x} = v_0 = 161 \text{ km/h}$ . Converting to SI units, this is  $v_0 = 44.7 \text{ m/s}$ .

(a) With the origin at the initial point (where the ball leaves the pitcher's hand), the  $y$  coordinate of the ball is given by  $y = -\frac{1}{2}gt^2$ , and the  $x$  coordinate is given by  $x = v_0t$ . From the latter equation, we have a simple proportionality between horizontal distance and time, which means the time to travel half the total distance is half the total time. Specifically, if  $x = 18.3/2 \text{ m}$ , then  $t = (18.3/2 \text{ m})/(44.7 \text{ m/s}) = 0.205 \text{ s}$ .

(b) And the time to travel the next  $18.3/2 \text{ m}$  must also be  $0.205 \text{ s}$ . It can be useful to write the horizontal equation as  $\Delta x = v_0\Delta t$  in order that this result can be seen more clearly.

(c) From  $y = -\frac{1}{2}gt^2$ , we see that the ball has reached the height of  $|\frac{1}{2}(9.80 \text{ m/s}^2)(0.205 \text{ s})^2| = 0.205 \text{ m}$  at the moment the ball is halfway to the batter.

(d) The ball's height when it reaches the batter is  $-\frac{1}{2}(9.80 \text{ m/s}^2)(0.409 \text{ s})^2 = -0.820 \text{ m}$ , which, when subtracted from the previous result, implies it has fallen another  $0.615 \text{ m}$ . Since the value of  $y$  is not simply proportional to  $t$ , we do not expect equal time-intervals to correspond to equal height-changes; in a physical sense, this is due to the fact that the initial  $y$ -velocity for the first half of the motion is not the same as the "initial"  $y$ -velocity for the second half of the motion.

41. Following the hint, we have the time-reversed problem with the ball thrown from the ground, towards the right, at  $60^\circ$  measured counterclockwise from a rightward axis. We see in this time-reversed situation that it is convenient to use the familiar coordinate system with  $+x$  as *rightward* and with positive angles measured counterclockwise.

(a) The  $x$ -equation (with  $x_0 = 0$  and  $x = 25.0$  m) leads to

$$25.0 \text{ m} = (v_0 \cos 60.0^\circ)(1.50 \text{ s}),$$

so that  $v_0 = 33.3$  m/s. And with  $y_0 = 0$ , and  $y = h > 0$  at  $t = 1.50$  s, we have  $y - y_0 = v_{0y}t - \frac{1}{2}gt^2$  where  $v_{0y} = v_0 \sin 60.0^\circ$ . This leads to  $h = 32.3$  m.

(b) We have

$$\begin{aligned} v_x &= v_{0x} = (33.3 \text{ m/s})\cos 60.0^\circ = 16.7 \text{ m/s} \\ v_y &= v_{0y} - gt = (33.3 \text{ m/s})\sin 60.0^\circ - (9.80 \text{ m/s}^2)(1.50 \text{ s}) = 14.2 \text{ m/s}. \end{aligned}$$

The magnitude of  $\vec{v}$  is given by

$$|\vec{v}| = \sqrt{v_x^2 + v_y^2} = \sqrt{(16.7 \text{ m/s})^2 + (14.2 \text{ m/s})^2} = 21.9 \text{ m/s}.$$

(c) The angle is

$$\theta = \tan^{-1}\left(\frac{v_y}{v_x}\right) = \tan^{-1}\left(\frac{14.2 \text{ m/s}}{16.7 \text{ m/s}}\right) = 40.4^\circ.$$

(d) We interpret this result (“undoing” the time reversal) as an initial velocity (from the edge of the building) of magnitude 21.9 m/s with angle (down from leftward) of  $40.4^\circ$ .



42. In this projectile motion problem, we have  $v_0 = v_x = \text{constant}$ , and what is plotted is  $v = \sqrt{v_x^2 + v_y^2}$ . We infer from the plot that at  $t = 2.5$  s, the ball reaches its maximum height, where  $v_y = 0$ . Therefore, we infer from the graph that  $v_x = 19$  m/s.

(a) During  $t = 5$  s, the horizontal motion is  $x - x_0 = v_x t = 95$  m.

(b) Since  $\sqrt{(19 \text{ m/s})^2 + v_{0y}^2} = 31 \text{ m/s}$  (the first point on the graph), we find  $v_{0y} = 24.5$  m/s. Thus, with  $t = 2.5$  s, we can use  $y_{\text{max}} - y_0 = v_{0y}t - \frac{1}{2}gt^2$  or  $v_y^2 = 0 = v_{0y}^2 - 2g(y_{\text{max}} - y_0)$ , or  $y_{\text{max}} - y_0 = \frac{1}{2}(v_y + v_{0y})t$  to solve. Here we will use the latter:

$$y_{\text{max}} - y_0 = \frac{1}{2}(v_y + v_{0y})t \Rightarrow y_{\text{max}} = \frac{1}{2}(0 + 24.5 \text{ m/s})(2.5 \text{ s}) = 31 \text{ m}$$

where we have taken  $y_0 = 0$  as the ground level.

43. (a) Let  $m = \frac{d_2}{d_1} = 0.600$  be the slope of the ramp, so  $y = mx$  there. We choose our coordinate origin at the point of launch and use Eq. 4-25. Thus,

$$y = \tan(50.0^\circ)x - \frac{(9.80 \text{ m/s}^2)x^2}{2(10.0 \text{ m/s})^2(\cos 50.0^\circ)^2} = 0.600x$$

which yields  $x = 4.99 \text{ m}$ . This is less than  $d_1$  so the ball *does* land on the ramp.

(b) Using the value of  $x$  found in part (a), we obtain  $y = mx = 2.99 \text{ m}$ . Thus, the Pythagorean theorem yields a displacement magnitude of  $\sqrt{x^2 + y^2} = 5.82 \text{ m}$ .

(c) The angle is, of course, the angle of the ramp:  $\tan^{-1}(m) = 31.0^\circ$ .

44. (a) Using the fact that the person (as the projectile) reaches the maximum height over the middle wheel located at  $x = 23 \text{ m} + (23/2) \text{ m} = 34.5 \text{ m}$ , we can deduce the initial launch speed from Eq. 4-26:

$$x = \frac{R}{2} = \frac{v_0^2 \sin 2\theta_0}{2g} \Rightarrow v_0 = \sqrt{\frac{2gx}{\sin 2\theta_0}} = \sqrt{\frac{2(9.8 \text{ m/s}^2)(34.5 \text{ m})}{\sin(2 \cdot 53^\circ)}} = 26.5 \text{ m/s}.$$

Upon substituting the value to Eq. 4-25, we obtain

$$y = y_0 + x \tan \theta_0 - \frac{gx^2}{2v_0^2 \cos^2 \theta_0} = 3.0 \text{ m} + (23 \text{ m}) \tan 53^\circ - \frac{(9.8 \text{ m/s}^2)(23 \text{ m})^2}{2(26.5 \text{ m/s})^2 (\cos 53^\circ)^2} = 23.3 \text{ m}.$$

Since the height of the wheel is  $h_w = 18 \text{ m}$ , the clearance over the first wheel is  $\Delta y = y - h_w = 23.3 \text{ m} - 18 \text{ m} = 5.3 \text{ m}$ .

(b) The height of the person when he is directly above the second wheel can be found by solving Eq. 4-24. With the second wheel located at  $x = 23 \text{ m} + (23/2) \text{ m} = 34.5 \text{ m}$ , we have

$$y = y_0 + x \tan \theta_0 - \frac{gx^2}{2v_0^2 \cos^2 \theta_0} = 3.0 \text{ m} + (34.5 \text{ m}) \tan 53^\circ - \frac{(9.8 \text{ m/s}^2)(34.5 \text{ m})^2}{2(26.52 \text{ m/s})^2 (\cos 53^\circ)^2} = 25.9 \text{ m}.$$

Therefore, the clearance over the second wheel is  $\Delta y = y - h_w = 25.9 \text{ m} - 18 \text{ m} = 7.9 \text{ m}$ .

(c) The location of the center of the net is given by

$$0 = y - y_0 = x \tan \theta_0 - \frac{gx^2}{2v_0^2 \cos^2 \theta_0} \Rightarrow x = \frac{v_0^2 \sin 2\theta_0}{g} = \frac{(26.52 \text{ m/s})^2 \sin(2 \cdot 53^\circ)}{9.8 \text{ m/s}^2} = 69 \text{ m}.$$

45. Using the information given, the position of the insect is given by (with the Archer fish at the origin)

$$x = d \cos \phi = (0.900 \text{ m}) \cos 36.0^\circ = 0.728 \text{ m}$$

$$y = d \sin \phi = (0.900 \text{ m}) \sin 36.0^\circ = 0.529 \text{ m}$$

Since  $y$  corresponds to the maximum height of the parabolic trajectory (see Problem 4-30):  $y = y_{\max} = v_0^2 \sin^2 \theta_0 / 2g$ , the launch angle is found to be

$$\theta_0 = \sin^{-1} \left( \sqrt{\frac{2gy}{v_0^2}} \right) = \sin^{-1} \left( \sqrt{\frac{2(9.8 \text{ m/s}^2)(0.529 \text{ m})}{(3.56 \text{ m/s})^2}} \right) = \sin^{-1}(0.9044) = 64.8^\circ$$

46. Following the hint, we have the time-reversed problem with the ball thrown from the roof, towards the left, at  $60^\circ$  measured clockwise from a leftward axis. We see in this time-reversed situation that it is convenient to take  $+x$  as *leftward* with positive angles measured clockwise. Lengths are in meters and time is in seconds.

(a) With  $y_0 = 20.0$  m, and  $y = 0$  at  $t = 4.00$  s, we have  $y - y_0 = v_{0y}t - \frac{1}{2}gt^2$  where  $v_{0y} = v_0 \sin 60^\circ$ . This leads to  $v_0 = 16.9$  m/s. This plugs into the  $x$ -equation  $x - x_0 = v_{0x}t$  (with  $x_0 = 0$  and  $x = d$ ) to produce  $d = (16.9 \text{ m/s})\cos 60^\circ(4.00 \text{ s}) = 33.7$  m.

(b) We have

$$v_x = v_{0x} = (16.9 \text{ m/s})\cos 60.0^\circ = 8.43 \text{ m/s}$$

$$v_y = v_{0y} - gt = (16.9 \text{ m/s})\sin 60.0^\circ - (9.80 \text{ m/s}^2)(4.00 \text{ s}) = -24.6 \text{ m/s}.$$

The magnitude of  $\vec{v}$  is  $|\vec{v}| = \sqrt{v_x^2 + v_y^2} = \sqrt{(8.43 \text{ m/s})^2 + (-24.6 \text{ m/s})^2} = 26.0 \text{ m/s}.$

(c) The angle relative to horizontal is

$$\theta = \tan^{-1}\left(\frac{v_y}{v_x}\right) = \tan^{-1}\left(\frac{-24.6 \text{ m/s}}{8.43 \text{ m/s}}\right) = -71.1^\circ.$$

We may convert the result from rectangular components to magnitude-angle representation:

$$\vec{v} = (8.43, -24.6) \rightarrow (26.0 \angle -71.1^\circ)$$

and we now interpret our result (“undoing” the time reversal) as an initial velocity of magnitude 26.0 m/s with angle (up from rightward) of  $71.1^\circ$ .

47. We adopt the positive direction choices used in the textbook so that equations such as Eq. 4-22 are directly applicable. The coordinate origin is at ground level directly below impact point between bat and ball. The *Hint* given in the problem is important, since it provides us with enough information to find  $v_0$  directly from Eq. 4-26.

(a) We want to know how high the ball is from the ground when it is at  $x = 97.5$  m, which requires knowing the initial velocity. Using the range information and  $\theta_0 = 45^\circ$ , we use Eq. 4-26 to solve for  $v_0$ :

$$v_0 = \sqrt{\frac{gR}{\sin 2\theta_0}} = \sqrt{\frac{(9.8 \text{ m/s}^2)(107 \text{ m})}{1}} = 32.4 \text{ m/s}.$$

Thus, Eq. 4-21 tells us the time it is over the fence:

$$t = \frac{x}{v_0 \cos \theta_0} = \frac{97.5 \text{ m}}{(32.4 \text{ m/s}) \cos 45^\circ} = 4.26 \text{ s}.$$

At this moment, the ball is at a height (above the ground) of

$$y = y_0 + (v_0 \sin \theta_0)t - \frac{1}{2}gt^2 = 9.88 \text{ m}$$

which implies it does indeed clear the 7.32 m high fence.

(b) At  $t = 4.26$  s, the center of the ball is  $9.88 \text{ m} - 7.32 \text{ m} = 2.56 \text{ m}$  above the fence.

48. Using the fact that  $v_y = 0$  when the player is at the maximum height  $y_{\max}$ , the amount of time it takes to reach  $y_{\max}$  can be solved by using Eq. 4-23:

$$0 = v_y = v_0 \sin \theta_0 - gt \Rightarrow t_{\max} = \frac{v_0 \sin \theta_0}{g}.$$

Substituting the above expression into Eq. 4-22, we find the maximum height to be

$$y_{\max} = (v_0 \sin \theta_0) t_{\max} - \frac{1}{2} g t_{\max}^2 = v_0 \sin \theta_0 \left( \frac{v_0 \sin \theta_0}{g} \right) - \frac{1}{2} g \left( \frac{v_0 \sin \theta_0}{g} \right)^2 = \frac{v_0^2 \sin^2 \theta_0}{2g}.$$

To find the time when the player is at  $y = y_{\max} / 2$ , we solve the quadratic equation given in Eq. 4-22:

$$y = \frac{1}{2} y_{\max} = \frac{v_0^2 \sin^2 \theta_0}{4g} = (v_0 \sin \theta_0) t - \frac{1}{2} g t^2 \Rightarrow t_{\pm} = \frac{(2 \pm \sqrt{2}) v_0 \sin \theta_0}{2g}.$$

With  $t = t_-$  (for ascending), the amount of time the player spends at a height  $y \geq y_{\max} / 2$  is

$$\Delta t = t_{\max} - t_- = \frac{v_0 \sin \theta_0}{g} - \frac{(2 - \sqrt{2}) v_0 \sin \theta_0}{2g} = \frac{v_0 \sin \theta_0}{\sqrt{2}g} = \frac{t_{\max}}{\sqrt{2}} \Rightarrow \frac{\Delta t}{t_{\max}} = \frac{1}{\sqrt{2}} = 0.707.$$

Therefore, the player spends about 70.7% of the time in the upper half of the jump. Note that the ratio  $\Delta t / t_{\max}$  is independent of  $v_0$  and  $\theta_0$ , even though  $\Delta t$  and  $t_{\max}$  depend on these quantities.

49. (a) The skier jumps up at an angle of  $\theta_0 = 9.0^\circ$  up from the horizontal and thus returns to the launch level with his velocity vector  $9.0^\circ$  below the horizontal. With the snow surface making an angle of  $\alpha = 11.3^\circ$  (downward) with the horizontal, the angle between the slope and the velocity vector is  $\phi = \alpha - \theta_0 = 11.3^\circ - 9.0^\circ = 2.3^\circ$ .

(b) Suppose the skier lands at a distance  $d$  down the slope. Using Eq. 4-25 with  $x = d \cos \alpha$  and  $y = -d \sin \alpha$  (the edge of the track being the origin), we have

$$-d \sin \alpha = d \cos \alpha \tan \theta_0 - \frac{g(d \cos \alpha)^2}{2v_0^2 \cos^2 \theta_0}.$$

Solving for  $d$ , we obtain

$$\begin{aligned} d &= \frac{2v_0^2 \cos^2 \theta_0}{g \cos^2 \alpha} (\cos \alpha \tan \theta_0 + \sin \alpha) = \frac{2v_0^2 \cos \theta_0}{g \cos^2 \alpha} (\cos \alpha \sin \theta_0 + \cos \theta_0 \sin \alpha) \\ &= \frac{2v_0^2 \cos \theta_0}{g \cos^2 \alpha} \sin(\theta_0 + \alpha). \end{aligned}$$

Substituting the values given, we find

$$d = \frac{2(10 \text{ m/s})^2 \cos(9.0^\circ)}{(9.8 \text{ m/s}^2) \cos^2(11.3^\circ)} \sin(9.0^\circ + 11.3^\circ) = 7.27 \text{ m}.$$

which gives

$$y = -d \sin \alpha = -(7.27 \text{ m}) \sin(11.3^\circ) = -1.42 \text{ m}.$$

Therefore, at landing the skier is approximately 1.4 m below the launch level.

(c) The time it takes for the skier to land is

$$t = \frac{x}{v_x} = \frac{d \cos \alpha}{v_0 \cos \theta_0} = \frac{(7.27 \text{ m}) \cos(11.3^\circ)}{(10 \text{ m/s}) \cos(9.0^\circ)} = 0.72 \text{ s}.$$

Using Eq. 4-23, the  $x$ - and  $y$ -components of the velocity at landing are

$$\begin{aligned} v_x &= v_0 \cos \theta_0 = (10 \text{ m/s}) \cos(9.0^\circ) = 9.9 \text{ m/s} \\ v_y &= v_0 \sin \theta_0 - gt = (10 \text{ m/s}) \sin(9.0^\circ) - (9.8 \text{ m/s}^2)(0.72 \text{ s}) = -5.5 \text{ m/s} \end{aligned}$$

Thus, the direction of travel at landing is

$$\theta = \tan^{-1} \left( \frac{v_y}{v_x} \right) = \tan^{-1} \left( \frac{-5.5 \text{ m/s}}{9.9 \text{ m/s}} \right) = -29.1^\circ.$$

or  $29.1^\circ$  below the horizontal. The result implies that the angle between the skier's path and the slope is  $\phi = 29.1^\circ - 11.3^\circ = 17.8^\circ$ , or approximately  $18^\circ$  to two significant figures.



50. From Eq. 4-21, we find  $t = x / v_{0x}$ . Then Eq. 4-23 leads to

$$v_y = v_{0y} - gt = v_{0y} - \frac{gx}{v_{0x}}.$$

Since the slope of the graph is  $-0.500$ , we conclude  $\frac{g}{v_{0x}} = \frac{1}{2} \Rightarrow v_{0x} = 19.6 \text{ m/s}$ . And from the “y intercept” of the graph, we find  $v_{0y} = 5.00 \text{ m/s}$ . Consequently,  $\theta_0 = \tan^{-1}(v_{0y} / v_{0x}) = 14.3^\circ$ .

51. We adopt the positive direction choices used in the textbook so that equations such as Eq. 4-22 are directly applicable. The coordinate origin is at the point where the ball is kicked. We use  $x$  and  $y$  to denote the coordinates of ball at the goalpost, and try to find the kicking angle(s)  $\theta_0$  so that  $y = 3.44$  m when  $x = 50$  m. Writing the kinematic equations for projectile motion:

$$x = v_0 \cos \theta_0, \quad y = v_0 t \sin \theta_0 - \frac{1}{2} g t^2,$$

we see the first equation gives  $t = x/v_0 \cos \theta_0$ , and when this is substituted into the second the result is

$$y = x \tan \theta_0 - \frac{g x^2}{2 v_0^2 \cos^2 \theta_0}.$$

One may solve this by trial and error: systematically trying values of  $\theta_0$  until you find the two that satisfy the equation. A little manipulation, however, will give an algebraic solution: Using the trigonometric identity  $1 / \cos^2 \theta_0 = 1 + \tan^2 \theta_0$ , we obtain

$$\frac{1}{2} \frac{g x^2}{v_0^2} \tan^2 \theta_0 - x \tan \theta_0 + y + \frac{1}{2} \frac{g x^2}{v_0^2} = 0$$

which is a second-order equation for  $\tan \theta_0$ . To simplify writing the solution, we denote

$$c = \frac{1}{2} g x^2 / v_0^2 = \frac{1}{2} (9.80 \text{ m/s}^2) (50 \text{ m})^2 / (25 \text{ m/s})^2 = 19.6 \text{ m}.$$

Then the second-order equation becomes  $c \tan^2 \theta_0 - x \tan \theta_0 + y + c = 0$ . Using the quadratic formula, we obtain its solution(s).

$$\tan \theta_0 = \frac{x \pm \sqrt{x^2 - 4(y+c)c}}{2c} = \frac{50 \text{ m} \pm \sqrt{(50 \text{ m})^2 - 4(3.44 \text{ m} + 19.6 \text{ m})(19.6 \text{ m})}}{2(19.6 \text{ m})}.$$

The two solutions are given by  $\tan \theta_0 = 1.95$  and  $\tan \theta_0 = 0.605$ . The corresponding (first-quadrant) angles are  $\theta_0 = 63^\circ$  and  $\theta_0 = 31^\circ$ . Thus,

(a) The smallest elevation angle is  $\theta_0 = 31^\circ$ , and

(b) The greatest elevation angle is  $\theta_0 = 63^\circ$ .

If kicked at any angle between these two, the ball will travel above the cross bar on the goalposts.

52. For  $\Delta y = 0$ , Eq. 4-22 leads to  $t = 2v_o \sin \theta_o / g$ , which immediately implies  $t_{\max} = 2v_o / g$  (which occurs for the “straight up” case:  $\theta_o = 90^\circ$ ). Thus,

$$\frac{1}{2} t_{\max} = v_o / g \Rightarrow \frac{1}{2} = \sin \theta_o.$$

Therefore, the half-maximum-time flight is at angle  $\theta_o = 30.0^\circ$ . Since the least speed occurs at the top of the trajectory, which is where the velocity is simply the  $x$ -component of the initial velocity ( $v_o \cos \theta_o = v_o \cos 30^\circ$  for the half-maximum-time flight), then we need to refer to the graph in order to find  $v_o$  – in order that we may complete the solution. In the graph, we note that the range is 240 m when  $\theta_o = 45.0^\circ$ . Eq. 4-26 then leads to  $v_o = 48.5$  m/s. The answer is thus  $(48.5 \text{ m/s}) \cos 30.0^\circ = 42.0$  m/s.

53. We denote  $h$  as the height of a step and  $w$  as the width. To hit step  $n$ , the ball must fall a distance  $nh$  and travel horizontally a distance between  $(n - 1)w$  and  $nw$ . We take the origin of a coordinate system to be at the point where the ball leaves the top of the stairway, and we choose the  $y$  axis to be positive in the upward direction. The coordinates of the ball at time  $t$  are given by  $x = v_{0x}t$  and  $y = -\frac{1}{2}gt^2$  (since  $v_{0y} = 0$ ). We equate  $y$  to  $-nh$  and solve for the time to reach the level of step  $n$ :

$$t = \sqrt{\frac{2nh}{g}}.$$

The  $x$  coordinate then is

$$x = v_{0x}\sqrt{\frac{2nh}{g}} = (1.52 \text{ m/s})\sqrt{\frac{2n(0.203 \text{ m})}{9.8 \text{ m/s}^2}} = (0.309 \text{ m})\sqrt{n}.$$

The method is to try values of  $n$  until we find one for which  $x/w$  is less than  $n$  but greater than  $n - 1$ . For  $n = 1$ ,  $x = 0.309 \text{ m}$  and  $x/w = 1.52$ , which is greater than  $n$ . For  $n = 2$ ,  $x = 0.437 \text{ m}$  and  $x/w = 2.15$ , which is also greater than  $n$ . For  $n = 3$ ,  $x = 0.535 \text{ m}$  and  $x/w = 2.64$ . Now, this is less than  $n$  and greater than  $n - 1$ , so the ball hits the third step.

54. We apply Eq. 4-21, Eq. 4-22 and Eq. 4-23.

(a) From  $\Delta x = v_{0x}t$ , we find  $v_{0x} = 40 \text{ m} / 2 \text{ s} = 20 \text{ m/s}$ .

(b) From  $\Delta y = v_{0y}t - \frac{1}{2}gt^2$ , we find  $v_{0y} = \left(53 \text{ m} + \frac{1}{2}(9.8 \text{ m/s}^2)(2 \text{ s})^2\right) / 2 = 36 \text{ m/s}$ .

(c) From  $v_y = v_{0y} - gt'$  with  $v_y = 0$  as the condition for maximum height, we obtain  $t' = (36 \text{ m/s}) / (9.8 \text{ m/s}^2) = 3.7 \text{ s}$ . During that time the  $x$ -motion is constant, so  $x' - x_0 = (20 \text{ m/s})(3.7 \text{ s}) = 74 \text{ m}$ .

55. Let  $y_0 = h_0 = 1.00$  m at  $x_0 = 0$  when the ball is hit. Let  $y_1 = h$  (the height of the wall) and  $x_1$  describe the point where it first rises above the wall one second after being hit; similarly,  $y_2 = h$  and  $x_2$  describe the point where it passes back down behind the wall four seconds later. And  $y_f = 1.00$  m at  $x_f = R$  is where it is caught. Lengths are in meters and time is in seconds.

(a) Keeping in mind that  $v_x$  is constant, we have  $x_2 - x_1 = 50.0$  m  $= v_{1x}$  (4.00 s), which leads to  $v_{1x} = 12.5$  m/s. Thus, applied to the full six seconds of motion:

$$x_f - x_0 = R = v_x(6.00 \text{ s}) = 75.0 \text{ m}.$$

(b) We apply  $y - y_0 = v_{0y}t - \frac{1}{2}gt^2$  to the motion above the wall,

$$y_2 - y_1 = 0 = v_{1y}(4.00 \text{ s}) - \frac{1}{2}g(4.00 \text{ s})^2$$

and obtain  $v_{1y} = 19.6$  m/s. One second earlier, using  $v_{1y} = v_{0y} - g(1.00 \text{ s})$ , we find  $v_{0y} = 29.4$  m/s. Therefore, the velocity of the ball just after being hit is

$$\vec{v} = v_{0x}\hat{i} + v_{0y}\hat{j} = (12.5 \text{ m/s})\hat{i} + (29.4 \text{ m/s})\hat{j}$$

Its magnitude is  $|\vec{v}| = \sqrt{(12.5 \text{ m/s})^2 + (29.4 \text{ m/s})^2} = 31.9 \text{ m/s}$ .

(c) The angle is

$$\theta = \tan^{-1}\left(\frac{v_y}{v_x}\right) = \tan^{-1}\left(\frac{29.4 \text{ m/s}}{12.5 \text{ m/s}}\right) = 67.0^\circ.$$

We interpret this result as a velocity of magnitude 31.9 m/s, with angle (up from rightward) of  $67.0^\circ$ .

(d) During the first 1.00 s of motion,  $y = y_0 + v_{0y}t - \frac{1}{2}gt^2$  yields

$$h = 1.0 \text{ m} + (29.4 \text{ m/s})(1.00 \text{ s}) - \frac{1}{2}(9.8 \text{ m/s}^2)(1.00 \text{ s})^2 = 25.5 \text{ m}.$$

56. (a) During constant-speed circular motion, the velocity vector is perpendicular to the acceleration vector at every instant. Thus,  $\vec{v} \cdot \vec{a} = 0$ .

(b) The acceleration in this vector, at every instant, points towards the center of the circle, whereas the position vector points from the center of the circle to the object in motion.

Thus, the angle between  $\vec{r}$  and  $\vec{a}$  is  $180^\circ$  at every instant, so  $\vec{r} \times \vec{a} = 0$ .

57. (a) Since the wheel completes 5 turns each minute, its period is one-fifth of a minute, or 12 s.

(b) The magnitude of the centripetal acceleration is given by  $a = v^2/R$ , where  $R$  is the radius of the wheel, and  $v$  is the speed of the passenger. Since the passenger goes a distance  $2\pi R$  for each revolution, his speed is

$$v = \frac{2\pi(15 \text{ m})}{12 \text{ s}} = 7.85 \text{ m/s}$$

and his centripetal acceleration is  $a = \frac{(7.85 \text{ m/s})^2}{15 \text{ m}} = 4.1 \text{ m/s}^2$ .

(c) When the passenger is at the highest point, his centripetal acceleration is downward, toward the center of the orbit.

(d) At the lowest point, the centripetal acceleration is  $a = 4.1 \text{ m/s}^2$ , same as part (b).

(e) The direction is up, toward the center of the orbit.



58. The magnitude of the acceleration is

$$a = \frac{v^2}{r} = \frac{(10 \text{ m/s})^2}{25 \text{ m}} = 4.0 \text{ m/s}^2.$$

59. We apply Eq. 4-35 to solve for speed  $v$  and Eq. 4-34 to find centripetal acceleration  $a$ .

(a)  $v = 2\pi r/T = 2\pi(20 \text{ km})/1.0 \text{ s} = 126 \text{ km/s} = 1.3 \times 10^5 \text{ m/s}$ .

(b) The magnitude of the acceleration is

$$a = \frac{v^2}{r} = \frac{(126 \text{ km/s})^2}{20 \text{ km}} = 7.9 \times 10^5 \text{ m/s}^2.$$

(c) Clearly, both  $v$  and  $a$  will increase if  $T$  is reduced.

60. We apply Eq. 4-35 to solve for speed  $v$  and Eq. 4-34 to find acceleration  $a$ .

(a) Since the radius of Earth is  $6.37 \times 10^6$  m, the radius of the satellite orbit is

$$r = (6.37 \times 10^6 + 640 \times 10^3) \text{ m} = 7.01 \times 10^6 \text{ m}.$$

Therefore, the speed of the satellite is

$$v = \frac{2\pi r}{T} = \frac{2\pi(7.01 \times 10^6 \text{ m})}{(98.0 \text{ min})(60 \text{ s/min})} = 7.49 \times 10^3 \text{ m/s}.$$

(b) The magnitude of the acceleration is

$$a = \frac{v^2}{r} = \frac{(7.49 \times 10^3 \text{ m/s})^2}{7.01 \times 10^6 \text{ m}} = 8.00 \text{ m/s}^2.$$

61. The magnitude of centripetal acceleration ( $a = v^2/r$ ) and its direction (towards the center of the circle) form the basis of this problem.

(a) If a passenger at this location experiences  $\vec{a} = 1.83 \text{ m/s}^2$  east, then the center of the circle is *east* of this location. The distance is  $r = v^2/a = (3.66 \text{ m/s})^2/(1.83 \text{ m/s}^2) = 7.32 \text{ m}$ .

(b) Thus, relative to the center, the passenger at that moment is located 7.32 m toward the west.

(c) If the direction of  $\vec{a}$  experienced by the passenger is now *south*—indicating that the center of the merry-go-round is south of him, then relative to the center, the passenger at that moment is located 7.32 m toward the north.

62. (a) The circumference is  $c = 2\pi r = 2\pi(0.15 \text{ m}) = 0.94 \text{ m}$ .

(b) With  $T = (60 \text{ s})/1200 = 0.050 \text{ s}$ , the speed is  $v = c/T = (0.94 \text{ m})/(0.050 \text{ s}) = 19 \text{ m/s}$ . This is equivalent to using Eq. 4-35.

(c) The magnitude of the acceleration is  $a = v^2/r = (19 \text{ m/s})^2/(0.15 \text{ m}) = 2.4 \times 10^3 \text{ m/s}^2$ .

(d) The period of revolution is  $(1200 \text{ rev/min})^{-1} = 8.3 \times 10^{-4} \text{ min}$  which becomes, in SI units,  $T = 0.050 \text{ s} = 50 \text{ ms}$ .

63. Since the period of a uniform circular motion is  $T = 2\pi r / v$ , where  $r$  is the radius and  $v$  is the speed, the centripetal acceleration can be written as

$$a = \frac{v^2}{r} = \frac{1}{r} \left( \frac{2\pi r}{T} \right)^2 = \frac{4\pi^2 r}{T^2}.$$

Based on this expression, we compare the (magnitudes) of the wallet and purse accelerations, and find their ratio is the ratio of  $r$  values. Therefore,  $a_{\text{wallet}} = 1.50 a_{\text{purse}}$ . Thus, the wallet acceleration vector is

$$a = 1.50[(2.00 \text{ m/s}^2)\hat{i} + (4.00 \text{ m/s}^2)\hat{j}] = (3.00 \text{ m/s}^2)\hat{i} + (6.00 \text{ m/s}^2)\hat{j}.$$

64. The fact that the velocity is in the  $+y$  direction, and the acceleration is in the  $+x$  direction at  $t_1 = 4.00$  s implies that the motion is clockwise. The position corresponds to the “9:00 position.” On the other hand, the position at  $t_2 = 10.0$  s is in the “6:00 position” since the velocity points in the  $-x$  direction and the acceleration is in the  $+y$  direction. The time interval  $\Delta t = 10.0 \text{ s} - 4.00 \text{ s} = 6.00 \text{ s}$  is equal to  $3/4$  of a period:

$$6.00 \text{ s} = \frac{3}{4}T \Rightarrow T = 8.00 \text{ s}.$$

Eq. 4-35 then yields

$$r = \frac{vT}{2\pi} = \frac{(3.00 \text{ m/s})(8.00 \text{ s})}{2\pi} = 3.82 \text{ m}.$$

(a) The  $x$  coordinate of the center of the circular path is  $x = 5.00 \text{ m} + 3.82 \text{ m} = 8.82 \text{ m}$ .

(b) The  $y$  coordinate of the center of the circular path is  $y = 6.00 \text{ m}$ .

In other words, the center of the circle is at  $(x, y) = (8.82 \text{ m}, 6.00 \text{ m})$ .

65. We first note that  $\vec{a}_1$  (the acceleration at  $t_1 = 2.00$  s) is perpendicular to  $\vec{a}_2$  (the acceleration at  $t_2 = 5.00$  s), by taking their scalar (dot) product.:

$$\vec{a}_1 \cdot \vec{a}_2 = [(6.00 \text{ m/s}^2)\hat{i} + (4.00 \text{ m/s}^2)\hat{j}] \cdot [(4.00 \text{ m/s}^2)\hat{i} + (-6.00 \text{ m/s}^2)\hat{j}] = 0.$$

Since the acceleration vectors are in the (negative) radial directions, then the two positions (at  $t_1$  and  $t_2$ ) are a quarter-circle apart (or three-quarters of a circle, depending on whether one measures clockwise or counterclockwise). A quick sketch leads to the conclusion that if the particle is moving counterclockwise (as the problem states) then it travels three-quarters of a circumference in moving from the position at time  $t_1$  to the position at time  $t_2$ . Letting  $T$  stand for the period, then  $t_2 - t_1 = 3.00 \text{ s} = 3T/4$ . This gives  $T = 4.00 \text{ s}$ . The magnitude of the acceleration is

$$a = \sqrt{a_x^2 + a_y^2} = \sqrt{(6.00 \text{ m/s}^2)^2 + (4.00 \text{ m/s}^2)^2} = 7.21 \text{ m/s}^2.$$

Using Eq. 4-34 and 4-35, we have  $a = 4\pi^2 r / T^2$ , which yields

$$r = \frac{aT^2}{4\pi^2} = \frac{(7.21 \text{ m/s}^2)(4.00 \text{ s})^2}{4\pi^2} = 2.92 \text{ m}.$$



66. When traveling in circular motion with constant speed, the instantaneous acceleration vector necessarily points towards the center. Thus, the center is “straight up” from the cited point.

(a) Since the center is “straight up” from (4.00 m, 4.00 m), the  $x$  coordinate of the center is 4.00 m.

(b) To find out “how far up” we need to know the radius. Using Eq. 4-34 we find

$$r = \frac{v^2}{a} = \frac{(5.00 \text{ m/s})^2}{12.5 \text{ m/s}^2} = 2.00 \text{ m}.$$

Thus, the  $y$  coordinate of the center is  $2.00 \text{ m} + 4.00 \text{ m} = 6.00 \text{ m}$ . Thus, the center may be written as  $(x, y) = (4.00 \text{ m}, 6.00 \text{ m})$ .

67. To calculate the centripetal acceleration of the stone, we need to know its speed during its circular motion (this is also its initial speed when it flies off). We use the kinematic equations of projectile motion (discussed in §4-6) to find that speed. Taking the +y direction to be upward and placing the origin at the point where the stone leaves its circular orbit, then the coordinates of the stone during its motion as a projectile are given by  $x = v_0 t$  and  $y = -\frac{1}{2} g t^2$  (since  $v_{0y} = 0$ ). It hits the ground at  $x = 10$  m and  $y = -2.0$  m. Formally solving the second equation for the time, we obtain  $t = \sqrt{-2y/g}$ , which we substitute into the first equation:

$$v_0 = x \sqrt{-\frac{g}{2y}} = (10 \text{ m}) \sqrt{-\frac{9.8 \text{ m/s}^2}{2(-2.0 \text{ m})}} = 15.7 \text{ m/s}.$$

Therefore, the magnitude of the centripetal acceleration is

$$a = \frac{v^2}{r} = \frac{(15.7 \text{ m/s})^2}{1.5 \text{ m}} = 160 \text{ m/s}^2.$$

68. We note that after three seconds have elapsed ( $t_2 - t_1 = 3.00$  s) the velocity (for this object in circular motion of period  $T$ ) is reversed; we infer that it takes three seconds to reach the opposite side of the circle. Thus,  $T = 2(3.00 \text{ s}) = 6.00$  s.

(a) Using Eq. 4-35,  $r = vT/2\pi$ , where  $v = \sqrt{(3.00 \text{ m/s})^2 + (4.00 \text{ m/s})^2} = 5.00 \text{ m/s}$ , we obtain  $r = 4.77 \text{ m}$ . The magnitude of the object's centripetal acceleration is therefore  $a = v^2/r = 5.24 \text{ m/s}^2$ .

(b) The average acceleration is given by Eq. 4-15:

$$\vec{a}_{\text{avg}} = \frac{\vec{v}_2 - \vec{v}_1}{t_2 - t_1} = \frac{(-3.00\hat{i} - 4.00\hat{j}) \text{ m/s} - (3.00\hat{i} + 4.00\hat{j}) \text{ m/s}}{5.00 \text{ s} - 2.00 \text{ s}} = (-2.00 \text{ m/s}^2)\hat{i} + (-2.67 \text{ m/s}^2)\hat{j}$$

which implies  $|\vec{a}_{\text{avg}}| = \sqrt{(-2.00 \text{ m/s}^2)^2 + (-2.67 \text{ m/s}^2)^2} = 3.33 \text{ m/s}^2$ .

69. We use Eq. 4-15 first using velocities relative to the truck (subscript t) and then using velocities relative to the ground (subscript g). We work with SI units, so  $20 \text{ km/h} \rightarrow 5.6 \text{ m/s}$ ,  $30 \text{ km/h} \rightarrow 8.3 \text{ m/s}$ , and  $45 \text{ km/h} \rightarrow 12.5 \text{ m/s}$ . We choose east as the  $+\hat{i}$  direction.

(a) The velocity of the cheetah (subscript c) at the end of the 2.0 s interval is (from Eq. 4-44)

$$\vec{v}_{ct} = \vec{v}_{cg} - \vec{v}_{tg} = (12.5 \text{ m/s})\hat{i} - (-5.6 \text{ m/s})\hat{i} = (18.1 \text{ m/s})\hat{i}$$

relative to the truck. Since the velocity of the cheetah relative to the truck at the beginning of the 2.0 s interval is  $(-8.3 \text{ m/s})\hat{i}$ , the (average) acceleration vector relative to the cameraman (in the truck) is

$$\vec{a}_{\text{avg}} = \frac{(18.1 \text{ m/s})\hat{i} - (-8.3 \text{ m/s})\hat{i}}{2.0 \text{ s}} = (13 \text{ m/s}^2)\hat{i},$$

or  $|\vec{a}_{\text{avg}}| = 13 \text{ m/s}^2$ .

(b) The direction of  $\vec{a}_{\text{avg}}$  is  $+\hat{i}$ , or eastward.

(c) The velocity of the cheetah at the start of the 2.0 s interval is (from Eq. 4-44)

$$\vec{v}_{0cg} = \vec{v}_{0ct} + \vec{v}_{0g} = (-8.3 \text{ m/s})\hat{i} + (-5.6 \text{ m/s})\hat{i} = (-13.9 \text{ m/s})\hat{i}$$

relative to the ground. The (average) acceleration vector relative to the crew member (on the ground) is

$$\vec{a}_{\text{avg}} = \frac{(12.5 \text{ m/s})\hat{i} - (-13.9 \text{ m/s})\hat{i}}{2.0 \text{ s}} = (13 \text{ m/s}^2)\hat{i}, \quad |\vec{a}_{\text{avg}}| = 13 \text{ m/s}^2$$

identical to the result of part (a).

70. We use Eq. 4-44, noting that the upstream corresponds to the  $+\hat{i}$  direction.

(a) The subscript b is for the boat, w is for the water, and g is for the ground.

$$\vec{v}_{bg} = \vec{v}_{bw} + \vec{v}_{wg} = (14 \text{ km/h}) \hat{i} + (-9 \text{ km/h}) \hat{i} = (5 \text{ km/h}) \hat{i}.$$

Thus, the magnitude is  $|\vec{v}_{bg}| = 5 \text{ km/h}$ .

(b) The direction of  $\vec{v}_{bg}$  is  $+x$ , or upstream.

(c) We use the subscript c for the child, and obtain

$$\vec{v}_{cg} = \vec{v}_{cb} + \vec{v}_{bg} = (-6 \text{ km/h}) \hat{i} + (5 \text{ km/h}) \hat{i} = (-1 \text{ km/h}) \hat{i}.$$

The magnitude is  $|\vec{v}_{cg}| = 1 \text{ km/h}$ .

(d) The direction of  $\vec{v}_{cg}$  is  $-x$ , or downstream.

71. While moving in the same direction as the sidewalk's motion (covering a distance  $d$  relative to the ground in time  $t_1 = 2.50$  s), Eq. 4-44 leads to


$$v_{\text{sidewalk}} + v_{\text{man running}} = \frac{d}{t_1} .$$

While he runs back (taking time  $t_2 = 10.0$  s) we have

$$v_{\text{sidewalk}} - v_{\text{man running}} = -\frac{d}{t_2} .$$

Dividing these equations and solving for the desired ratio, we get  $\frac{12.5}{7.5} = \frac{5}{3} = 1.67$ .

72. We denote the velocity of the player with  $\vec{v}_{PF}$  and the relative velocity between the player and the ball be  $\vec{v}_{BP}$ . Then the velocity  $\vec{v}_{BF}$  of the ball relative to the field is given by  $\vec{v}_{BF} = \vec{v}_{PF} + \vec{v}_{BP}$ . The smallest angle  $\theta_{\min}$  corresponds to the case when  $\vec{v}_{BF} \perp \vec{v}_{PF}$ . Hence,

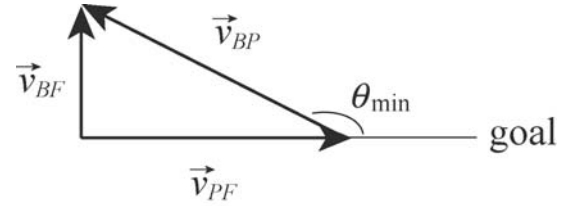

$$\theta_{\min} = 180^\circ - \cos^{-1} \left( \frac{|\vec{v}_{PF}|}{|\vec{v}_{BP}|} \right) = 180^\circ - \cos^{-1} \left( \frac{4.0 \text{ m/s}}{6.0 \text{ m/s}} \right) = 130^\circ.$$

73. The velocity vectors (relative to the shore) for ships  $A$  and  $B$  are given by

$$\begin{aligned}\vec{v}_A &= -(v_A \cos 45^\circ) \hat{i} + (v_A \sin 45^\circ) \hat{j} \\ \vec{v}_B &= -(v_B \sin 40^\circ) \hat{i} - (v_B \cos 40^\circ) \hat{j},\end{aligned}$$

with  $v_A = 24$  knots and  $v_B = 28$  knots. We take east as  $+\hat{i}$  and north as  $\hat{j}$ .

(a) Their relative velocity is

$$\vec{v}_{AB} = \vec{v}_A - \vec{v}_B = (v_B \sin 40^\circ - v_A \cos 45^\circ) \hat{i} + (v_B \cos 40^\circ + v_A \sin 45^\circ) \hat{j}$$

the magnitude of which is  $|\vec{v}_{AB}| = \sqrt{(1.03 \text{ knots})^2 + (38.4 \text{ knots})^2} \approx 38 \text{ knots}$ .

(b) The angle  $\theta$  which  $\vec{v}_{AB}$  makes with north is given by

$$\theta = \tan^{-1} \left( \frac{v_{AB,x}}{v_{AB,y}} \right) = \tan^{-1} \left( \frac{1.03 \text{ knots}}{38.4 \text{ knots}} \right) = 1.5^\circ$$

which is to say that  $\vec{v}_{AB}$  points  $1.5^\circ$  east of north.

(c) Since they started at the same time, their relative velocity describes at what rate the distance between them is increasing. Because the rate is steady, we have

$$t = \frac{|\Delta r_{AB}|}{|\vec{v}_{AB}|} = \frac{160}{38.4} = 4.2 \text{ h.}$$

(d) The velocity  $\vec{v}_{AB}$  does not change with time in this problem, and  $\vec{r}_{AB}$  is in the same direction as  $\vec{v}_{AB}$  since they started at the same time. Reversing the points of view, we have  $\vec{v}_{AB} = -\vec{v}_{BA}$  so that  $\vec{r}_{AB} = -\vec{r}_{BA}$  (i.e., they are  $180^\circ$  opposite to each other). Hence, we conclude that  $B$  stays at a bearing of  $1.5^\circ$  west of south relative to  $A$  during the journey (neglecting the curvature of Earth).



74. The destination is  $\vec{D} = 800 \text{ km } \hat{j}$  where we orient axes so that  $+y$  points north and  $+x$  points east. This takes two hours, so the (constant) velocity of the plane (relative to the ground) is  $\vec{v}_{pg} = (400 \text{ km/h}) \hat{j}$ . This must be the vector sum of the plane's velocity with respect to the air which has  $(x,y)$  components  $(500\cos 70^\circ, 500\sin 70^\circ)$  and the velocity of the air (*wind*) relative to the ground  $\vec{v}_{ag}$ . Thus,

$$(400 \text{ km/h}) \hat{j} = (500 \text{ km/h}) \cos 70^\circ \hat{i} + (500 \text{ km/h}) \sin 70^\circ \hat{j} + \vec{v}_{ag}$$

which yields

$$\vec{v}_{ag} = (-171 \text{ km/h}) \hat{i} - (70.0 \text{ km/h}) \hat{j}.$$

(a) The magnitude of  $\vec{v}_{ag}$  is  $|\vec{v}_{ag}| = \sqrt{(-171 \text{ km/h})^2 + (-70.0 \text{ km/h})^2} = 185 \text{ km/h}$ .

(b) The direction of  $\vec{v}_{ag}$  is

$$\theta = \tan^{-1} \left( \frac{-70.0 \text{ km/h}}{-171 \text{ km/h}} \right) = 22.3^\circ \text{ (south of west).}$$

75. Relative to the car the velocity of the snowflakes has a vertical component of 8.0 m/s and a horizontal component of 50 km/h = 13.9 m/s. The angle  $\theta$  from the vertical is found from

$$\tan \theta = \frac{v_h}{v_v} = \frac{13.9 \text{ m/s}}{8.0 \text{ m/s}} = 1.74$$

which yields  $\theta = 60^\circ$ .

76. Velocities are taken to be constant; thus, the velocity of the plane relative to the ground is  $\vec{v}_{PG} = (55 \text{ km}) / (1/4 \text{ hour}) \hat{j} = (220 \text{ km/h}) \hat{j}$ . In addition,

$$\vec{v}_{AG} = (42 \text{ km/h})(\cos 20^\circ \hat{i} - \sin 20^\circ \hat{j}) = (39 \text{ km/h}) \hat{i} - (14 \text{ km/h}) \hat{j}.$$

Using  $\vec{v}_{PG} = \vec{v}_{PA} + \vec{v}_{AG}$ , we have

$$\vec{v}_{PA} = \vec{v}_{PG} - \vec{v}_{AG} = -(39 \text{ km/h}) \hat{i} + (234 \text{ km/h}) \hat{j}.$$

which implies  $|\vec{v}_{PA}| = 237 \text{ km/h}$ , or  $240 \text{ km/h}$  (to two significant figures.)

77. Since the raindrops fall vertically relative to the train, the horizontal component of the velocity of a raindrop is  $v_h = 30 \text{ m/s}$ , the same as the speed of the train. If  $v_v$  is the vertical component of the velocity and  $\theta$  is the angle between the direction of motion and the vertical, then  $\tan \theta = v_h/v_v$ . Thus  $v_v = v_h/\tan \theta = (30 \text{ m/s})/\tan 70^\circ = 10.9 \text{ m/s}$ . The speed of a raindrop is

$$v = \sqrt{v_h^2 + v_v^2} = \sqrt{(30 \text{ m/s})^2 + (10.9 \text{ m/s})^2} = 32 \text{ m/s}.$$

78. This is a classic problem involving two-dimensional relative motion. We align our coordinates so that *east* corresponds to  $+x$  and *north* corresponds to  $+y$ . We write the vector addition equation as  $\vec{v}_{BG} = \vec{v}_{BW} + \vec{v}_{WG}$ . We have  $\vec{v}_{WG} = (2.0 \angle 0^\circ)$  in the magnitude-angle notation (with the unit m/s understood), or  $\vec{v}_{WG} = 2.0\hat{i}$  in unit-vector notation. We also have  $\vec{v}_{BW} = (8.0 \angle 120^\circ)$  where we have been careful to phrase the angle in the ‘standard’ way (measured counterclockwise from the  $+x$  axis), or  $\vec{v}_{BW} = (-4.0\hat{i} + 6.9\hat{j})$  m/s.

(a) We can solve the vector addition equation for  $\vec{v}_{BG}$ :

$$\vec{v}_{BG} = \vec{v}_{BW} + \vec{v}_{WG} = (2.0 \text{ m/s})\hat{i} + (-4.0\hat{i} + 6.9\hat{j}) \text{ m/s} = (-2.0 \text{ m/s})\hat{i} + (6.9 \text{ m/s})\hat{j}.$$

Thus, we find  $|\vec{v}_{BG}| = 7.2 \text{ m/s}$ .

(b) The direction of  $\vec{v}_{BG}$  is  $\theta = \tan^{-1}[(6.9 \text{ m/s})/(-2.0 \text{ m/s})] = 106^\circ$  (measured counterclockwise from the  $+x$  axis), or  $16^\circ$  west of north.

(c) The velocity is constant, and we apply  $y - y_0 = v_y t$  in a reference frame. Thus, in the *ground* reference frame, we have  $(200 \text{ m}) = (7.2 \text{ m/s}) \sin(106^\circ) t \rightarrow t = 29 \text{ s}$ . Note: if a student obtains “28 s”, then the student has probably neglected to take the  $y$  component properly (a common mistake).

79. We denote the police and the motorist with subscripts  $p$  and  $m$ , respectively. The coordinate system is indicated in Fig. 4-49.

(a) The velocity of the motorist with respect to the police car is

$$\vec{v}_{m\,p} = \vec{v}_m - \vec{v}_p = (-60 \text{ km/h})\hat{j} - (-80 \text{ km/h})\hat{i} = (80 \text{ km/h})\hat{i} - (60 \text{ km/h})\hat{j}.$$

(b)  $\vec{v}_{m\,p}$  does happen to be along the line of sight. Referring to Fig. 4-49, we find the vector pointing from one car to another is  $\vec{r} = (800 \text{ m})\hat{i} - (600 \text{ m})\hat{j}$  (from  $M$  to  $P$ ). Since the ratio of components in  $\vec{r}$  is the same as in  $\vec{v}_{m\,p}$ , they must point the same direction.

(c) No, they remain unchanged.

80. We make use of Eq. 4-44 and Eq. 4-45.

The velocity of Jeep  $P$  relative to  $A$  at the instant is

$$\vec{v}_{PA} = (40.0 \text{ m/s})(\cos 60^\circ \hat{i} + \sin 60^\circ \hat{j}) = (20.0 \text{ m/s})\hat{i} + (34.6 \text{ m/s})\hat{j}.$$

Similarly, the velocity of Jeep  $B$  relative to  $A$  at the instant is

$$\vec{v}_{BA} = (20.0 \text{ m/s})(\cos 30^\circ \hat{i} + \sin 30^\circ \hat{j}) = (17.3 \text{ m/s})\hat{i} + (10.0 \text{ m/s})\hat{j}.$$

Thus, the velocity of  $P$  relative to  $B$  is

$$\vec{v}_{PB} = \vec{v}_{PA} - \vec{v}_{BA} = (20.0\hat{i} + 34.6\hat{j}) \text{ m/s} - (17.3\hat{i} + 10.0\hat{j}) \text{ m/s} = (2.68 \text{ m/s})\hat{i} + (24.6 \text{ m/s})\hat{j}.$$

(a) The magnitude of  $\vec{v}_{PB}$  is  $|\vec{v}_{PB}| = \sqrt{(2.68 \text{ m/s})^2 + (24.6 \text{ m/s})^2} = 24.8 \text{ m/s}$ .

(b) The direction of  $\vec{v}_{PB}$  is  $\theta = \tan^{-1}[(24.6 \text{ m/s})/(2.68 \text{ m/s})] = 83.8^\circ$  north of east (or  $6.2^\circ$  east of north).

(c) The acceleration of  $P$  is

$$\vec{a}_{PA} = (0.400 \text{ m/s}^2)(\cos 60.0^\circ \hat{i} + \sin 60.0^\circ \hat{j}) = (0.200 \text{ m/s}^2)\hat{i} + (0.346 \text{ m/s}^2)\hat{j},$$

and  $\vec{a}_{PA} = \vec{a}_{PB}$ . Thus, we have  $|\vec{a}_{PB}| = 0.400 \text{ m/s}^2$ .

(d) The direction is  $60.0^\circ$  north of east (or  $30.0^\circ$  east of north).

81. Here, the subscript  $W$  refers to the water. Our coordinates are chosen with  $+x$  being *east* and  $+y$  being *north*. In these terms, the angle specifying *east* would be  $0^\circ$  and the angle specifying *south* would be  $-90^\circ$  or  $270^\circ$ . Where the length unit is not displayed, km is to be understood.

(a) We have  $\vec{v}_{AW} = \vec{v}_{AB} + \vec{v}_{BW}$ , so that

$$\vec{v}_{AB} = (22 \angle -90^\circ) - (40 \angle 37^\circ) = (56 \angle -125^\circ)$$

in the magnitude-angle notation (conveniently done with a vector-capable calculator in polar mode). Converting to rectangular components, we obtain

$$\vec{v}_{AB} = (-32 \text{ km/h}) \hat{i} - (46 \text{ km/h}) \hat{j}.$$

Of course, this could have been done in unit-vector notation from the outset.

(b) Since the velocity-components are constant, integrating them to obtain the position is straightforward ( $\vec{r} - \vec{r}_0 = \int \vec{v} dt$ )

$$\vec{r} = (2.5 - 32t) \hat{i} + (4.0 - 46t) \hat{j}$$

with lengths in kilometers and time in hours.

(c) The magnitude of this  $\vec{r}$  is  $r = \sqrt{(2.5 - 32t)^2 + (4.0 - 46t)^2}$ . We minimize this by taking a derivative and requiring it to equal zero — which leaves us with an equation for  $t$


$$\frac{dr}{dt} = \frac{1}{2} \frac{6286t - 528}{\sqrt{(2.5 - 32t)^2 + (4.0 - 46t)^2}} = 0$$

which yields  $t = 0.084$  h.

(d) Plugging this value of  $t$  back into the expression for the distance between the ships ( $r$ ), we obtain  $r = 0.2$  km. Of course, the calculator offers more digits ( $r = 0.225\dots$ ), but they are not significant; in fact, the uncertainties implicit in the given data, here, should make the ship captains worry.



82. We construct a right triangle starting from the clearing on the south bank, drawing a line (200 m long) due north (*upward* in our sketch) across the river, and then a line due west (upstream, leftward in our sketch) along the north bank for a distance  $(82 \text{ m}) + (1.1 \text{ m/s})t$ , where the  $t$ -dependent contribution is the distance that the river will carry the boat downstream during time  $t$ .



The hypotenuse of this right triangle (the arrow in our sketch) also depends on  $t$  and on the boat's speed (relative to the water), and we set it equal to the Pythagorean “sum” of the triangle's sides:

$$(4.0)t = \sqrt{200^2 + (82 + 1.1t)^2}$$

which leads to a quadratic equation for  $t$

$$46724 + 180.4t - 14.8t^2 = 0.$$

We solve this and find a positive value:  $t = 62.6 \text{ s}$ .

The angle between the northward (200 m) leg of the triangle and the hypotenuse (which is measured “west of north”) is then given by

$$\theta = \tan^{-1} \left( \frac{82 + 1.1t}{200} \right) = \tan^{-1} \left( \frac{151}{200} \right) = 37^\circ.$$

83. Using displacement = velocity  $\times$  time (for each constant-velocity part of the trip), along with the fact that 1 hour = 60 minutes, we have the following vector addition exercise (using notation appropriate to many vector capable calculators):

$$(1667 \text{ m } \angle 0^\circ) + (1333 \text{ m } \angle -90^\circ) + (333 \text{ m } \angle 180^\circ) + (833 \text{ m } \angle -90^\circ) + (667 \text{ m } \angle 180^\circ) + (417 \text{ m } \angle -90^\circ) = (2668 \text{ m } \angle -76^\circ).$$

(a) Thus, the magnitude of the net displacement is 2.7 km.

(b) Its direction is  $76^\circ$  clockwise (relative to the initial direction of motion).


84. We compute the coordinate pairs  $(x, y)$  from  $x = (v_0 \cos \theta)t$  and  $y = v_0 \sin \theta t - \frac{1}{2}gt^2$  for  $t = 20$  s and the speeds and angles given in the problem.

(a) We obtain

$$\begin{aligned} (x_A, y_A) &= (10.1 \text{ km}, 0.56 \text{ km}) & (x_B, y_B) &= (12.1 \text{ km}, 1.51 \text{ km}) \\ (x_C, y_C) &= (14.3 \text{ km}, 2.68 \text{ km}) & (x_D, y_D) &= (16.4 \text{ km}, 3.99 \text{ km}) \end{aligned}$$

and  $(x_E, y_E) = (18.5 \text{ km}, 5.53 \text{ km})$  which we plot in the next part.

(b) The vertical ( $y$ ) and horizontal ( $x$ ) axes are in kilometers. The graph does not start at the origin. The curve to “fit” the data is not shown, but is easily imagined (forming the “curtain of death”).

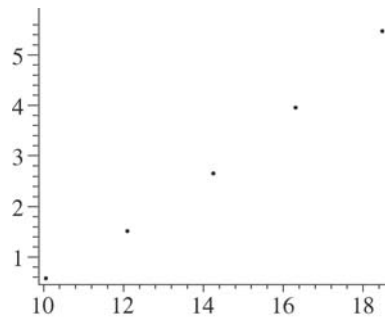

85. Let  $v_o = 2\pi(0.200 \text{ m})/(0.00500 \text{ s}) \approx 251 \text{ m/s}$  (using Eq. 4-35) be the speed it had in circular motion and  $\theta_o = (1 \text{ hr})(360^\circ/12 \text{ hr [for full rotation]}) = 30.0^\circ$ . Then Eq. 4-25 leads to

$$y = (2.50 \text{ m}) \tan 30.0^\circ - \frac{(9.8 \text{ m/s}^2)(2.50 \text{ m})^2}{2(251 \text{ m/s})^2 (\cos 30.0^\circ)^2} \approx 1.44 \text{ m}$$

which means its height above the floor is  $1.44 \text{ m} + 1.20 \text{ m} = 2.64 \text{ m}$ .

86. For circular motion, we must have  $\vec{v}$  with direction perpendicular to  $\vec{r}$  and (since the speed is constant) magnitude  $v = 2\pi r / T$  where  $r = \sqrt{(2.00 \text{ m})^2 + (-3.00 \text{ m})^2}$  and  $T = 7.00 \text{ s}$ . The  $\vec{r}$  (given in the problem statement) specifies a point in the fourth quadrant, and since the motion is clockwise then the velocity must have both components negative. Our result, satisfying these three conditions, (using unit-vector notation which makes it easy to double-check that  $\vec{r} \cdot \vec{v} = 0$ ) for  $\vec{v} = (-2.69 \text{ m/s})\hat{i} + (-1.80 \text{ m/s})\hat{j}$ .

87. Using Eq. 2-16, we obtain  $v^2 = v_0^2 - 2gh$ , or  $h = (v_0^2 - v^2) / 2g$ .

(a) Since  $v = 0$  at the maximum height of an upward motion, with  $v_0 = 7.00 \text{ m/s}$ , we have  $h = (7.00 \text{ m/s})^2 / 2(9.80 \text{ m/s}^2) = 2.50 \text{ m}$ .

(b) The relative speed is  $v_r = v_0 - v_c = 7.00 \text{ m/s} - 3.00 \text{ m/s} = 4.00 \text{ m/s}$  with respect to the floor. Using the above equation we obtain  $h = (4.00 \text{ m/s})^2 / 2(9.80 \text{ m/s}^2) = 0.82 \text{ m}$ .

(c) The acceleration, or the rate of change of speed of the ball with respect to the ground is  $9.80 \text{ m/s}^2$  (downward).

(d) Since the elevator cab moves at constant velocity, the rate of change of speed of the ball with respect to the cab floor is also  $9.80 \text{ m/s}^2$  (downward).

88. Relative to the sled, the launch velocity is  $\vec{v}_{o\ rel} = v_{ox} \hat{i} + v_{oy} \hat{j}$ . Since the sled's motion is in the negative direction with speed  $v_s$  (note that we are treating  $v_s$  as a positive number, so the sled's velocity is actually  $-v_s \hat{i}$ ), then the launch velocity relative to the ground is  $\vec{v}_o = (v_{ox} - v_s) \hat{i} + v_{oy} \hat{j}$ . The horizontal and vertical displacement (relative to the ground) are therefore

$$x_{\text{land}} - x_{\text{launch}} = \Delta x_{\text{bg}} = (v_{ox} - v_s) t_{\text{flight}}$$

$$y_{\text{land}} - y_{\text{launch}} = 0 = v_{oy} t_{\text{flight}} + \frac{1}{2}(-g)(t_{\text{flight}})^2.$$

Combining these equations leads to

$$\Delta x_{\text{bg}} = \frac{2 v_{ox} v_{oy}}{g} - \left( \frac{2 v_{oy}}{g} \right) v_s.$$

The first term corresponds to the “y intercept” on the graph, and the second term (in parentheses) corresponds to the magnitude of the “slope.” From Figure 4-54, we have

$$\Delta x_{\text{bg}} = 40 - 4v_s.$$

This implies  $v_{oy} = (4.0 \text{ s})(9.8 \text{ m/s}^2)/2 = 19.6 \text{ m/s}$ , and that furnishes enough information to determine  $v_{ox}$ .

(a)  $v_{ox} = 40g/2v_{oy} = (40 \text{ m})(9.8 \text{ m/s}^2)/(39.2 \text{ m/s}) = 10 \text{ m/s}$ .

(b) As noted above,  $v_{oy} = 19.6 \text{ m/s}$ .

(c) Relative to the sled, the displacement  $\Delta x_{\text{bs}}$  does not depend on the sled's speed, so  $\Delta x_{\text{bs}} = v_{ox} t_{\text{flight}} = 40 \text{ m}$ .

(d) As in (c), relative to the sled, the displacement  $\Delta x_{\text{bs}}$  does not depend on the sled's speed, and  $\Delta x_{\text{bs}} = v_{ox} t_{\text{flight}} = 40 \text{ m}$ .

89. We establish coordinates with  $\hat{i}$  pointing to the far side of the river (perpendicular to the current) and  $\hat{j}$  pointing in the direction of the current. We are told that the magnitude (presumed constant) of the velocity of the boat relative to the water is  $|\vec{v}_{bw}| = 6.4 \text{ km/h}$ . Its angle, relative to the  $x$  axis is  $\theta$ . With km and h as the understood units, the velocity of the water (relative to the ground) is  $\vec{v}_{wg} = (3.2 \text{ km/h})\hat{j}$ .

(a) To reach a point “directly opposite” means that the velocity of her boat relative to ground must be  $\vec{v}_{bg} = v_{bg}\hat{i}$  where  $v_{bg} > 0$  is unknown. Thus, all  $\hat{j}$  components must cancel in the vector sum  $\vec{v}_{bw} + \vec{v}_{wg} = \vec{v}_{bg}$ , which means the  $\vec{v}_{bw} \sin \theta = (-3.2 \text{ km/h})\hat{j}$ , so

$$\theta = \sin^{-1} [(-3.2 \text{ km/h})/(6.4 \text{ km/h})] = -30^\circ.$$

(b) Using the result from part (a), we find  $v_{bg} = v_{bw} \cos \theta = 5.5 \text{ km/h}$ . Thus, traveling a distance of  $\ell = 6.4 \text{ km}$  requires a time of  $(6.4 \text{ km})/(5.5 \text{ km/h}) = 1.15 \text{ h}$  or 69 min.

(c) If her motion is completely along the  $y$  axis (as the problem implies) then with  $v_{wg} = 3.2 \text{ km/h}$  (the water speed) we have

$$t_{\text{total}} = \frac{D}{v_{bw} + v_{wg}} + \frac{D}{v_{bw} - v_{wg}} = 1.33 \text{ h}$$

where  $D = 3.2 \text{ km}$ . This is equivalent to 80 min.

(d) Since

$$\frac{D}{v_{bw} + v_{wg}} + \frac{D}{v_{bw} - v_{wg}} = \frac{D}{v_{bw} - v_{wg}} + \frac{D}{v_{bw} + v_{wg}}$$

the answer is the same as in the previous part, i.e.,  $t_{\text{total}} = 80 \text{ min}$ .

(e) The shortest-time path should have  $\theta = 0^\circ$ . This can also be shown by noting that the case of general  $\theta$  leads to

$$\vec{v}_{bg} = \vec{v}_{bw} + \vec{v}_{wg} = v_{bw} \cos \theta \hat{i} + (v_{bw} \sin \theta + v_{wg}) \hat{j}$$

where the  $x$  component of  $\vec{v}_{bg}$  must equal  $\ell/t$ . Thus,

$$t = \frac{\ell}{v_{bw} \cos \theta}$$

which can be minimized using  $dt/d\theta = 0$ .

(f) The above expression leads to  $t = (6.4 \text{ km})/(6.4 \text{ km/h}) = 1.0 \text{ h}$ , or 60 min.



90. We use a coordinate system with +x eastward and +y upward.

(a) We note that  $123^\circ$  is the angle between the initial position and later position vectors, so that the angle from +x to the later position vector is  $40^\circ + 123^\circ = 163^\circ$ . In unit-vector notation, the position vectors are

$$\vec{r}_1 = (360 \text{ m})\cos(40^\circ)\hat{i} + (360 \text{ m})\sin(40^\circ)\hat{j} = (276 \text{ m})\hat{i} + (231 \text{ m})\hat{j}$$

$$\vec{r}_2 = (790 \text{ m})\cos(163^\circ)\hat{i} + (790 \text{ m})\sin(163^\circ)\hat{j} = (-755 \text{ m})\hat{i} + (231 \text{ m})\hat{j}$$

respectively. Consequently, we plug into Eq. 4-3

$$\Delta\vec{r} = [(-755 \text{ m}) - (276 \text{ m})]\hat{i} + (231 \text{ m} - 231 \text{ m})\hat{j} = -(1031 \text{ m})\hat{i}.$$

The magnitude of the displacement  $\Delta\vec{r}$  is  $|\Delta\vec{r}| = 1031 \text{ m}$ .

(b) The direction of  $\Delta\vec{r}$  is  $-\hat{i}$ , or westward.

91. We adopt the positive direction choices used in the textbook so that equations such as Eq. 4-22 are directly applicable.

(a) With the origin at the firing point, the  $y$  coordinate of the bullet is given by  $y = -\frac{1}{2}gt^2$ . If  $t$  is the time of flight and  $y = -0.019$  m indicates where the bullet hits the target, then

$$t = \sqrt{\frac{2(0.019 \text{ m})}{9.8 \text{ m/s}^2}} = 6.2 \times 10^{-2} \text{ s.}$$

(b) The muzzle velocity is the initial (horizontal) velocity of the bullet. Since  $x = 30$  m is the horizontal position of the target, we have  $x = v_0 t$ . Thus,

$$v_0 = \frac{x}{t} = \frac{30 \text{ m}}{6.3 \times 10^{-2} \text{ s}} = 4.8 \times 10^2 \text{ m/s.}$$

92. Eq. 4-34 describes an inverse proportionality between  $r$  and  $a$ , so that a large acceleration results from a small radius. Thus, an upper limit for  $a$  corresponds to a lower limit for  $r$ .

(a) The minimum turning radius of the train is given by

$$r_{\min} = \frac{v^2}{a_{\max}} = \frac{(216 \text{ km/h})^2}{(0.050)(9.8 \text{ m/s}^2)} = 7.3 \times 10^3 \text{ m}.$$

(b) The speed of the train must be reduced to no more than

$$v = \sqrt{a_{\max} r} = \sqrt{0.050(9.8 \text{ m/s}^2)(1.00 \times 10^3 \text{ m})} = 22 \text{ m/s}$$

which is roughly 80 km/h.

93. (a) With  $r = 0.15$  m and  $a = 3.0 \times 10^{14}$  m/s<sup>2</sup>, Eq. 4-34 gives

$$v = \sqrt{ra} = 6.7 \times 10^6 \text{ m/s}.$$

(b) The period is given by Eq. 4-35:

$$T = \frac{2\pi r}{v} = 1.4 \times 10^{-7} \text{ s}.$$

94. We use Eq. 4-2 and Eq. 4-3.

(a) With the initial position vector as  $\vec{r}_1$  and the later vector as  $\vec{r}_2$ , Eq. 4-3 yields

$$\Delta r = [(-2.0 \text{ m}) - 5.0 \text{ m}]\hat{i} + [(6.0 \text{ m}) - (-6.0 \text{ m})]\hat{j} + (2.0 \text{ m} - 2.0 \text{ m})\hat{k} = (-7.0 \text{ m})\hat{i} + (12 \text{ m})\hat{j}$$

for the displacement vector in unit-vector notation.

(b) Since there is no  $z$  component (that is, the coefficient of  $\hat{k}$  is zero), the displacement vector is in the  $xy$  plane.

95. We write our magnitude-angle results in the form  $(R \angle \theta)$  with SI units for the magnitude understood (m for distances, m/s for speeds,  $\text{m/s}^2$  for accelerations). All angles  $\theta$  are measured counterclockwise from  $+x$ , but we will occasionally refer to angles  $\phi$  which are measured counterclockwise from the vertical line between the circle-center and the coordinate origin and the line drawn from the circle-center to the particle location (see  $r$  in the figure). We note that the speed of the particle is  $v = 2\pi r/T$  where  $r = 3.00$  m and  $T = 20.0$  s; thus,  $v = 0.942$  m/s. The particle is moving counterclockwise in Fig. 4-56.

(a) At  $t = 5.0$  s, the particle has traveled a fraction of

$$\frac{t}{T} = \frac{5.00 \text{ s}}{20.0 \text{ s}} = \frac{1}{4}$$

of a full revolution around the circle (starting at the origin). Thus, relative to the circle-center, the particle is at

$$\phi = \frac{1}{4}(360^\circ) = 90^\circ$$

measured from vertical (as explained above). Referring to Fig. 4-56, we see that this position (which is the “3 o’clock” position on the circle) corresponds to  $x = 3.0$  m and  $y = 3.0$  m relative to the coordinate origin. In our magnitude-angle notation, this is expressed as  $(R \angle \theta) = (4.2 \angle 45^\circ)$ . Although this position is easy to analyze without resorting to trigonometric relations, it is useful (for the computations below) to note that these values of  $x$  and  $y$  relative to coordinate origin can be gotten from the angle  $\phi$  from the relations

$$x = r \sin \phi, \quad y = r - r \cos \phi.$$

Of course,  $R = \sqrt{x^2 + y^2}$  and  $\theta$  comes from choosing the appropriate possibility from  $\tan^{-1}(y/x)$  (or by using particular functions of vector-capable calculators).

(b) At  $t = 7.5$  s, the particle has traveled a fraction of  $7.5/20 = 3/8$  of a revolution around the circle (starting at the origin). Relative to the circle-center, the particle is therefore at  $\phi = 3/8(360^\circ) = 135^\circ$  measured from vertical in the manner discussed above. Referring to Fig. 4-56, we compute that this position corresponds to

$$\begin{aligned} x &= (3.00 \text{ m}) \sin 135^\circ = 2.1 \text{ m} \\ y &= (3.0 \text{ m}) - (3.0 \text{ m}) \cos 135^\circ = 5.1 \text{ m} \end{aligned}$$

relative to the coordinate origin. In our magnitude-angle notation, this is expressed as  $(R \angle \theta) = (5.5 \angle 68^\circ)$ .

(c) At  $t = 10.0$  s, the particle has traveled a fraction of  $10/20 = 1/2$  of a revolution around the circle. Relative to the circle-center, the particle is at  $\phi = 180^\circ$  measured from vertical (see explanation, above). Referring to Fig. 4-56, we see that this position corresponds to  $x = 0$  and  $y = 6.0$  m relative to the coordinate origin. In our magnitude-angle notation, this is expressed as  $(R \angle \theta) = (6.0 \angle 90^\circ)$ .

(d) We subtract the position vector in part (a) from the position vector in part (c):

$$(6.0 \angle 90^\circ) - (4.2 \angle 45^\circ) = (4.2 \angle 135^\circ)$$

using magnitude-angle notation (convenient when using vector-capable calculators). If we wish instead to use unit-vector notation, we write

$$\Delta \vec{R} = (0 - 3.0 \text{ m}) \hat{i} + (6.0 \text{ m} - 3.0 \text{ m}) \hat{j} = (-3.0 \text{ m}) \hat{i} + (3.0 \text{ m}) \hat{j}$$

which leads to  $|\Delta \vec{R}| = 4.2$  m and  $\theta = 135^\circ$ .

(e) From Eq. 4-8, we have  $\vec{v}_{\text{avg}} = \Delta \vec{R} / \Delta t$ . With  $\Delta t = 5.0$  s, we have

$$\vec{v}_{\text{avg}} = (-0.60 \text{ m/s}) \hat{i} + (0.60 \text{ m/s}) \hat{j}$$

in unit-vector notation or  $(0.85 \angle 135^\circ)$  in magnitude-angle notation.

(f) The speed has already been noted ( $v = 0.94$  m/s), but its direction is best seen by referring again to Fig. 4-56. The velocity vector is tangent to the circle at its “3 o’clock position” (see part (a)), which means  $\vec{v}$  is vertical. Thus, our result is  $(0.94 \angle 90^\circ)$ .

(g) Again, the speed has been noted above ( $v = 0.94$  m/s), but its direction is best seen by referring to Fig. 4-56. The velocity vector is tangent to the circle at its “12 o’clock position” (see part (c)), which means  $\vec{v}$  is horizontal. Thus, our result is  $(0.94 \angle 180^\circ)$ .

(h) The acceleration has magnitude  $a = v^2/r = 0.30 \text{ m/s}^2$ , and at this instant (see part (a)) it is horizontal (towards the center of the circle). Thus, our result is  $(0.30 \angle 180^\circ)$ .

(i) Again,  $a = v^2/r = 0.30 \text{ m/s}^2$ , but at this instant (see part (c)) it is vertical (towards the center of the circle). Thus, our result is  $(0.30 \angle 270^\circ)$ .

96. Noting that  $\vec{v}_2 = 0$ , then, using Eq. 4-15, the average acceleration is

$$\vec{a}_{\text{avg}} = \frac{\Delta \vec{v}}{\Delta t} = \frac{0 - (6.30\hat{i} - 8.42\hat{j}) \text{ m/s}}{3 \text{ s}} = (-2.1\hat{i} + 2.8\hat{j}) \text{ m/s}^2$$



97. (a) The magnitude of the displacement vector  $\Delta \vec{r}$  is given by

$$|\Delta \vec{r}| = \sqrt{(21.5 \text{ km})^2 + (9.7 \text{ km})^2 + (2.88 \text{ km})^2} = 23.8 \text{ km}.$$

Thus,

$$|\vec{v}_{\text{avg}}| = \frac{|\Delta \vec{r}|}{\Delta t} = \frac{23.8 \text{ km}}{3.50 \text{ h}} = 6.79 \text{ km/h}.$$

(b) The angle  $\theta$  in question is given by

$$\theta = \tan^{-1} \left( \frac{2.88 \text{ km}}{\sqrt{(21.5 \text{ km})^2 + (9.7 \text{ km})^2}} \right) = 6.96^\circ.$$

98. The initial velocity has magnitude  $v_0$  and because it is horizontal, it is equal to  $v_x$  the horizontal component of velocity at impact. Thus, the speed at impact is

$$\sqrt{v_0^2 + v_y^2} = 3v_0$$

where  $v_y = \sqrt{2gh}$  and we have used Eq. 2-16 with  $\Delta x$  replaced with  $h = 20$  m. Squaring both sides of the first equality and substituting from the second, we find

$$v_0^2 + 2gh = (3v_0)^2$$

which leads to  $gh = 4v_0^2$  and therefore to  $v_0 = \sqrt{(9.8 \text{ m/s}^2)(20 \text{ m})} / 2 = 7.0 \text{ m/s}$ .

99. We choose horizontal  $x$  and vertical  $y$  axes such that both components of  $\vec{v}_0$  are positive. Positive angles are counterclockwise from  $+x$  and negative angles are clockwise from it. In unit-vector notation, the velocity at each instant during the projectile motion is

$$\vec{v} = v_0 \cos \theta_0 \hat{i} + (v_0 \sin \theta_0 - gt) \hat{j}.$$

(a) With  $v_0 = 30$  m/s and  $\theta_0 = 60^\circ$ , we obtain  $\vec{v} = (15\hat{i} + 6.4\hat{j})$  m/s, for  $t = 2.0$  s. The magnitude of  $\vec{v}$  is  $|\vec{v}| = \sqrt{(15 \text{ m/s})^2 + (6.4 \text{ m/s})^2} = 16$  m/s.

(b) The direction of  $\vec{v}$  is

$$\theta = \tan^{-1}[(6.4 \text{ m/s})/(15 \text{ m/s})] = 23^\circ,$$

measured counterclockwise from  $+x$ .

(c) Since the angle is positive, it is above the horizontal.

(d) With  $t = 5.0$  s, we find  $\vec{v} = (15\hat{i} - 23\hat{j})$  m/s, which yields

$$|\vec{v}| = \sqrt{(15 \text{ m/s})^2 + (-23 \text{ m/s})^2} = 27 \text{ m/s}.$$

(e) The direction of  $\vec{v}$  is  $\theta = \tan^{-1}[-23 \text{ m/s}/(15 \text{ m/s})] = -57^\circ$ , or  $57^\circ$  measured *clockwise* from  $+x$ .

(f) Since the angle is negative, it is below the horizontal.

100. The velocity of Larry is  $v_1$  and that of Curly is  $v_2$ . Also, we denote the length of the corridor by  $L$ . Now, Larry's time of passage is  $t_1 = 150$  s (which must equal  $L/v_1$ ), and Curly's time of passage is  $t_2 = 70$  s (which must equal  $L/v_2$ ). The time Moe takes is therefore

$$t = \frac{L}{v_1 + v_2} = \frac{1}{v_1/L + v_2/L} = \frac{1}{\frac{1}{150\text{ s}} + \frac{1}{70\text{ s}}} = 48\text{ s}.$$

101. We adopt the positive direction choices used in the textbook so that equations such as Eq. 4-22 are directly applicable. The coordinate origin is at the initial position for the football as it begins projectile motion in the sense of §4-5), and we let  $\theta_0$  be the angle of its initial velocity measured from the  $+x$  axis.

(a)  $x = 46$  m and  $y = -1.5$  m are the coordinates for the landing point; it lands at time  $t = 4.5$  s. Since  $x = v_{0x}t$ ,

$$v_{0x} = \frac{x}{t} = \frac{46 \text{ m}}{4.5 \text{ s}} = 10.2 \text{ m/s}.$$

Since  $y = v_{0y}t - \frac{1}{2}gt^2$ ,

$$v_{0y} = \frac{y + \frac{1}{2}gt^2}{t} = \frac{(-1.5 \text{ m}) + \frac{1}{2}(9.8 \text{ m/s}^2)(4.5 \text{ s})^2}{4.5 \text{ s}} = 21.7 \text{ m/s}.$$

The magnitude of the initial velocity is

$$v_0 = \sqrt{v_{0x}^2 + v_{0y}^2} = \sqrt{(10.2 \text{ m/s})^2 + (21.7 \text{ m/s})^2} = 24 \text{ m/s}.$$

(b) The initial angle satisfies  $\tan \theta_0 = v_{0y}/v_{0x}$ . Thus,  $\theta_0 = \tan^{-1} [(21.7 \text{ m/s})/(10.2 \text{ m/s})] = 65^\circ$ .

102. We assume the ball's initial velocity is perpendicular to the plane of the net. We choose coordinates so that  $(x_0, y_0) = (0, 3.0)$  m, and  $v_x > 0$  (note that  $v_{0y} = 0$ ).

(a) To (barely) clear the net, we have

$$y - y_0 = v_{0y}t - \frac{1}{2}gt^2 \Rightarrow 2.24 \text{ m} - 3.0 \text{ m} = 0 - \frac{1}{2}(9.8 \text{ m/s}^2)t^2$$

which gives  $t = 0.39$  s for the time it is passing over the net. This is plugged into the  $x$ -equation to yield the (minimum) initial velocity  $v_x = (8.0 \text{ m})/(0.39 \text{ s}) = 20.3 \text{ m/s}$ .

(b) We require  $y = 0$  and find  $t$  from  $y - y_0 = v_{0y}t - \frac{1}{2}gt^2$ . This value ( $t = \sqrt{2(3.0 \text{ m})/(9.8 \text{ m/s}^2)} = 0.78 \text{ s}$ ) is plugged into the  $x$ -equation to yield the (maximum) initial velocity  $v_x = (17.0 \text{ m})/(0.78 \text{ s}) = 21.7 \text{ m/s}$ .

103. (a) With  $\Delta x = 8.0 \text{ m}$ ,  $t = \Delta t_1$ ,  $a = a_x$ , and  $v_{ox} = 0$ , Eq. 2-15 gives

$$8.0 \text{ m} = \frac{1}{2} a_x (\Delta t_1)^2,$$

and the corresponding expression for motion along the  $y$  axis leads to

$$\Delta y = 12 \text{ m} = \frac{1}{2} a_y (\Delta t_1)^2.$$

Dividing the second expression by the first leads to  $a_y / a_x = 3 / 2 = 1.5$ .

(b) Letting  $t = 2\Delta t_1$ , then Eq. 2-15 leads to  $\Delta x = (8.0 \text{ m})(2)^2 = 32 \text{ m}$ , which implies that its  $x$  coordinate is now  $(4.0 + 32) \text{ m} = 36 \text{ m}$ . Similarly,  $\Delta y = (12 \text{ m})(2)^2 = 48 \text{ m}$ , which means its  $y$  coordinate has become  $(6.0 + 48) \text{ m} = 54 \text{ m}$ .

104. We apply Eq. 4-34 to solve for speed  $v$  and Eq. 4-35 to find the period  $T$ .

(a) We obtain

$$v = \sqrt{ra} = \sqrt{(5.0 \text{ m})(7.0)(9.8 \text{ m/s}^2)} = 19 \text{ m/s}.$$

(b) The time to go around once (the period) is  $T = 2\pi r/v = 1.7 \text{ s}$ . Therefore, in one minute ( $t = 60 \text{ s}$ ), the astronaut executes

$$\frac{t}{T} = \frac{60 \text{ s}}{1.7 \text{ s}} = 35$$

revolutions. Thus, 35 rev/min is needed to produce a centripetal acceleration of  $7g$  when the radius is 5.0 m.

(c) As noted above,  $T = 1.7 \text{ s}$ .



105. The radius of Earth may be found in Appendix C.

(a) The speed of an object at Earth's equator is  $v = 2\pi R/T$ , where  $R$  is the radius of Earth ( $6.37 \times 10^6$  m) and  $T$  is the length of a day ( $8.64 \times 10^4$  s):

$$v = 2\pi(6.37 \times 10^6 \text{ m})/(8.64 \times 10^4 \text{ s}) = 463 \text{ m/s}.$$

The magnitude of the acceleration is given by

$$a = \frac{v^2}{R} = \frac{(463 \text{ m/s})^2}{6.37 \times 10^6 \text{ m}} = 0.034 \text{ m/s}^2.$$

(b) If  $T$  is the period, then  $v = 2\pi R/T$  is the speed and the magnitude of the acceleration is

$$a = \frac{v^2}{R} = \frac{(2\pi R/T)^2}{R} = \frac{4\pi^2 R}{T^2}.$$

Thus,

$$T = 2\pi \sqrt{\frac{R}{a}} = 2\pi \sqrt{\frac{6.37 \times 10^6 \text{ m}}{9.8 \text{ m/s}^2}} = 5.1 \times 10^3 \text{ s} = 84 \text{ min}.$$

106. When the escalator is stalled the speed of the person is  $v_p = \ell/t$ , where  $\ell$  is the length of the escalator and  $t$  is the time the person takes to walk up it. This is  $v_p = (15 \text{ m})/(90 \text{ s}) = 0.167 \text{ m/s}$ . The escalator moves at  $v_e = (15 \text{ m})/(60 \text{ s}) = 0.250 \text{ m/s}$ . The speed of the person walking up the moving escalator is

$$v = v_p + v_e = 0.167 \text{ m/s} + 0.250 \text{ m/s} = 0.417 \text{ m/s}$$

and the time taken to move the length of the escalator is

$$t = \ell / v = (15 \text{ m}) / (0.417 \text{ m/s}) = 36 \text{ s}.$$

If the various times given are independent of the escalator length, then the answer does not depend on that length either. In terms of  $\ell$  (in meters) the speed (in meters per second) of the person walking on the stalled escalator is  $\ell/90$ , the speed of the moving escalator is  $\ell/60$ , and the speed of the person walking on the moving escalator is  $v = (\ell/90) + (\ell/60) = 0.0278\ell$ . The time taken is  $t = \ell/v = \ell/0.0278\ell = 36 \text{ s}$  and is independent of  $\ell$ .

107. (a) Eq. 2-15 can be applied to the vertical ( $y$  axis) motion related to reaching the maximum height (when  $t = 3.0$  s and  $v_y = 0$ ):

$$y_{\max} - y_0 = v_y t - \frac{1}{2} g t^2 .$$

With ground level chosen so  $y_0 = 0$ , this equation gives the result  $y_{\max} = \frac{1}{2} g (3.0 \text{ s})^2 = 44 \text{ m}$ .

(b) After the moment it reached maximum height, it is falling; at  $t = 2.5$  s, it will have fallen an amount given by Eq. 2-18:

$$y_{\text{fence}} - y_{\max} = (0)(2.5 \text{ s}) - \frac{1}{2} g (2.5 \text{ s})^2$$

which leads to  $y_{\text{fence}} = 13 \text{ m}$ .

(c) Either the *range* formula, Eq. 4-26, can be used or one can note that after passing the fence, it will strike the ground in 0.5 s (so that the total "fall-time" equals the "rise-time"). Since the horizontal component of velocity in a projectile-motion problem is constant (neglecting air friction), we find the original  $x$ -component from  $97.5 \text{ m} = v_{0x}(5.5 \text{ s})$  and then apply it to that final 0.5 s. Thus, we find  $v_{0x} = 17.7 \text{ m/s}$  and that after the fence

$$\Delta x = (17.7 \text{ m/s})(0.5 \text{ s}) = 8.9 \text{ m}.$$

108. With  $g_B = 9.8128 \text{ m/s}^2$  and  $g_M = 9.7999 \text{ m/s}^2$ , we apply Eq. 4-26:

$$R_M - R_B = \frac{v_0^2 \sin 2\theta_0}{g_M} - \frac{v_0^2 \sin 2\theta_0}{g_B} = \frac{v_0^2 \sin 2\theta_0}{g_B} \left( \frac{g_B}{g_M} - 1 \right)$$

which becomes

$$R_M - R_B = R_B \left( \frac{9.8128 \text{ m/s}^2}{9.7999 \text{ m/s}^2} - 1 \right)$$

and yields (upon substituting  $R_B = 8.09 \text{ m}$ )  $R_M - R_B = 0.01 \text{ m} = 1 \text{ cm}$ .

109. We make use of Eq. 4-25.

(a) By rearranging Eq. 4-25, we obtain the initial speed:

$$v_0 = \frac{x}{\cos \theta_0} \sqrt{\frac{g}{2(x \tan \theta_0 - y)}}$$

which yields  $v_0 = 255.5 \approx 2.6 \times 10^2$  m/s for  $x = 9400$  m,  $y = -3300$  m, and  $\theta_0 = 35^\circ$ .

(b) From Eq. 4-21, we obtain the time of flight:

$$t = \frac{x}{v_0 \cos \theta_0} = \frac{9400 \text{ m}}{(255.5 \text{ m/s}) \cos 35^\circ} = 45 \text{ s.}$$

(c) We expect the air to provide resistance but no appreciable lift to the rock, so we would need a greater launching speed to reach the same target.

110. When moving in the same direction as the jet stream (of speed  $v_s$ ), the time is

$$t_1 = \frac{d}{v_{ja} + v_s},$$

where  $d = 4000$  km is the distance and  $v_{ja}$  is the speed of the jet relative to the air (1000 km/h). When moving against the jet stream, the time is

$$t_2 = \frac{d}{v_{ja} - v_s},$$

where  $t_2 - t_1 = \frac{70}{60}$  h. Combining these equations and using the quadratic formula to solve gives  $v_s = 143$  km/h.

111. Since the  $x$  and  $y$  components of the acceleration are constants, we can use Table 2-1 for the motion along both axes. This can be handled individually (for  $\Delta x$  and  $\Delta y$ ) or together with the unit-vector notation (for  $\Delta \vec{r}$ ). Where units are not shown, SI units are to be understood.

(a) Since  $\vec{r}_0 = 0$ , the position vector of the particle is (adapting Eq. 2-15)

$$\vec{r} = \vec{v}_0 t + \frac{1}{2} \vec{a} t^2 = (8.0 \hat{j})t + \frac{1}{2} (4.0 \hat{i} + 2.0 \hat{j})t^2 = (2.0t^2) \hat{i} + (8.0t + 1.0t^2) \hat{j}.$$

Therefore, we find when  $x = 29$  m, by solving  $2.0t^2 = 29$ , which leads to  $t = 3.8$  s. The  $y$  coordinate at that time is  $y = (8.0 \text{ m/s})(3.8 \text{ s}) + (1.0 \text{ m/s}^2)(3.8 \text{ s})^2 = 45$  m.

(b) Adapting Eq. 2-11, the velocity of the particle is given by

$$\vec{v} = \vec{v}_0 + \vec{a}t.$$

Thus, at  $t = 3.8$  s, the velocity is

$$\vec{v} = (8.0 \text{ m/s}) \hat{j} + ((4.0 \text{ m/s}^2) \hat{i} + (2.0 \text{ m/s}^2) \hat{j})(3.8 \text{ s}) = (15.2 \text{ m/s}) \hat{i} + (15.6 \text{ m/s}) \hat{j}$$

which has a magnitude of

$$v = \sqrt{v_x^2 + v_y^2} = \sqrt{(15.2 \text{ m/s})^2 + (15.6 \text{ m/s})^2} = 22 \text{ m/s}.$$

112. We make use of Eq. 4-34 and Eq. 4-35.

(a) The track radius is given by

$$r = \frac{v^2}{a} = \frac{(9.2 \text{ m/s})^2}{3.8 \text{ m/s}^2} = 22 \text{ m}.$$

(b) The period of the circular motion is  $T = 2\pi(22 \text{ m})/(9.2 \text{ m/s}) = 15 \text{ s}$ .



113. Since this problem involves constant downward acceleration of magnitude  $a$ , similar to the projectile motion situation, we use the equations of §4-6 as long as we substitute  $a$  for  $g$ . We adopt the positive direction choices used in the textbook so that equations such as Eq. 4-22 are directly applicable. The initial velocity is horizontal so that  $v_{0y} = 0$  and

$$v_{0x} = v_0 = 1.00 \times 10^9 \text{ cm/s.}$$

(a) If  $\ell$  is the length of a plate and  $t$  is the time an electron is between the plates, then  $\ell = v_0 t$ , where  $v_0$  is the initial speed. Thus

$$t = \frac{\ell}{v_0} = \frac{2.00 \text{ cm}}{1.00 \times 10^9 \text{ cm/s}} = 2.00 \times 10^{-9} \text{ s.}$$

(b) The vertical displacement of the electron is

$$y = -\frac{1}{2}at^2 = -\frac{1}{2} (1.00 \times 10^{17} \text{ cm/s}^2) (2.00 \times 10^{-9} \text{ s})^2 = -0.20 \text{ cm} = -2.00 \text{ mm,}$$

or  $|y| = 2.00 \text{ mm.}$

(c) The  $x$  component of velocity does not change:  $v_x = v_0 = 1.00 \times 10^9 \text{ cm/s} = 1.00 \times 10^7 \text{ m/s.}$

(d) The  $y$  component of the velocity is

$$v_y = a_y t = (1.00 \times 10^{17} \text{ cm/s}^2) (2.00 \times 10^{-9} \text{ s}) = 2.00 \times 10^8 \text{ cm/s} = 2.00 \times 10^6 \text{ m/s.}$$

114. We neglect air resistance, which justifies setting  $a = -g = -9.8 \text{ m/s}^2$  (taking *down* as the  $-y$  direction) for the duration of the motion of the shot ball. We are allowed to use Table 2-1 (with  $\Delta y$  replacing  $\Delta x$ ) because the ball has constant acceleration motion. We use primed variables (except  $t$ ) with the constant-velocity elevator (so  $v' = 10 \text{ m/s}$ ), and unprimed variables with the ball (with initial velocity  $v_0 = v' + 20 = 30 \text{ m/s}$ , relative to the ground). SI units are used throughout.

(a) Taking the time to be zero at the instant the ball is shot, we compute its maximum height  $y$  (relative to the ground) with  $v^2 = v_0^2 - 2g(y - y_0)$ , where the highest point is characterized by  $v = 0$ . Thus,

$$y = y_0 + \frac{v_0^2}{2g} = 76 \text{ m}$$

where  $y_0 = y'_0 + 2 = 30 \text{ m}$  (where  $y'_0 = 28 \text{ m}$  is given in the problem) and  $v_0 = 30 \text{ m/s}$  relative to the ground as noted above.

(b) There are a variety of approaches to this question. One is to continue working in the frame of reference adopted in part (a) (which treats the ground as motionless and “fixes” the coordinate origin to it); in this case, one describes the elevator motion with  $y' = y'_0 + v't$  and the ball motion with Eq. 2-15, and solves them for the case where they reach the same point at the same time. Another is to work in the frame of reference of the elevator (the boy in the elevator might be oblivious to the fact the elevator is moving since it isn't accelerating), which is what we show here in detail:

$$\Delta y_e = v_{0e}t - \frac{1}{2}gt^2 \quad \Rightarrow \quad t = \frac{v_{0e} + \sqrt{v_{0e}^2 - 2g\Delta y_e}}{g}$$

where  $v_{0e} = 20 \text{ m/s}$  is the initial velocity of the ball relative to the elevator and  $\Delta y_e = -2.0 \text{ m}$  is the ball's displacement relative to the floor of the elevator. The positive root is chosen to yield a positive value for  $t$ ; the result is  $t = 4.2 \text{ s}$ .

115. (a) With  $v = c/10 = 3 \times 10^7$  m/s and  $a = 20g = 196 \text{ m/s}^2$ , Eq. 4-34 gives

$$r = v^2 / a = 4.6 \times 10^{12} \text{ m.}$$

(b) The period is given by Eq. 4-35:  $T = 2\pi r / v = 9.6 \times 10^5$  s. Thus, the time to make a quarter-turn is  $T/4 = 2.4 \times 10^5$  s or about 2.8 days.

116. Using the same coordinate system assumed in Eq. 4-25, we rearrange that equation to solve for the initial speed:

$$v_0 = \frac{x}{\cos \theta_0} \sqrt{\frac{g}{2 (x \tan \theta_0 - y)}}$$

which yields  $v_0 = 23 \text{ ft/s}$  for  $g = 32 \text{ ft/s}^2$ ,  $x = 13 \text{ ft}$ ,  $y = 3 \text{ ft}$  and  $\theta_0 = 55^\circ$ .

117. The (box)car has velocity  $\vec{v}_{cg} = v_1 \hat{i}$  relative to the ground, and the bullet has velocity

$$\vec{v}_{0bg} = v_2 \cos \theta \hat{i} + v_2 \sin \theta \hat{j}$$

relative to the ground before entering the car (we are neglecting the effects of gravity on the bullet). While in the car, its velocity relative to the outside ground is  $\vec{v}_{bg} = 0.8v_2 \cos \theta \hat{i} + 0.8v_2 \sin \theta \hat{j}$  (due to the 20% reduction mentioned in the problem). The problem indicates that the velocity of the bullet in the car *relative to the car* is (with  $v_3$  unspecified)  $\vec{v}_{bc} = v_3 \hat{j}$ . Now, Eq. 4-44 provides the condition

$$\begin{aligned} \vec{v}_{bg} &= \vec{v}_{bc} + \vec{v}_{cg} \\ 0.8v_2 \cos \theta \hat{i} + 0.8v_2 \sin \theta \hat{j} &= v_3 \hat{j} + v_1 \hat{i} \end{aligned}$$

so that equating  $x$  components allows us to find  $\theta$ . If one wished to find  $v_3$  one could also equate the  $y$  components, and from this, if the car width were given, one could find the time spent by the bullet in the car, but this information is not asked for (which is why the width is irrelevant). Therefore, examining the  $x$  components in SI units leads to

$$\theta = \cos^{-1} \left( \frac{v_1}{0.8v_2} \right) = \cos^{-1} \left( \frac{85 \text{ km/h} \left( \frac{1000 \text{ m/km}}{3600 \text{ s/h}} \right)}{0.8 (650 \text{ m/s})} \right)$$

which yields  $87^\circ$  for the direction of  $\vec{v}_{bg}$  (measured from  $\hat{i}$ , which is the direction of motion of the car). The problem asks, “from what direction was it fired?” — which means the answer is not  $87^\circ$  but rather its supplement  $93^\circ$  (measured from the direction of motion). Stating this more carefully, in the coordinate system we have adopted in our solution, the bullet velocity vector is in the first quadrant, at  $87^\circ$  measured counterclockwise from the  $+x$  direction (the direction of train motion), which means that the direction from which the bullet came (where the sniper is) is in the third quadrant, at  $-93^\circ$  (that is,  $93^\circ$  measured clockwise from  $+x$ ).

118. Since  $v_y^2 = v_{0y}^2 - 2g\Delta y$ , and  $v_y=0$  at the target, we obtain

$$v_{0y} = \sqrt{2(9.80 \text{ m/s}^2)(5.00 \text{ m})} = 9.90 \text{ m/s}$$

(a) Since  $v_0 \sin \theta_0 = v_{0y}$ , with  $v_0 = 12.0 \text{ m/s}$ , we find  $\theta_0 = 55.6^\circ$ .

(b) Now,  $v_y = v_{0y} - gt$  gives  $t = (9.90 \text{ m/s})/(9.80 \text{ m/s}^2) = 1.01 \text{ s}$ . Thus,  $\Delta x = (v_0 \cos \theta_0)t = 6.85 \text{ m}$ .

(c) The velocity at the target has only the  $v_x$  component, which is equal to  $v_{0x} = v_0 \cos \theta_0 = 6.78 \text{ m/s}$ .

119. From the figure, the three displacements can be written as

$$\vec{d}_1 = d_1(\cos \theta_1 \hat{i} + \sin \theta_1 \hat{j}) = (5.00 \text{ m})(\cos 30^\circ \hat{i} + \sin 30^\circ \hat{j}) = (4.33 \text{ m})\hat{i} + (2.50 \text{ m})\hat{j}$$

$$\begin{aligned}\vec{d}_2 &= d_2[\cos(180^\circ + \theta_1 - \theta_2)\hat{i} + \sin(180^\circ + \theta_1 - \theta_2)\hat{j}] = (8.00 \text{ m})(\cos 160^\circ \hat{i} + \sin 160^\circ \hat{j}) \\ &= (-7.52 \text{ m})\hat{i} + (2.74 \text{ m})\hat{j}\end{aligned}$$

$$\begin{aligned}\vec{d}_3 &= d_3[\cos(360^\circ - \theta_3 - \theta_2 + \theta_1)\hat{i} + \sin(360^\circ - \theta_3 - \theta_2 + \theta_1)\hat{j}] = (12.0 \text{ m})(\cos 260^\circ \hat{i} + \sin 260^\circ \hat{j}) \\ &= (-2.08 \text{ m})\hat{i} - (11.8 \text{ m})\hat{j}\end{aligned}$$

where the angles are measured from the  $+x$  axis. The net displacement is

$$\vec{d} = \vec{d}_1 + \vec{d}_2 + \vec{d}_3 = (-5.27 \text{ m})\hat{i} - (6.58 \text{ m})\hat{j}.$$

(a) The magnitude of the net displacement is

$$|\vec{d}| = \sqrt{(-5.27 \text{ m})^2 + (-6.58 \text{ m})^2} = 8.43 \text{ m}.$$

(b) The direction of  $\vec{d}$  is

$$\theta = \tan^{-1}\left(\frac{d_y}{d_x}\right) = \tan^{-1}\left(\frac{-6.58 \text{ m}}{-5.27 \text{ m}}\right) = 51.3^\circ \text{ or } 231^\circ.$$

We choose  $231^\circ$  (measured counterclockwise from  $+x$ ) since the desired angle is in the third quadrant. An equivalent answer is  $-129^\circ$  (measured clockwise from  $+x$ ).

120. With  $v_0 = 30.0$  m/s and  $R = 20.0$  m, Eq. 4-26 gives

$$\sin 2\theta_0 = \frac{gR}{v_0^2} = 0.218.$$

Because  $\sin \phi = \sin (180^\circ - \phi)$ , there are two roots of the above equation:

$$2\theta_0 = \sin^{-1}(0.218) = 12.58^\circ \text{ and } 167.4^\circ.$$

which correspond to the two possible launch angles that will hit the target (in the absence of air friction and related effects).

(a) The smallest angle is  $\theta_0 = 6.29^\circ$ .

(b) The greatest angle is and  $\theta_0 = 83.7^\circ$ .

An alternative approach to this problem in terms of Eq. 4-25 (with  $y = 0$  and  $1/\cos^2 = 1 + \tan^2$ ) is possible — and leads to a quadratic equation for  $\tan \theta_0$  with the roots providing these two possible  $\theta_0$  values.



121. On the one hand, we could perform the vector addition of the displacements with a vector-capable calculator in polar mode  $((75 \angle 37^\circ) + (65 \angle -90^\circ) = (63 \angle -18^\circ))$ , but in keeping with Eq. 3-5 and Eq. 3-6 we will show the details in unit-vector notation. We use a 'standard' coordinate system with  $+x$  East and  $+y$  North. Lengths are in kilometers and times are in hours.

(a) We perform the vector addition of individual displacements to find the net displacement of the camel.

$$\begin{aligned}\Delta\vec{r}_1 &= (75 \text{ km})\cos(37^\circ)\hat{i} + (75 \text{ km})\sin(37^\circ)\hat{j} \\ \Delta\vec{r}_2 &= (-65 \text{ km})\hat{j} \\ \Delta\vec{r} &= \Delta\vec{r}_1 + \Delta\vec{r}_2 = (60 \text{ km})\hat{i} - (20 \text{ km})\hat{j} .\end{aligned}$$

If it is desired to express this in magnitude-angle notation, then this is equivalent to a vector of length  $|\Delta\vec{r}| = \sqrt{(60 \text{ km})^2 + (-20 \text{ km})^2} = 63 \text{ km}$ .

(b) The direction of  $\Delta\vec{r}$  is  $\theta = \tan^{-1}[(-20 \text{ km})/(60 \text{ km})] = -18^\circ$ , or  $18^\circ$  south of east.

(c) We use the result from part (a) in Eq. 4-8 along with the fact that  $\Delta t = 90 \text{ h}$ . In unit vector notation, we obtain

$$\vec{v}_{\text{avg}} = \frac{(60\hat{i} - 20\hat{j}) \text{ km}}{90 \text{ h}} = (0.67\hat{i} - 0.22\hat{j}) \text{ km/h}.$$

This leads to  $|\vec{v}_{\text{avg}}| = 0.70 \text{ km/h}$ .

(d) The direction of  $\vec{v}_{\text{avg}}$  is  $\theta = \tan^{-1}[(-0.22 \text{ km/h})/(0.67 \text{ km/h})] = -18^\circ$ , or  $18^\circ$  south of east.

(e) The average speed is distinguished from the magnitude of average velocity in that it depends on the total distance as opposed to the net displacement. Since the camel travels 140 km, we obtain  $(140 \text{ km})/(90 \text{ h}) = 1.56 \text{ km/h} \approx 1.6 \text{ km/h}$ .

(f) The net displacement is required to be the 90 km East from  $A$  to  $B$ . The displacement from the resting place to  $B$  is denoted  $\Delta\vec{r}_3$ . Thus, we must have

$$\Delta\vec{r}_1 + \Delta\vec{r}_2 + \Delta\vec{r}_3 = (90 \text{ km})\hat{i}$$

which produces  $\Delta\vec{r}_3 = (30 \text{ km})\hat{i} + (20 \text{ km})\hat{j}$  in unit-vector notation, or  $(36 \angle 33^\circ)$  in magnitude-angle notation. Therefore, using Eq. 4-8 we obtain

$$|\vec{v}_{\text{avg}}| = \frac{36 \text{ km}}{(120 - 90) \text{ h}} = 1.2 \text{ km/h}.$$


(g) The direction of  $\vec{v}_{\text{avg}}$  is the same as  $\vec{r}_3$  (that is,  $33^\circ$  north of east).

122. We make use of Eq. 4-21 and Eq.4-22.


(a) With  $v_0 = 16$  m/s, we square Eq. 4-21 and Eq. 4-22 and add them, then (using Pythagoras' theorem) take the square root to obtain  $r$ :

$$\begin{aligned} r &= \sqrt{(x-x_0)^2 + (y-y_0)^2} = \sqrt{(v_0 \cos \theta_0 t)^2 + (v_0 \sin \theta_0 t - gt^2/2)^2} \\ &= t \sqrt{v_0^2 - v_0 g \sin \theta_0 t + g^2 t^2 / 4} \end{aligned}$$

Below we plot  $r$  as a function of time for  $\theta_0 = 40.0^\circ$ :

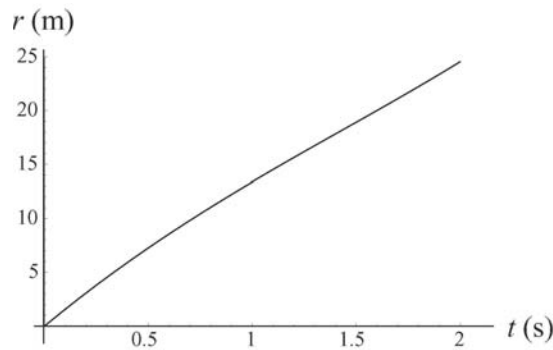

(b) For this next graph for  $r$  versus  $t$  we set  $\theta_0 = 80.0^\circ$ .

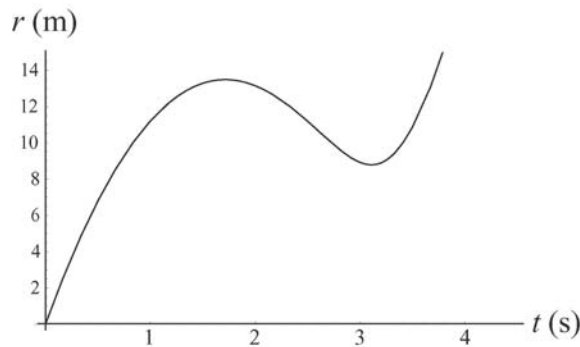

(c) Differentiating  $r$  with respect to  $t$ , we obtain

$$\frac{dr}{dt} = \frac{v_0^2 - 3v_0 g t \sin \theta_0 / 2 + g^2 t^2 / 2}{\sqrt{v_0^2 - v_0 g \sin \theta_0 t + g^2 t^2 / 4}}$$

Setting  $dr/dt = 0$ , with  $v_0 = 16.0$  m/s and  $\theta_0 = 40.0^\circ$ , we have  $256 - 151t + 48t^2 = 0$ . The equation has no real solution. This means that the maximum is reached at the end of the flight, with

$$t_{total} = 2v_0 \sin \theta_0 / g = 2(16.0 \text{ m/s}) \sin(40.0^\circ) / (9.80 \text{ m/s}^2) = 2.10 \text{ s}.$$

(d) The value of  $r$  is given by

$$r = (2.10)\sqrt{(16.0)^2 - (16.0)(9.80)\sin 40.0^\circ(2.10) + (9.80)^2(2.10)^2 / 4} = 25.7 \text{ m.}$$

(e) The horizontal distance is  $r_x = v_0 \cos \theta_0 t = (16.0 \text{ m/s})\cos 40.0^\circ(2.10 \text{ s}) = 25.7 \text{ m.}$

(f) The vertical distance is  $r_y = 0$ .

(g) For the  $\theta_0 = 80^\circ$  launch, the condition for maximum  $r$  is  $256 - 232t + 48t^2 = 0$ , or  $t = 1.71 \text{ s}$  (the other solution,  $t = 3.13 \text{ s}$ , corresponds to a minimum.)

(h) The distance traveled is

$$r = (1.71)\sqrt{(16.0)^2 - (16.0)(9.80)\sin 80.0^\circ(1.71) + (9.80)^2(1.71)^2 / 4} = 13.5 \text{ m.}$$

(i) The horizontal distance is

$$r_x = v_0 \cos \theta_0 t = (16.0 \text{ m/s})\cos 80.0^\circ(1.71 \text{ s}) = 4.75 \text{ m.}$$

(j) The vertical distance is

$$r_y = v_0 \sin \theta_0 t - \frac{gt^2}{2} = (16.0 \text{ m/s})\sin 80^\circ(1.71 \text{ s}) - \frac{(9.80 \text{ m/s}^2)(1.71 \text{ s})^2}{2} = 12.6 \text{ m.}$$

123. Using the same coordinate system assumed in Eq. 4-25, we find  $x$  for the elevated cannon from

$$y = x \tan \theta_0 - \frac{gx^2}{2(v_0 \cos \theta_0)^2} \quad \text{where } y = -30 \text{ m.}$$

Using the quadratic formula (choosing the positive root), we find

$$x = v_0 \cos \theta_0 \left( \frac{v_0 \sin \theta_0 + \sqrt{(v_0 \sin \theta_0)^2 - 2gy}}{g} \right)$$

which yields  $x = 715 \text{ m}$  for  $v_0 = 82 \text{ m/s}$  and  $\theta_0 = 45^\circ$ . This is 29 m longer than the 686 m found in that Sample Problem. Since the “9” in 29 m is not reliable, due to the low level of precision in the given data, we write the answer as  $3 \times 10^1 \text{ m}$ .

124. (a) Using the same coordinate system assumed in Eq. 4-25, we find

$$y = x \tan \theta_0 - \frac{gx^2}{2(v_0 \cos \theta_0)^2} = -\frac{gx^2}{2v_0^2} \quad \text{if } \theta_0 = 0.$$

Thus, with  $v_0 = 3.0 \times 10^6$  m/s and  $x = 1.0$  m, we obtain  $y = -5.4 \times 10^{-13}$  m which is not practical to measure (and suggests why gravitational processes play such a small role in the fields of atomic and subatomic physics).

(b) It is clear from the above expression that  $|y|$  decreases as  $v_0$  is increased.

125. At maximum height, the  $y$ -component of a projectile's velocity vanishes, so the given 10 m/s is the (constant)  $x$ -component of velocity.

(a) Using  $v_{0y}$  to denote the  $y$ -velocity 1.0 s before reaching the maximum height, then (with  $v_y = 0$ ) the equation  $v_y = v_{0y} - gt$  leads to  $v_{0y} = 9.8$  m/s. The magnitude of the velocity vector (or *speed*) at that moment is therefore

$$\sqrt{v_x^2 + v_{0y}^2} = \sqrt{(10 \text{ m/s})^2 + (9.8 \text{ m/s})^2} = 14 \text{ m/s}.$$

(b) It is clear from the symmetry of the problem that the speed is the same 1.0 s after reaching the top, as it was 1.0 s before (14 m/s again). This may be verified by using  $v_y = v_{0y} - gt$  again but now “starting the clock” at the highest point so that  $v_{0y} = 0$  (and  $t = 1.0$  s). This leads to  $v_y = -9.8$  m/s and  $\sqrt{(10 \text{ m/s})^2 + (-9.8 \text{ m/s})^2} = 14 \text{ m/s}$ .

(c) The  $x_0$  value may be obtained from  $x = 0 = x_0 + (10 \text{ m/s})(1.0\text{s})$ , which yields  $x_0 = -10\text{m}$ .

(d) With  $v_{0y} = 9.8$  m/s denoting the  $y$ -component of velocity one second before the top of the trajectory, then we have  $y = 0 = y_0 + v_{0y}t - \frac{1}{2}gt^2$  where  $t = 1.0$  s. This yields  $y_0 = -4.9$  m.

(e) By using  $x - x_0 = (10 \text{ m/s})(1.0 \text{ s})$  where  $x_0 = 0$ , we obtain  $x = 10$  m.

(f) Let  $t = 0$  at the top with  $y_0 = v_{0y} = 0$ . From  $y - y_0 = v_{0y}t - \frac{1}{2}gt^2$ , we have, for  $t = 1.0$  s,

$$y = -(9.8 \text{ m/s}^2)(1.0 \text{ s})^2 / 2 = -4.9 \text{ m}.$$

126. With no acceleration in the  $x$  direction yet a constant acceleration of  $1.4 \text{ m/s}^2$  in the  $y$  direction, the position (in meters) as a function of time (in seconds) must be

$$\vec{r} = (6.0t)\hat{i} + \left(\frac{1}{2}(1.4)t^2\right)\hat{j}$$

and  $\vec{v}$  is its derivative with respect to  $t$ .

(a) At  $t = 3.0 \text{ s}$ , therefore,  $\vec{v} = (6.0\hat{i} + 4.2\hat{j}) \text{ m/s}$ .

(b) At  $t = 3.0 \text{ s}$ , the position is  $\vec{r} = (18\hat{i} + 6.3\hat{j}) \text{ m}$ .

127. We note that

$$\vec{v}_{PG} = \vec{v}_{PA} + \vec{v}_{AG}$$

describes a right triangle, with one leg being  $\vec{v}_{PG}$  (east), another leg being  $\vec{v}_{AG}$  (magnitude = 20, direction = south), and the hypotenuse being  $\vec{v}_{PA}$  (magnitude = 70). Lengths are in kilometers and time is in hours. Using the Pythagorean theorem, we have

$$|\vec{v}_{PA}| = \sqrt{|\vec{v}_{PG}|^2 + |\vec{v}_{AG}|^2} \Rightarrow 70 \text{ km/h} = \sqrt{|\vec{v}_{PG}|^2 + (20 \text{ km/h})^2}$$

which is easily solved for the ground speed:  $|\vec{v}_{PG}| = 67 \text{ km/h}$ .



128. The figure offers many interesting points to analyze, and others are easily inferred (such as the point of maximum height). The focus here, to begin with, will be the final point shown (1.25 s after the ball is released) which is when the ball returns to its original height. In English units,  $g = 32 \text{ ft/s}^2$ .

(a) Using  $x - x_0 = v_x t$  we obtain  $v_x = (40 \text{ ft})/(1.25 \text{ s}) = 32 \text{ ft/s}$ . And  $y - y_0 = 0 = v_{0y} t - \frac{1}{2} g t^2$  yields  $v_{0y} = \frac{1}{2} (32 \text{ ft/s}^2) (1.25 \text{ s}) = 20 \text{ ft/s}$ . Thus, the initial speed is

$$v_0 = |\vec{v}_0| = \sqrt{(32 \text{ ft/s})^2 + (20 \text{ ft/s})^2} = 38 \text{ ft/s}.$$


(b) Since  $v_y = 0$  at the maximum height and the horizontal velocity stays constant, then the speed at the top is the same as  $v_x = 32 \text{ ft/s}$ .

(c) We can infer from the figure (or compute from  $v_y = 0 = v_{0y} - g t$ ) that the time to reach the top is 0.625 s. With this, we can use  $y - y_0 = v_{0y} t - \frac{1}{2} g t^2$  to obtain 9.3 ft (where  $y_0 = 3 \text{ ft}$  has been used). An alternative approach is to use  $v_y^2 = v_{0y}^2 - 2g(y - y_0)$ .

129. We denote  $\vec{v}_{PG}$  as the velocity of the plane relative to the ground,  $\vec{v}_{AG}$  as the velocity of the air relative to the ground, and  $\vec{v}_{PA}$  as the velocity of the plane relative to the air.

(a) The vector diagram is shown on the right:  $\vec{v}_{PG} = \vec{v}_{PA} + \vec{v}_{AG}$ . Since the magnitudes  $v_{PG}$  and  $v_{PA}$  are equal the triangle is isosceles, with two sides of equal length.

Consider either of the right triangles formed when the bisector of  $\theta$  is drawn (the dashed line). It bisects  $\vec{v}_{AG}$ , so

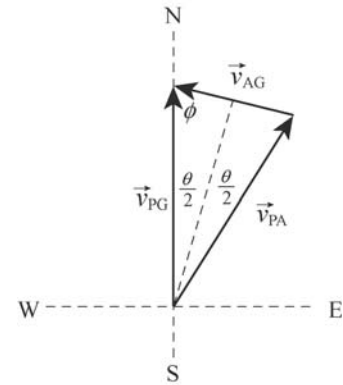

$$\sin(\theta/2) = \frac{v_{AG}}{2v_{PG}} = \frac{70.0 \text{ mi/h}}{2(135 \text{ mi/h})}$$

which leads to  $\theta = 30.1^\circ$ . Now  $\vec{v}_{AG}$  makes the same angle with the E-W line as the dashed line does with the N-S line. The wind is blowing in the direction  $15.0^\circ$  north of west. Thus, it is blowing *from*  $75.0^\circ$  east of south.

(b) The plane is headed along  $\vec{v}_{PA}$ , in the direction  $30.0^\circ$  east of north. There is another solution, with the plane headed  $30.0^\circ$  west of north and the wind blowing  $15^\circ$  north of east (that is, from  $75^\circ$  west of south).

130. Taking derivatives of  $\vec{r} = 2t\hat{i} + 2\sin(\pi t/4)\hat{j}$  (with lengths in meters, time in seconds and angles in radians) provides expressions for velocity and acceleration:

$$\vec{v} = \frac{d\vec{r}}{dt} = 2\hat{i} + \frac{\pi}{2}\cos\left(\frac{\pi t}{4}\right)\hat{j}$$

$$\vec{a} = \frac{d\vec{v}}{dt} = -\frac{\pi^2}{8}\sin\left(\frac{\pi t}{4}\right)\hat{j}.$$

Thus, we obtain:

time $t$			0.0	1.0	2.0	3.0	4.0
(a)	$\vec{r}$ position	$x$	0.0	2.0	4.0	6.0	8.0
		$y$	0.0	1.4	2.0	1.4	0.0
(b)	$\vec{v}$ velocity	$v_x$		2.0	2.0	2.0	
		$v_y$		1.1	0.0	-1.1	
(c)	$\vec{a}$ acceleration	$a_x$		0.0	0.0	0.0	
		$a_y$		-0.87	-1.2	-0.87	

And the path of the particle in the  $xy$  plane is shown in the following graph. The arrows indicating the velocities are not shown here, but they would appear as tangent-lines, as expected.

131. We make use of Eq. 4-24 and Eq. 4-25.

(a) With  $x = 180$  m,  $\theta_0 = 30^\circ$ , and  $v_0 = 43$  m/s, we obtain

$$y = \tan(30^\circ)(180 \text{ m}) - \frac{(9.8 \text{ m/s}^2)(180 \text{ m})^2}{2(43 \text{ m/s})^2(\cos 30^\circ)^2} = -11 \text{ m}$$

or  $|y| = 11$  m. This implies the rise is roughly eleven meters above the fairway.

(b) The horizontal component (in the absence of air friction) is unchanged, but the vertical component increases (see Eq. 4-24). The Pythagorean theorem then gives the magnitude of final velocity (right before striking the ground): 45 m/s.

132. We let  $g_p$  denote the magnitude of the gravitational acceleration on the planet. A number of the points on the graph (including some “inferred” points — such as the max height point at  $x = 12.5$  m and  $t = 1.25$  s) can be analyzed profitably; for future reference, we label (with subscripts) the first  $((x_0, y_0) = (0, 2)$  at  $t_0 = 0$ ) and last (“final”) points  $((x_f, y_f) = (25, 2)$  at  $t_f = 2.5$ ), with lengths in meters and time in seconds.

(a) The  $x$ -component of the initial velocity is found from  $x_f - x_0 = v_{0x} t_f$ . Therefore,  $v_{0x} = 25 / 2.5 = 10$  m/s. And we try to obtain the  $y$ -component from  $y_f - y_0 = 0 = v_{0y} t_f - \frac{1}{2} g_p t_f^2$ . This gives us  $v_{0y} = 1.25 g_p$ , and we see we need another equation (by analyzing another point, say, the next-to-last one)  $y - y_0 = v_{0y} t - \frac{1}{2} g_p t^2$  with  $y = 6$  and  $t = 2$ ; this produces our second equation  $v_{0y} = 2 + g_p$ . Simultaneous solution of these two equations produces results for  $v_{0y}$  and  $g_p$  (relevant to part (b)). Thus, our complete answer for the initial velocity is  $\vec{v} = (10 \text{ m/s})\hat{i} + (10 \text{ m/s})\hat{j}$ .

(b) As a by-product of the part (a) computations, we have  $g_p = 8.0 \text{ m/s}^2$ .

(c) Solving for  $t_g$  (the time to reach the ground) in  $y_g = 0 = y_0 + v_{0y} t_g - \frac{1}{2} g_p t_g^2$  leads to a positive answer:  $t_g = 2.7$  s.

(d) With  $g = 9.8 \text{ m/s}^2$ , the method employed in part (c) would produce the quadratic equation  $-4.9 t_g^2 + 10 t_g + 2 = 0$  and then the positive result  $t_g = 2.2$  s.

1. We apply Newton's second law (specifically, Eq. 5-2).

(a) We find the  $x$  component of the force is

$$F_x = ma_x = ma \cos 20.0^\circ = (1.00 \text{ kg}) (2.00 \text{ m/s}^2) \cos 20.0^\circ = 1.88 \text{ N}.$$

(b) The  $y$  component of the force is

$$F_y = ma_y = ma \sin 20.0^\circ = (1.0 \text{ kg}) (2.00 \text{ m/s}^2) \sin 20.0^\circ = 0.684 \text{ N}.$$

(c) In unit-vector notation, the force vector is

$$\vec{F} = F_x \hat{i} + F_y \hat{j} = (1.88 \text{ N}) \hat{i} + (0.684 \text{ N}) \hat{j}.$$

2. We apply Newton's second law (Eq. 5-1 or, equivalently, Eq. 5-2). The net force applied on the chopping block is  $\vec{F}_{\text{net}} = \vec{F}_1 + \vec{F}_2$ , where the vector addition is done using unit-vector notation. The acceleration of the block is given by  $\vec{a} = (\vec{F}_1 + \vec{F}_2) / m$ .

(a) In the first case

$$\vec{F}_1 + \vec{F}_2 = [(3.0\text{N})\hat{i} + (4.0\text{N})\hat{j}] + [(-3.0\text{N})\hat{i} + (-4.0\text{N})\hat{j}] = 0$$

so  $\vec{a} = 0$ .

(b) In the second case, the acceleration  $\vec{a}$  equals

$$\frac{\vec{F}_1 + \vec{F}_2}{m} = \frac{[(3.0\text{N})\hat{i} + (4.0\text{N})\hat{j}] + [(-3.0\text{N})\hat{i} + (4.0\text{N})\hat{j}]}{2.0\text{kg}} = (4.0\text{m/s}^2)\hat{j}.$$

(c) In this final situation,  $\vec{a}$  is

$$\frac{\vec{F}_1 + \vec{F}_2}{m} = \frac{[(3.0\text{N})\hat{i} + (4.0\text{N})\hat{j}] + [(3.0\text{N})\hat{i} + (-4.0\text{N})\hat{j}]}{2.0\text{kg}} = (3.0\text{m/s}^2)\hat{i}.$$

3. We are only concerned with horizontal forces in this problem (gravity plays no direct role). We take East as the  $+x$  direction and North as  $+y$ . This calculation is efficiently implemented on a vector-capable calculator, using magnitude-angle notation (with SI units understood).

$$\vec{a} = \frac{\vec{F}}{m} = \frac{(9.0 \angle 0^\circ) + (8.0 \angle 118^\circ)}{3.0} = (2.9 \angle 53^\circ)$$

Therefore, the acceleration has a magnitude of  $2.9 \text{ m/s}^2$ .



4. We note that  $m\vec{a} = (-16 \text{ N})\hat{i} + (12 \text{ N})\hat{j}$ . With the other forces as specified in the problem, then Newton's second law gives the third force as

$$\vec{F}_3 = m\vec{a} - \vec{F}_1 - \vec{F}_2 = (-34 \text{ N})\hat{i} - (12 \text{ N})\hat{j}.$$

5. We denote the two forces  $\vec{F}_1$  and  $\vec{F}_2$ . According to Newton's second law,  $\vec{F}_1 + \vec{F}_2 = m\vec{a}$ , so  $\vec{F}_2 = m\vec{a} - \vec{F}_1$ .

(a) In unit vector notation  $\vec{F}_1 = (20.0 \text{ N})\hat{i}$  and

$$\vec{a} = -(12.0 \sin 30.0^\circ \text{ m/s}^2)\hat{i} - (12.0 \cos 30.0^\circ \text{ m/s}^2)\hat{j} = -(6.00 \text{ m/s}^2)\hat{i} - (10.4 \text{ m/s}^2)\hat{j}.$$

Therefore,

$$\begin{aligned}\vec{F}_2 &= (2.00 \text{ kg}) (-6.00 \text{ m/s}^2)\hat{i} + (2.00 \text{ kg}) (-10.4 \text{ m/s}^2)\hat{j} - (20.0 \text{ N})\hat{i} \\ &= (-32.0 \text{ N})\hat{i} - (20.8 \text{ N})\hat{j}.\end{aligned}$$

(b) The magnitude of  $\vec{F}_2$  is

$$|\vec{F}_2| = \sqrt{F_{2x}^2 + F_{2y}^2} = \sqrt{(-32.0 \text{ N})^2 + (-20.8 \text{ N})^2} = 38.2 \text{ N}.$$

(c) The angle that  $\vec{F}_2$  makes with the positive  $x$  axis is found from

$$\tan \theta = (F_{2y}/F_{2x}) = [(-20.8 \text{ N})/(-32.0 \text{ N})] = 0.656.$$

Consequently, the angle is either  $33.0^\circ$  or  $33.0^\circ + 180^\circ = 213^\circ$ . Since both the  $x$  and  $y$  components are negative, the correct result is  $213^\circ$ . An alternative answer is  $213^\circ - 360^\circ = -147^\circ$ .

6. Since  $\vec{v} = \text{constant}$ , we have  $\vec{a} = 0$ , which implies

$$\vec{F}_{\text{net}} = \vec{F}_1 + \vec{F}_2 = m\vec{a} = 0 .$$

Thus, the other force must be

$$\vec{F}_2 = -\vec{F}_1 = (-2 \text{ N}) \hat{i} + (6 \text{ N}) \hat{j} .$$

7. The net force applied on the chopping block is  $\vec{F}_{\text{net}} = \vec{F}_1 + \vec{F}_2 + \vec{F}_3$ , where the vector addition is done using unit-vector notation. The acceleration of the block is given by  $\vec{a} = (\vec{F}_1 + \vec{F}_2 + \vec{F}_3) / m$ .

(a) The forces exerted by the three astronauts can be expressed in unit-vector notation as follows:

$$\begin{aligned}\vec{F}_1 &= (32 \text{ N}) (\cos 30^\circ \hat{i} + \sin 30^\circ \hat{j}) = (27.7 \text{ N}) \hat{i} + (16 \text{ N}) \hat{j} \\ \vec{F}_2 &= (55 \text{ N}) (\cos 0^\circ \hat{i} + \sin 0^\circ \hat{j}) = (55 \text{ N}) \hat{i} \\ \vec{F}_3 &= (41 \text{ N}) (\cos(-60^\circ) \hat{i} + \sin(-60^\circ) \hat{j}) = (20.5 \text{ N}) \hat{i} - (35.5 \text{ N}) \hat{j}.\end{aligned}$$

The resultant acceleration of the asteroid of mass  $m = 120 \text{ kg}$  is therefore

$$\vec{a} = \frac{(27.7 \hat{i} + 16 \hat{j}) \text{ N} + (55 \hat{i}) \text{ N} + (20.5 \hat{i} - 35.5 \hat{j}) \text{ N}}{120 \text{ kg}} = (0.86 \text{ m/s}^2) \hat{i} - (0.16 \text{ m/s}^2) \hat{j}.$$

(b) The magnitude of the acceleration vector is

$$|\vec{a}| = \sqrt{a_x^2 + a_y^2} = \sqrt{(0.86 \text{ m/s}^2)^2 + (-0.16 \text{ m/s}^2)^2} = 0.88 \text{ m/s}^2.$$


(c) The vector  $\vec{a}$  makes an angle  $\theta$  with the  $+x$  axis, where

$$\theta = \tan^{-1} \left( \frac{a_y}{a_x} \right) = \tan^{-1} \left( \frac{-0.16 \text{ m/s}^2}{0.86 \text{ m/s}^2} \right) = -11^\circ.$$

8. Since the tire remains stationary, by Newton's second law, the net force must be zero:

$$\vec{F}_{\text{net}} = \vec{F}_A + \vec{F}_B + \vec{F}_C = m\vec{a} = 0.$$

From the free-body diagram shown on the right, we have

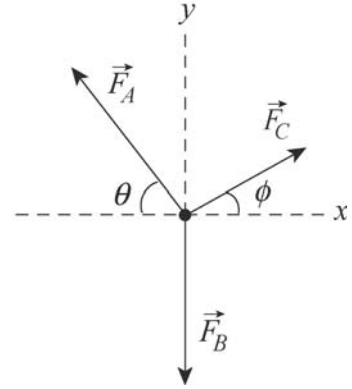

$$0 = \sum F_{\text{net},x} = F_C \cos \phi - F_A \cos \theta$$

$$0 = \sum F_{\text{net},y} = F_A \sin \theta + F_C \sin \phi - F_B$$

To solve for  $F_B$ , we first compute  $\phi$ . With  $F_A = 220 \text{ N}$ ,  $F_C = 170 \text{ N}$  and  $\theta = 47^\circ$ , we get

$$\cos \phi = \frac{F_A \cos \theta}{F_C} = \frac{(220 \text{ N}) \cos 47.0^\circ}{170 \text{ N}} = 0.883 \Rightarrow \phi = 28.0^\circ$$

Substituting the value into the second force equation, we find

$$F_B = F_A \sin \theta + F_C \sin \phi = (220 \text{ N}) \sin 47.0^\circ + (170 \text{ N}) \sin 28.0^\circ = 241 \text{ N}.$$

9. The velocity is the derivative (with respect to time) of given function  $x$ , and the acceleration is the derivative of the velocity. Thus,  $a = 2c - 3(2.0)(2.0)t$ , which we use in Newton's second law:  $F = (2.0 \text{ kg})a = 4.0c - 24t$  (with SI units understood). At  $t = 3.0 \text{ s}$ , we are told that  $F = -36 \text{ N}$ . Thus,  $-36 = 4.0c - 24(3.0)$  can be used to solve for  $c$ . The result is  $c = +9.0 \text{ m/s}^2$ .

10. To solve the problem, we note that acceleration is the second time derivative of the position function, and the net force is related to the acceleration via Newton's second law. Thus, differentiating

$$x(t) = -13.00 + 2.00t + 4.00t^2 - 3.00t^3$$

twice with respect to  $t$ , we get

$$\frac{dx}{dt} = 2.00 + 8.00t - 9.00t^2, \quad \frac{d^2x}{dt^2} = 8.00 - 18.0t$$

The net force acting on the particle at  $t = 3.40$  s is

$$\vec{F} = m \frac{d^2x}{dt^2} \hat{i} = (0.150)[8.00 - 18.0(3.40)]\hat{i} = (-7.98 \text{ N})\hat{i}$$

11. To solve the problem, we note that acceleration is the second time derivative of the position function; it is a vector and can be determined from its components. The net force is related to the acceleration via Newton's second law. Thus, differentiating  $x(t) = -15.0 + 2.00t + 4.00t^3$  twice with respect to  $t$ , we get

$$\frac{dx}{dt} = 2.00 - 12.0t^2, \quad \frac{d^2x}{dt^2} = -24.0t$$

Similarly, differentiating  $y(t) = 25.0 + 7.00t - 9.00t^2$  twice with respect to  $t$  yields

$$\frac{dy}{dt} = 7.00 - 18.0t, \quad \frac{d^2y}{dt^2} = -18.0$$

(a) The acceleration is

$$\vec{a} = a_x \hat{i} + a_y \hat{j} = \frac{d^2x}{dt^2} \hat{i} + \frac{d^2y}{dt^2} \hat{j} = (-24.0t) \hat{i} + (-18.0) \hat{j}.$$

At  $t = 0.700$  s, we have  $\vec{a} = (-16.8) \hat{i} + (-18.0) \hat{j}$  with a magnitude of

$$a = |\vec{a}| = \sqrt{(-16.8)^2 + (-18.0)^2} = 24.6 \text{ m/s}^2.$$

Thus, the magnitude of the force is  $F = ma = (0.34 \text{ kg})(24.6 \text{ m/s}^2) = 8.37 \text{ N}$ .

(b) The angle  $\vec{F}$  or  $\vec{a} = \vec{F}/m$  makes with  $+x$  is

$$\theta = \tan^{-1} \left( \frac{a_y}{a_x} \right) = \tan^{-1} \left( \frac{-18.0 \text{ m/s}^2}{-16.8 \text{ m/s}^2} \right) = 47.0^\circ \text{ or } -133^\circ.$$

We choose the latter ( $-133^\circ$ ) since  $\vec{F}$  is in the third quadrant.

(c) The direction of travel is the direction of a tangent to the path, which is the direction of the velocity vector:

$$\vec{v}(t) = v_x \hat{i} + v_y \hat{j} = \frac{dx}{dt} \hat{i} + \frac{dy}{dt} \hat{j} = (2.00 - 12.0t^2) \hat{i} + (7.00 - 18.0t) \hat{j}.$$

At  $t = 0.700$  s, we have  $\vec{v}(t = 0.700 \text{ s}) = (-3.88 \text{ m/s}) \hat{i} + (-5.60 \text{ m/s}) \hat{j}$ . Therefore, the angle  $\vec{v}$  makes with  $+x$  is

$$\theta_v = \tan^{-1} \left( \frac{v_y}{v_x} \right) = \tan^{-1} \left( \frac{-5.60 \text{ m/s}}{-3.88 \text{ m/s}} \right) = 55.3^\circ \text{ or } -125^\circ.$$

We choose the latter ( $-125^\circ$ ) since  $\vec{v}$  is in the third quadrant.



12. From the slope of the graph we find  $a_x = 3.0 \text{ m/s}^2$ . Applying Newton's second law to the  $x$  axis (and taking  $\theta$  to be the angle between  $F_1$  and  $F_2$ ), we have

$$F_1 + F_2 \cos \theta = m a_x \quad \Rightarrow \quad \theta = 56^\circ.$$

13. (a) – (c) In all three cases the scale is not accelerating, which means that the two cords exert forces of equal magnitude on it. The scale reads the magnitude of either of these forces. In each case the tension force of the cord attached to the salami must be the same in magnitude as the weight of the salami because the salami is not accelerating. Thus the scale reading is  $mg$ , where  $m$  is the mass of the salami. Its value is  $(11.0 \text{ kg})(9.8 \text{ m/s}^2) = 108 \text{ N}$ .

14. Three vertical forces are acting on the block: the earth pulls down on the block with gravitational force 3.0 N; a spring pulls up on the block with elastic force 1.0 N; and, the surface pushes up on the block with normal force  $F_N$ . There is no acceleration, so

$$\sum F_y = 0 = F_N + (1.0 \text{ N}) + (-3.0 \text{ N})$$

yields  $F_N = 2.0 \text{ N}$ .

(a) By Newton's third law, the force exerted by the block on the surface has that same magnitude but opposite direction: 2.0 N.

(b) The direction is down.

15. (a) From the fact that  $T_3 = 9.8 \text{ N}$ , we conclude the mass of disk  $D$  is  $1.0 \text{ kg}$ . Both this and that of disk  $C$  cause the tension  $T_2 = 49 \text{ N}$ , which allows us to conclude that disk  $C$  has a mass of  $4.0 \text{ kg}$ . The weights of these two disks plus that of disk  $B$  determine the tension  $T_1 = 58.8 \text{ N}$ , which leads to the conclusion that  $m_B = 1.0 \text{ kg}$ . The weights of all the disks must add to the  $98 \text{ N}$  force described in the problem; therefore, disk  $A$  has mass  $4.0 \text{ kg}$ .

(b)  $m_B = 1.0 \text{ kg}$ , as found in part (a).

(c)  $m_C = 4.0 \text{ kg}$ , as found in part (a).

(d)  $m_D = 1.0 \text{ kg}$ , as found in part (a).

16. (a) There are six legs, and the vertical component of the tension force in each leg is  $T \sin \theta$  where  $\theta = 40^\circ$ . For vertical equilibrium (zero acceleration in the  $y$  direction) then Newton's second law leads to

$$6T \sin \theta = mg \Rightarrow T = \frac{mg}{6 \sin \theta}$$

which (expressed as a multiple of the bug's weight  $mg$ ) gives roughly  $T / mg \approx 0.260$ .

(b) The angle  $\theta$  is measured from horizontal, so as the insect "straightens out the legs"  $\theta$  will increase (getting closer to  $90^\circ$ ), which causes  $\sin \theta$  to increase (getting closer to 1) and consequently (since  $\sin \theta$  is in the denominator) causes  $T$  to decrease.

17. (a) The coin undergoes free fall. Therefore, with respect to ground, its acceleration is

$$\vec{a}_{\text{coin}} = \vec{g} = (-9.8 \text{ m/s}^2)\hat{j}.$$

(b) Since the customer is being pulled down with an acceleration of  $\vec{a}'_{\text{customer}} = 1.24\vec{g} = (-12.15 \text{ m/s}^2)\hat{j}$ , the acceleration of the coin with respect to the customer is

$$\vec{a}_{\text{rel}} = \vec{a}_{\text{coin}} - \vec{a}'_{\text{customer}} = (-9.8 \text{ m/s}^2)\hat{j} - (-12.15 \text{ m/s}^2)\hat{j} = (+2.35 \text{ m/s}^2)\hat{j}.$$

(c) The time it takes for the coin to reach the ceiling is

$$t = \sqrt{\frac{2h}{a_{\text{rel}}}} = \sqrt{\frac{2(2.20 \text{ m})}{2.35 \text{ m/s}^2}} = 1.37 \text{ s}.$$

(d) Since gravity is the only force acting on the coin, the actual force on the coin is

$$\vec{F}_{\text{coin}} = m\vec{a}_{\text{coin}} = m\vec{g} = (0.567 \times 10^{-3} \text{ kg})(-9.8 \text{ m/s}^2)\hat{j} = (-5.56 \times 10^{-3} \text{ N})\hat{j}.$$

(e) In the customer's frame, the coin travels upward at a constant acceleration. Therefore, the apparent force on the coin is

$$\vec{F}_{\text{app}} = m\vec{a}_{\text{rel}} = (0.567 \times 10^{-3} \text{ kg})(+2.35 \text{ m/s}^2)\hat{j} = (+1.33 \times 10^{-3} \text{ N})\hat{j}.$$

18. We note that the rope is  $22.0^\circ$  from vertical – and therefore  $68.0^\circ$  from horizontal.

(a) With  $T = 760$  N, then its components are

$$\vec{T} = T \cos 68.0^\circ \hat{i} + T \sin 68.0^\circ \hat{j} = (285 \text{ N}) \hat{i} + (705 \text{ N}) \hat{j}.$$

(b) No longer in contact with the cliff, the only other force on Tarzan is due to earth's gravity (his weight). Thus,

$$\vec{F}_{\text{net}} = \vec{T} + \vec{W} = (285 \text{ N}) \hat{i} + (705 \text{ N}) \hat{j} - (820 \text{ N}) \hat{j} = (285 \text{ N}) \hat{i} - (115 \text{ N}) \hat{j}.$$

(c) In a manner that is efficiently implemented on a vector-capable calculator, we convert from rectangular ( $x, y$ ) components to magnitude-angle notation:

$$\vec{F}_{\text{net}} = (285, -115) \rightarrow (307 \angle -22.0^\circ)$$

so that the net force has a magnitude of 307 N.

(d) The angle (see part (c)) has been found to be  $-22.0^\circ$ , or  $22.0^\circ$  below horizontal (away from cliff).

(e) Since  $\vec{a} = \vec{F}_{\text{net}}/m$  where  $m = W/g = 83.7$  kg, we obtain  $\vec{a} = 3.67 \text{ m/s}^2$ .

(f) Eq. 5-1 requires that  $\vec{a} \parallel \vec{F}_{\text{net}}$  so that the angle is also  $-22.0^\circ$ , or  $22.0^\circ$  below horizontal (away from cliff).

19. (a) Since the acceleration of the block is zero, the components of the Newton's second law equation yield

$$\begin{aligned} T - mg \sin \theta &= 0 \\ F_N - mg \cos \theta &= 0. \end{aligned}$$

Solving the first equation for the tension in the string, we find

$$T = mg \sin \theta = (8.5 \text{ kg})(9.8 \text{ m/s}^2) \sin 30^\circ = 42 \text{ N}.$$

(b) We solve the second equation in part (a) for the normal force  $F_N$ :

$$F_N = mg \cos \theta = (8.5 \text{ kg})(9.8 \text{ m/s}^2) \cos 30^\circ = 72 \text{ N}.$$

(c) When the string is cut, it no longer exerts a force on the block and the block accelerates. The  $x$  component of the second law becomes  $-mg \sin \theta = ma$ , so the acceleration becomes

$$a = -g \sin \theta = -(9.8 \text{ m/s}^2) \sin 30^\circ = -4.9 \text{ m/s}^2.$$

The negative sign indicates the acceleration is down the plane. The magnitude of the acceleration is  $4.9 \text{ m/s}^2$ .



20. We take rightwards as the  $+x$  direction. Thus,  $\vec{F}_1 = (20 \text{ N})\hat{i}$ . In each case, we use Newton's second law  $\vec{F}_1 + \vec{F}_2 = m\vec{a}$  where  $m = 2.0 \text{ kg}$ .

(a) If  $\vec{a} = (+10 \text{ m/s}^2)\hat{i}$ , then the equation above gives  $\vec{F}_2 = 0$ .

(b) If  $\vec{a} = (+20 \text{ m/s}^2)\hat{i}$ , then that equation gives  $\vec{F}_2 = (20 \text{ N})\hat{i}$ .

(c) If  $\vec{a} = 0$ , then the equation gives  $\vec{F}_2 = (-20 \text{ N})\hat{i}$ .

(d) If  $\vec{a} = (-10 \text{ m/s}^2)\hat{i}$ , the equation gives  $\vec{F}_2 = (-40 \text{ N})\hat{i}$ .

(e) If  $\vec{a} = (-20 \text{ m/s}^2)\hat{i}$ , the equation gives  $\vec{F}_2 = (-60 \text{ N})\hat{i}$ .

21. (a) The slope of each graph gives the corresponding component of acceleration. Thus, we find  $a_x = 3.00 \text{ m/s}^2$  and  $a_y = -5.00 \text{ m/s}^2$ . The magnitude of the acceleration vector is therefore  $a = \sqrt{(3.00 \text{ m/s}^2)^2 + (-5.00 \text{ m/s}^2)^2} = 5.83 \text{ m/s}^2$ , and the force is obtained from this by multiplying with the mass ( $m = 2.00 \text{ kg}$ ). The result is  $F = ma = 11.7 \text{ N}$ .

(b) The direction of the force is the same as that of the acceleration:


$$\theta = \tan^{-1} [(-5.00 \text{ m/s}^2)/(3.00 \text{ m/s}^2)] = -59.0^\circ.$$

22. The free-body diagram of the cars is shown on the right. The force exerted by John Massis is

$$F = 2.5mg = 2.5(80 \text{ kg})(9.8 \text{ m/s}^2) = 1960 \text{ N} .$$

Since the motion is along the horizontal  $x$ -axis, using Newton's second law, we have  $F_x = F \cos \theta = Ma_x$ , where  $M$  is the total mass of the railroad cars. Thus, the acceleration of the cars is

$$a_x = \frac{F \cos \theta}{M} = \frac{(1960 \text{ N}) \cos 30^\circ}{(7.0 \times 10^5 \text{ N} / 9.8 \text{ m/s}^2)} = 0.024 \text{ m/s}^2 .$$



Using Eq. 2-16, the speed of the car at the end of the pull is

$$v_x = \sqrt{2a_x \Delta x} = \sqrt{2(0.024 \text{ m/s}^2)(1.0 \text{ m})} = 0.22 \text{ m/s} .$$

23. (a) The acceleration is

$$a = \frac{F}{m} = \frac{20 \text{ N}}{900 \text{ kg}} = 0.022 \text{ m/s}^2 .$$

(b) The distance traveled in 1 day (= 86400 s) is

$$s = \frac{1}{2}at^2 = \frac{1}{2} (0.0222 \text{ m/s}^2) (86400 \text{ s})^2 = 8.3 \times 10^7 \text{ m} .$$

(c) The speed it will be traveling is given by

$$v = at = (0.0222 \text{ m/s}^2)(86400 \text{ s}) = 1.9 \times 10^3 \text{ m/s} .$$

24. Some assumptions (not so much for realism but rather in the interest of using the given information efficiently) are needed in this calculation: we assume the fishing line and the path of the salmon are horizontal. Thus, the weight of the fish contributes only (via Eq. 5-12) to information about its mass ( $m = W/g = 8.7 \text{ kg}$ ). Our  $+x$  axis is in the direction of the salmon's velocity (away from the fisherman), so that its acceleration ("deceleration") is negative-valued and the force of tension is in the  $-x$  direction:  $\vec{T} = -T$ . We use Eq. 2-16 and SI units (noting that  $v = 0$ ).

$$v^2 = v_0^2 + 2a\Delta x \Rightarrow a = -\frac{v_0^2}{2\Delta x} = -\frac{(2.8 \text{ m/s})^2}{2(0.11 \text{ m})} = -36 \text{ m/s}^2.$$

Assuming there are no significant horizontal forces other than the tension, Eq. 5-1 leads to

$$\vec{T} = m\vec{a} \Rightarrow -T = (8.7 \text{ kg})(-36 \text{ m/s}^2)$$

which results in  $T = 3.1 \times 10^2 \text{ N}$ .

25. In terms of magnitudes, Newton's second law is  $F = ma$ , where  $F = |\vec{F}_{\text{net}}|$ ,  $a = |\vec{a}|$ , and  $m$  is the (always positive) mass. The magnitude of the acceleration can be found using constant acceleration kinematics (Table 2-1). Solving  $v = v_0 + at$  for the case where it starts from rest, we have  $a = v/t$  (which we interpret in terms of magnitudes, making specification of coordinate directions unnecessary). The velocity is

$$v = (1600 \text{ km/h}) (1000 \text{ m/km}) / (3600 \text{ s/h}) = 444 \text{ m/s},$$

so

$$F = ma = m \frac{v}{t} = (500 \text{ kg}) \frac{444 \text{ m/s}}{1.8 \text{ s}} = 1.2 \times 10^5 \text{ N}.$$

26. The stopping force  $\vec{F}$  and the path of the passenger are horizontal. Our  $+x$  axis is in the direction of the passenger's motion, so that the passenger's acceleration ("deceleration") is negative-valued and the stopping force is in the  $-x$  direction:  $\vec{F} = -F\hat{i}$ . Using Eq. 2-16 with

$$v_0 = (53 \text{ km/h})(1000 \text{ m/km})/(3600 \text{ s/h}) = 14.7 \text{ m/s}$$

and  $v = 0$ , the acceleration is found to be

$$v^2 = v_0^2 + 2a\Delta x \Rightarrow a = -\frac{v_0^2}{2\Delta x} = -\frac{(14.7 \text{ m/s})^2}{2(0.65 \text{ m})} = -167 \text{ m/s}^2.$$

Assuming there are no significant horizontal forces other than the stopping force, Eq. 5-1 leads to

$$\vec{F} = m\vec{a} \Rightarrow -F = (41 \text{ kg})(-167 \text{ m/s}^2)$$

which results in  $F = 6.8 \times 10^3 \text{ N}$ .

27. We choose up as the  $+y$  direction, so  $\vec{a} = (-3.00 \text{ m/s}^2)\hat{j}$  (which, without the unit-vector, we denote as  $a$  since this is a 1-dimensional problem in which Table 2-1 applies). From Eq. 5-12, we obtain the firefighter's mass:  $m = W/g = 72.7 \text{ kg}$ .

(a) We denote the force exerted by the pole on the firefighter  $\vec{F}_{fp} = F_{fp} \hat{j}$  and apply Eq.

5-1. Since  $\vec{F}_{\text{net}} = m\vec{a}$ , we have

$$F_{fp} - F_g = ma \Rightarrow F_{fp} - 712 \text{ N} = (72.7 \text{ kg})(-3.00 \text{ m/s}^2)$$

which yields  $F_{fp} = 494 \text{ N}$ .

(b) The fact that the result is positive means  $\vec{F}_{fp}$  points up.

(c) Newton's third law indicates  $\vec{F}_{fp} = -\vec{F}_{pf}$ , which leads to the conclusion that  $|\vec{F}_{pf}| = 494 \text{ N}$ .

(d) The direction of  $\vec{F}_{pf}$  is down.



28. The stopping force  $\vec{F}$  and the path of the toothpick are horizontal. Our  $+x$  axis is in the direction of the toothpick's motion, so that the toothpick's acceleration ("deceleration") is negative-valued and the stopping force is in the  $-x$  direction:  $\vec{F} = -F\hat{i}$ . Using Eq. 2-16 with  $v_0 = 220$  m/s and  $v = 0$ , the acceleration is found to be

$$v^2 = v_0^2 + 2a\Delta x \Rightarrow a = -\frac{v_0^2}{2\Delta x} = -\frac{(220 \text{ m/s})^2}{2(0.015 \text{ m})} = -1.61 \times 10^6 \text{ m/s}^2.$$

Thus, the magnitude of the force exerted by the branch on the toothpick is

$$F = m|a| = (1.3 \times 10^{-4} \text{ kg})(1.61 \times 10^6 \text{ m/s}^2) = 2.1 \times 10^2 \text{ N}.$$

29. The acceleration of the electron is vertical and for all practical purposes the only force acting on it is the electric force. The force of gravity is negligible. We take the  $+x$  axis to be in the direction of the initial velocity and the  $+y$  axis to be in the direction of the electrical force, and place the origin at the initial position of the electron. Since the force and acceleration are constant, we use the equations from Table 2-1:  $x = v_0 t$  and

$$y = \frac{1}{2} a t^2 = \frac{1}{2} \left( \frac{F}{m} \right) t^2 .$$

The time taken by the electron to travel a distance  $x$  ( $= 30$  mm) horizontally is  $t = x/v_0$  and its deflection in the direction of the force is

$$y = \frac{1}{2} \frac{F}{m} \left( \frac{x}{v_0} \right)^2 = \frac{1}{2} \left( \frac{4.5 \times 10^{-16} \text{ N}}{9.11 \times 10^{-31} \text{ kg}} \right) \left( \frac{30 \times 10^{-3} \text{ m}}{1.2 \times 10^7 \text{ m/s}} \right)^2 = 1.5 \times 10^{-3} \text{ m} .$$

30. The stopping force  $\vec{F}$  and the path of the car are horizontal. Thus, the weight of the car contributes only (via Eq. 5-12) to information about its mass ( $m = W/g = 1327 \text{ kg}$ ). Our  $+x$  axis is in the direction of the car's velocity, so that its acceleration ("deceleration") is negative-valued and the stopping force is in the  $-x$  direction:  $\vec{F} = -F \hat{i}$ .

(a) We use Eq. 2-16 and SI units (noting that  $v = 0$  and  $v_0 = 40(1000/3600) = 11.1 \text{ m/s}$ ).

$$v^2 = v_0^2 + 2a\Delta x \Rightarrow a = -\frac{v_0^2}{2\Delta x} = -\frac{(11.1 \text{ m/s})^2}{2(15 \text{ m})}$$

which yields  $a = -4.12 \text{ m/s}^2$ . Assuming there are no significant horizontal forces other than the stopping force, Eq. 5-1 leads to

$$\vec{F} = m\vec{a} \Rightarrow -F = (1327 \text{ kg})(-4.12 \text{ m/s}^2)$$

which results in  $F = 5.5 \times 10^3 \text{ N}$ .

(b) Eq. 2-11 readily yields  $t = -v_0/a = 2.7 \text{ s}$ .

(c) Keeping  $F$  the same means keeping  $a$  the same, in which case (since  $v = 0$ ) Eq. 2-16 expresses a direct proportionality between  $\Delta x$  and  $v_0^2$ . Therefore, doubling  $v_0$  means quadrupling  $\Delta x$ . That is, the new over the old stopping distances is a factor of 4.0.

(d) Eq. 2-11 illustrates a direct proportionality between  $t$  and  $v_0$  so that doubling one means doubling the other. That is, the new time of stopping is a factor of 2.0 greater than the one found in part (b).

31. The acceleration vector as a function of time is

$$\vec{a} = \frac{d\vec{v}}{dt} = \frac{d}{dt} (8.00t \hat{i} + 3.00t^2 \hat{j}) \text{ m/s} = (8.00 \hat{i} + 6.00t \hat{j}) \text{ m/s}^2.$$

(a) The magnitude of the force acting on the particle is

$$F = ma = m |\vec{a}| = (3.00) \sqrt{(8.00)^2 + (6.00t)^2} = (3.00) \sqrt{64.0 + 36.0 t^2} \text{ N}.$$

Thus,  $F = 35.0 \text{ N}$  corresponds to  $t = 1.415 \text{ s}$ , and the acceleration vector at this instant is

$$\vec{a} = [8.00 \hat{i} + 6.00(1.415) \hat{j}] \text{ m/s}^2 = (8.00 \text{ m/s}^2) \hat{i} + (8.49 \text{ m/s}^2) \hat{j}.$$

The angle  $\vec{a}$  makes with  $+x$  is

$$\theta_a = \tan^{-1} \left( \frac{a_y}{a_x} \right) = \tan^{-1} \left( \frac{8.49 \text{ m/s}^2}{8.00 \text{ m/s}^2} \right) = 46.7^\circ.$$

(b) The velocity vector at  $t = 1.415 \text{ s}$  is

$$\vec{v} = [8.00(1.415) \hat{i} + 3.00(1.415)^2 \hat{j}] \text{ m/s} = (11.3 \text{ m/s}) \hat{i} + (6.01 \text{ m/s}) \hat{j}.$$

Therefore, the angle  $\vec{v}$  makes with  $+x$  is


$$\theta_v = \tan^{-1} \left( \frac{v_y}{v_x} \right) = \tan^{-1} \left( \frac{6.01 \text{ m/s}}{11.3 \text{ m/s}} \right) = 28.0^\circ.$$

32. We resolve this horizontal force into appropriate components.

(a) Newton's second law applied to the  $x$ -axis produces

$$F \cos \theta - mg \sin \theta = ma.$$

For  $a = 0$ , this yields  $F = 566 \text{ N}$ .

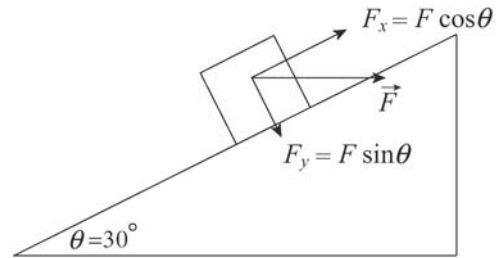

(b) Applying Newton's second law to the  $y$  axis (where there is no acceleration), we have

$$F_N - F \sin \theta - mg \cos \theta = 0$$

which yields the normal force  $F_N = 1.13 \times 10^3 \text{ N}$ .

33. (a) Since friction is negligible the force of the girl is the only horizontal force on the sled. The vertical forces (the force of gravity and the normal force of the ice) sum to zero. The acceleration of the sled is

$$a_s = \frac{F}{m_s} = \frac{5.2 \text{ N}}{8.4 \text{ kg}} = 0.62 \text{ m/s}^2 .$$

(b) According to Newton's third law, the force of the sled on the girl is also 5.2 N. Her acceleration is

$$a_g = \frac{F}{m_g} = \frac{5.2 \text{ N}}{40 \text{ kg}} = 0.13 \text{ m/s}^2 .$$

(c) The accelerations of the sled and girl are in opposite directions. Assuming the girl starts at the origin and moves in the  $+x$  direction, her coordinate is given by  $x_g = \frac{1}{2} a_g t^2$ . The sled starts at  $x_0 = 15 \text{ m}$  and moves in the  $-x$  direction. Its coordinate is given by  $x_s = x_0 - \frac{1}{2} a_s t^2$ . They meet when  $x_g = x_s$ , or

$$\frac{1}{2} a_g t^2 = x_0 - \frac{1}{2} a_s t^2 .$$

This occurs at time

$$t = \sqrt{\frac{2x_0}{a_g + a_s}} .$$

By then, the girl has gone the distance

$$x_g = \frac{1}{2} a_g t^2 = \frac{x_0 a_g}{a_g + a_s} = \frac{(15 \text{ m})(0.13 \text{ m/s}^2)}{0.13 \text{ m/s}^2 + 0.62 \text{ m/s}^2} = 2.6 \text{ m} .$$

34. (a) Using notation suitable to a vector capable calculator, the  $\vec{F}_{\text{net}} = 0$  condition becomes

$$\vec{F}_1 + \vec{F}_2 + \vec{F}_3 = (6.00 \angle 150^\circ) + (7.00 \angle -60.0^\circ) + \vec{F}_3 = 0.$$


Thus,  $\vec{F}_3 = (1.70 \text{ N}) \hat{i} + (3.06 \text{ N}) \hat{j}$ .

(b) A constant velocity condition requires zero acceleration, so the answer is the same.

(c) Now, the acceleration is  $\vec{a} = (13.0 \text{ m/s}^2) \hat{i} - (14.0 \text{ m/s}^2) \hat{j}$ . Using  $\vec{F}_{\text{net}} = m \vec{a}$  (with  $m = 0.025 \text{ kg}$ ) we now obtain

$$\vec{F}_3 = (2.02 \text{ N}) \hat{i} + (2.71 \text{ N}) \hat{j}.$$

35. The free-body diagram is shown next.  $\vec{F}_N$  is the normal force of the plane on the block and  $m\vec{g}$  is the force of gravity on the block. We take the  $+x$  direction to be down the incline, in the direction of the acceleration, and the  $+y$  direction to be in the direction of the normal force exerted by the incline on the block. The  $x$  component of Newton's second law is then  $mg \sin \theta = ma$ ; thus, the acceleration is  $a = g \sin \theta$ .

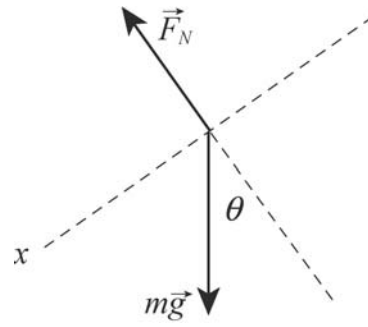

(a) Placing the origin at the bottom of the plane, the kinematic equations (Table 2-1) for motion along the  $x$  axis which we will use are  $v^2 = v_0^2 + 2ax$  and  $v = v_0 + at$ . The block momentarily stops at its highest point, where  $v = 0$ ; according to the second equation, this occurs at time  $t = -v_0/a$ . The position where it stops is

$$x = -\frac{1}{2} \frac{v_0^2}{a} = -\frac{1}{2} \left( \frac{(-3.50 \text{ m/s})^2}{(9.8 \text{ m/s}^2) \sin 32.0^\circ} \right) = -1.18 \text{ m},$$

or  $|x| = 1.18 \text{ m}$ .

(b) The time is

$$t = \frac{v_0}{a} = -\frac{v_0}{g \sin \theta} = -\frac{-3.50 \text{ m/s}}{(9.8 \text{ m/s}^2) \sin 32.0^\circ} = 0.674 \text{ s}.$$

(c) That the return-speed is identical to the initial speed is to be expected since there are no dissipative forces in this problem. In order to prove this, one approach is to set  $x = 0$  and solve  $x = v_0 t + \frac{1}{2} at^2$  for the total time (up and back down)  $t$ . The result is


$$t = -\frac{2v_0}{a} = -\frac{2v_0}{g \sin \theta} = -\frac{2(-3.50 \text{ m/s})}{(9.8 \text{ m/s}^2) \sin 32.0^\circ} = 1.35 \text{ s}.$$

The velocity when it returns is therefore

$$v = v_0 + at = v_0 + gt \sin \theta = -3.50 \text{ m/s} + (9.8 \text{ m/s}^2)(1.35 \text{ s}) \sin 32^\circ = 3.50 \text{ m/s}.$$



36. We label the 40 kg skier “ $m$ ” which is represented as a block in the figure shown. The force of the wind is denoted  $\vec{F}_w$  and might be either “uphill” or “downhill” (it is shown uphill in our sketch). The incline angle  $\theta$  is  $10^\circ$ . The  $-x$  direction is downhill.

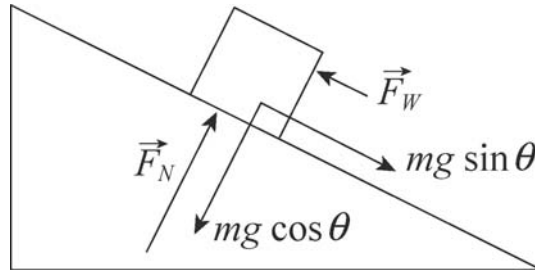

(a) Constant velocity implies zero acceleration; thus, application of Newton’s second law along the  $x$  axis leads to

$$mg \sin \theta - F_w = 0 .$$

This yields  $F_w = 68 \text{ N}$  (uphill).

(b) Given our coordinate choice, we have  $a = |a| = 1.0 \text{ m/s}^2$ . Newton’s second law

$$mg \sin \theta - F_w = ma$$

now leads to  $F_w = 28 \text{ N}$  (uphill).

(c) Continuing with the forces as shown in our figure, the equation

$$mg \sin \theta - F_w = ma$$

will lead to  $F_w = -12 \text{ N}$  when  $|a| = 2.0 \text{ m/s}^2$ . This simply tells us that the wind is opposite to the direction shown in our sketch; in other words,  $\vec{F}_w = 12 \text{ N}$  downhill.

37. The solutions to parts (a) and (b) have been combined here. The free-body diagram is shown below, with the tension of the string  $\vec{T}$ , the force of gravity  $m\vec{g}$ , and the force of the air  $\vec{F}$ . Our coordinate system is shown. Since the sphere is motionless the net force on it is zero, and the  $x$  and the  $y$  components of the equations are:


$$\begin{aligned} T \sin \theta - F &= 0 \\ T \cos \theta - mg &= 0, \end{aligned}$$

where  $\theta = 37^\circ$ . We answer the questions in the reverse order. Solving  $T \cos \theta - mg = 0$  for the tension, we obtain

$$T = mg / \cos \theta = (3.0 \times 10^{-4} \text{ kg}) (9.8 \text{ m/s}^2) / \cos 37^\circ = 3.7 \times 10^{-3} \text{ N}.$$

Solving  $T \sin \theta - F = 0$  for the force of the air:

$$F = T \sin \theta = (3.7 \times 10^{-3} \text{ N}) \sin 37^\circ = 2.2 \times 10^{-3} \text{ N}.$$

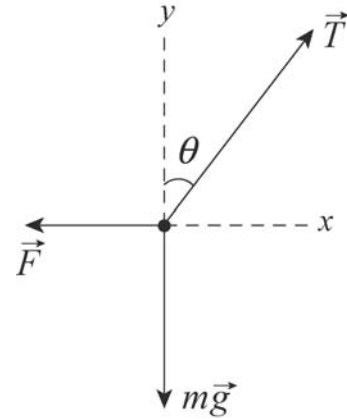

38. The acceleration of an object (neither pushed nor pulled by any force other than gravity) on a smooth inclined plane of angle  $\theta$  is  $a = -g\sin\theta$ . The slope of the graph shown with the problem statement indicates  $a = -2.50 \text{ m/s}^2$ . Therefore, we find  $\theta = 14.8^\circ$ . Examining the forces perpendicular to the incline (which must sum to zero since there is no component of acceleration in this direction) we find  $F_N = mg\cos\theta$ , where  $m = 5.00 \text{ kg}$ . Thus, the normal (perpendicular) force exerted at the box/ramp interface is 47.4 N.

39. The free-body diagram is shown below. Let  $\vec{T}$  be the tension of the cable and  $m\vec{g}$  be the force of gravity. If the upward direction is positive, then Newton's second law is  $T - mg = ma$ , where  $a$  is the acceleration.

Thus, the tension is  $T = m(g + a)$ . We use constant acceleration kinematics (Table 2-1) to find the acceleration (where  $v = 0$  is the final velocity,  $v_0 = -12$  m/s is the initial velocity, and  $y = -42$  m is the coordinate at the stopping point). Consequently,  $v^2 = v_0^2 + 2ay$  leads to

$$a = -\frac{v_0^2}{2y} = -\frac{(-12 \text{ m/s})^2}{2(-42 \text{ m})} = 1.71 \text{ m/s}^2.$$

We now return to calculate the tension:

$$\begin{aligned} T &= m(g + a) \\ &= (1600 \text{ kg}) (9.8 \text{ m/s}^2 + 1.71 \text{ m/s}^2) \\ &= 1.8 \times 10^4 \text{ N} . \end{aligned}$$



40. (a) Constant velocity implies zero acceleration, so the “uphill” force must equal (in magnitude) the “downhill” force:  $T = mg \sin \theta$ . Thus, with  $m = 50 \text{ kg}$  and  $\theta = 8.0^\circ$ , the tension in the rope equals 68 N.

(b) With an uphill acceleration of  $0.10 \text{ m/s}^2$ , Newton’s second law (applied to the  $x$  axis) yields

$$T - mg \sin \theta = ma \Rightarrow T - (50 \text{ kg})(9.8 \text{ m/s}^2) \sin 8.0^\circ = (50 \text{ kg})(0.10 \text{ m/s}^2)$$

which leads to  $T = 73 \text{ N}$ .

41. (a) The mass of the elevator is  $m = (27800/9.80) = 2837$  kg and (with +y upward) the acceleration is  $a = +1.22$  m/s<sup>2</sup>. Newton's second law leads to

$$T - mg = ma \Rightarrow T = m(g + a)$$

which yields  $T = 3.13 \times 10^4$  N for the tension.

(b) The term “deceleration” means the acceleration vector is in the direction opposite to the velocity vector (which the problem tells us is upward). Thus (with +y upward) the acceleration is now  $a = -1.22$  m/s<sup>2</sup>, so that the tension is

$$T = m(g + a) = 2.43 \times 10^4 \text{ N}.$$

42. (a) The term “deceleration” means the acceleration vector is in the direction opposite to the velocity vector (which the problem tells us is downward). Thus (with +y upward) the acceleration is  $a = +2.4 \text{ m/s}^2$ . Newton’s second law leads to

$$T - mg = ma \Rightarrow m = \frac{T}{g + a}$$

which yields  $m = 7.3 \text{ kg}$  for the mass.

(b) Repeating the above computation (now to solve for the tension) with  $a = +2.4 \text{ m/s}^2$  will, of course, lead us right back to  $T = 89 \text{ N}$ . Since the direction of the velocity did not enter our computation, this is to be expected.

43. The mass of the bundle is  $m = (449 \text{ N})/(9.80 \text{ m/s}^2) = 45.8 \text{ kg}$  and we choose +y upward.

(a) Newton's second law, applied to the bundle, leads to

$$T - mg = ma \Rightarrow a = \frac{387 \text{ N} - 449 \text{ N}}{45.8 \text{ kg}}$$

which yields  $a = -1.4 \text{ m/s}^2$  (or  $|a| = 1.4 \text{ m/s}^2$ ) for the acceleration. The minus sign in the result indicates the acceleration vector points down. Any downward acceleration of magnitude greater than this is also acceptable (since that would lead to even smaller values of tension).

(b) We use Eq. 2-16 (with  $\Delta x$  replaced by  $\Delta y = -6.1 \text{ m}$ ). We assume  $v_0 = 0$ .

$$|v| = \sqrt{2a\Delta y} = \sqrt{2(-1.35 \text{ m/s}^2)(-6.1 \text{ m})} = 4.1 \text{ m/s}.$$

For downward accelerations greater than  $1.4 \text{ m/s}^2$ , the speeds at impact will be larger than  $4.1 \text{ m/s}$ .



44. With  $a_{ce}$  meaning “the acceleration of the coin relative to the elevator” and  $a_{eg}$  meaning “the acceleration of the elevator relative to the ground”, we have

$$a_{ce} + a_{eg} = a_{cg} \Rightarrow -8.00 \text{ m/s}^2 + a_{eg} = -9.80 \text{ m/s}^2$$

which leads to  $a_{eg} = -1.80 \text{ m/s}^2$ . We have chosen upward as the positive  $y$  direction. Then Newton’s second law (in the “ground” reference frame) yields  $T - mg = ma_{eg}$ , or

$$T = mg + ma_{eg} = m(g + a_{eg}) = (2000 \text{ kg})(8.00 \text{ m/s}^2) = 16.0 \text{ kN}.$$

45. (a) The links are numbered from bottom to top. The forces on the bottom link are the force of gravity  $m\vec{g}$ , downward, and the force  $\vec{F}_{2\text{on}1}$  of link 2, upward. Take the positive direction to be upward. Then Newton's second law for this link is  $F_{2\text{on}1} - mg = ma$ . Thus,

$$F_{2\text{on}1} = m(a + g) = (0.100 \text{ kg}) (2.50 \text{ m/s}^2 + 9.80 \text{ m/s}^2) = 1.23 \text{ N}.$$

(b) The forces on the second link are the force of gravity  $m\vec{g}$ , downward, the force  $\vec{F}_{1\text{on}2}$  of link 1, downward, and the force  $\vec{F}_{3\text{on}2}$  of link 3, upward. According to Newton's third law  $\vec{F}_{1\text{on}2}$  has the same magnitude as  $\vec{F}_{2\text{on}1}$ . Newton's second law for the second link is  $F_{3\text{on}2} - F_{1\text{on}2} - mg = ma$ , so

$$F_{3\text{on}2} = m(a + g) + F_{1\text{on}2} = (0.100 \text{ kg}) (2.50 \text{ m/s}^2 + 9.80 \text{ m/s}^2) + 1.23 \text{ N} = 2.46 \text{ N}.$$

(c) Newton's second for link 3 is  $F_{4\text{on}3} - F_{2\text{on}3} - mg = ma$ , so

$$F_{4\text{on}3} = m(a + g) + F_{2\text{on}3} = (0.100 \text{ N}) (2.50 \text{ m/s}^2 + 9.80 \text{ m/s}^2) + 2.46 \text{ N} = 3.69 \text{ N},$$

where Newton's third law implies  $F_{2\text{on}3} = F_{3\text{on}2}$  (since these are magnitudes of the force vectors).

(d) Newton's second law for link 4 is  $F_{5\text{on}4} - F_{3\text{on}4} - mg = ma$ , so

$$F_{5\text{on}4} = m(a + g) + F_{3\text{on}4} = (0.100 \text{ kg}) (2.50 \text{ m/s}^2 + 9.80 \text{ m/s}^2) + 3.69 \text{ N} = 4.92 \text{ N},$$

where Newton's third law implies  $F_{3\text{on}4} = F_{4\text{on}3}$ .

(e) Newton's second law for the top link is  $F - F_{4\text{on}5} - mg = ma$ , so

$$F = m(a + g) + F_{4\text{on}5} = (0.100 \text{ kg}) (2.50 \text{ m/s}^2 + 9.80 \text{ m/s}^2) + 4.92 \text{ N} = 6.15 \text{ N},$$

where  $F_{4\text{on}5} = F_{5\text{on}4}$  by Newton's third law.

(f) Each link has the same mass and the same acceleration, so the same net force acts on each of them:

$$F_{\text{net}} = ma = (0.100 \text{ kg}) (2.50 \text{ m/s}^2) = 0.250 \text{ N}.$$

46. Applying Newton's second law to cab  $B$  (of mass  $m$ ) we have  $a = \frac{T}{m} - g = 4.89 \text{ m/s}^2$ .  
Next, we apply it to the box (of mass  $m_b$ ) to find the normal force:

$$F_N = m_b(g + a) = 176 \text{ N}.$$

47. The free-body diagram (not to scale) for the block is shown below.  $\vec{F}_N$  is the normal force exerted by the floor and  $m\vec{g}$  is the force of gravity.

(a) The  $x$  component of Newton's second law is  $F \cos \theta = ma$ , where  $m$  is the mass of the block and  $a$  is the  $x$  component of its acceleration. We obtain

$$a = \frac{F \cos \theta}{m} = \frac{(12.0 \text{ N}) \cos 25.0^\circ}{5.00 \text{ kg}} = 2.18 \text{ m/s}^2.$$

This is its acceleration provided it remains in contact with the floor. Assuming it does, we find the value of  $F_N$  (and if  $F_N$  is positive, then the assumption is true but if  $F_N$  is negative then the block leaves the floor). The  $y$  component of Newton's second law becomes

$$F_N + F \sin \theta - mg = 0,$$

so

$$F_N = mg - F \sin \theta = (5.00 \text{ kg})(9.80 \text{ m/s}^2) - (12.0 \text{ N}) \sin 25.0^\circ = 43.9 \text{ N}.$$


Hence the block remains on the floor and its acceleration is  $a = 2.18 \text{ m/s}^2$ .

(b) If  $F$  is the minimum force for which the block leaves the floor, then  $F_N = 0$  and the  $y$  component of the acceleration vanishes. The  $y$  component of the second law becomes

$$F \sin \theta - mg = 0 \Rightarrow F = \frac{mg}{\sin \theta} = \frac{(5.00 \text{ kg})(9.80 \text{ m/s}^2)}{\sin 25.0^\circ} = 116 \text{ N}.$$

(c) The acceleration is still in the  $x$  direction and is still given by the equation developed in part (a):

$$a = \frac{F \cos \theta}{m} = \frac{(116 \text{ N}) \cos 25.0^\circ}{5.00 \text{ kg}} = 21.0 \text{ m/s}^2.$$

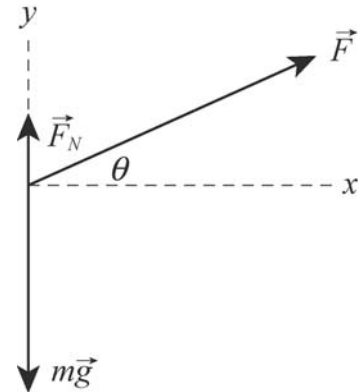

48. The direction of motion (the direction of the barge's acceleration) is  $+\hat{i}$ , and  $+\hat{j}$  is chosen so that the pull  $\vec{F}_h$  from the horse is in the first quadrant. The components of the unknown force of the water are denoted simply  $F_x$  and  $F_y$ .

(a) Newton's second law applied to the barge, in the  $x$  and  $y$  directions, leads to

$$(7900\text{ N})\cos 18^\circ + F_x = ma$$

$$(7900\text{ N})\sin 18^\circ + F_y = 0$$

respectively. Plugging in  $a = 0.12 \text{ m/s}^2$  and  $m = 9500 \text{ kg}$ , we obtain  $F_x = -6.4 \times 10^3 \text{ N}$  and  $F_y = -2.4 \times 10^3 \text{ N}$ . The magnitude of the force of the water is therefore

$$F_{\text{water}} = \sqrt{F_x^2 + F_y^2} = 6.8 \times 10^3 \text{ N}.$$

(b) Its angle measured from  $+\hat{i}$  is either

$$\tan^{-1} \left( \frac{F_y}{F_x} \right) = +21^\circ \text{ or } 201^\circ.$$

The signs of the components indicate the latter is correct, so  $\vec{F}_{\text{water}}$  is at  $201^\circ$  measured counterclockwise from the line of motion ( $+x$  axis).

49. Using Eq. 4-26, the launch speed of the projectile is

$$v_0 = \sqrt{\frac{gR}{\sin 2\theta}} = \sqrt{\frac{(9.8 \text{ m/s}^2)(69 \text{ m})}{\sin 2(53^\circ)}} = 26.52 \text{ m/s}.$$

The horizontal and vertical components of the speed are

$$v_x = v_0 \cos \theta = (26.52 \text{ m/s}) \cos 53^\circ = 15.96 \text{ m/s}$$

$$v_y = v_0 \sin \theta = (26.52 \text{ m/s}) \sin 53^\circ = 21.18 \text{ m/s}.$$

Since the acceleration is constant, we can use Eq. 2-16 to analyze the motion. The component of the acceleration in the horizontal direction is

$$a_x = \frac{v_x^2}{2x} = \frac{(15.96 \text{ m/s})^2}{2(5.2 \text{ m}) \cos 53^\circ} = 40.7 \text{ m/s}^2,$$

and the force component is  $F_x = ma_x = (85 \text{ kg})(40.7 \text{ m/s}^2) = 3460 \text{ N}$ . Similarly, in the vertical direction, we have

$$a_y = \frac{v_y^2}{2y} = \frac{(21.18 \text{ m/s})^2}{2(5.2 \text{ m}) \sin 53^\circ} = 54.0 \text{ m/s}^2.$$

and the force component is

$$F_y = ma_y + mg = (85 \text{ kg})(54.0 \text{ m/s}^2 + 9.80 \text{ m/s}^2) = 5424 \text{ N}.$$

Thus, the magnitude of the force is

$$F = \sqrt{F_x^2 + F_y^2} = \sqrt{(3460 \text{ N})^2 + (5424 \text{ N})^2} = 6434 \text{ N} \approx 6.4 \times 10^3 \text{ N},$$

to two significant figures.

50. First, we consider all the penguins (1 through 4, counting left to right) as one system, to which we apply Newton's second law:

$$T_4 = (m_1 + m_2 + m_3 + m_4)a \Rightarrow 222\text{N} = (12\text{kg} + m_2 + 15\text{kg} + 20\text{kg})a.$$

Second, we consider penguins 3 and 4 as one system, for which we have

$$\begin{aligned} T_4 - T_2 &= (m_3 + m_4)a \\ 111\text{N} &= (15\text{kg} + 20\text{kg})a \Rightarrow a = 3.2\text{ m/s}^2. \end{aligned}$$

Substituting the value, we obtain  $m_2 = 23\text{ kg}$ .

51. We apply Newton's second law first to the three blocks as a single system and then to the individual blocks. The  $+x$  direction is to the right in Fig. 5-49.

(a) With  $m_{\text{sys}} = m_1 + m_2 + m_3 = 67.0 \text{ kg}$ , we apply Eq. 5-2 to the  $x$  motion of the system – in which case, there is only one force  $\vec{T}_3 = +T_3 \hat{i}$ . Therefore,

$$T_3 = m_{\text{sys}} a \Rightarrow 65.0 \text{ N} = (67.0 \text{ kg})a$$

which yields  $a = 0.970 \text{ m/s}^2$  for the system (and for each of the blocks individually).

(b) Applying Eq. 5-2 to block 1, we find

$$T_1 = m_1 a = (12.0 \text{ kg})(0.970 \text{ m/s}^2) = 11.6 \text{ N}.$$

(c) In order to find  $T_2$ , we can either analyze the forces on block 3 or we can treat blocks 1 and 2 as a system and examine its forces. We choose the latter.

$$T_2 = (m_1 + m_2) a = (12.0 \text{ kg} + 24.0 \text{ kg})(0.970 \text{ m/s}^2) = 34.9 \text{ N}.$$




52. Both situations involve the same applied force and the same total mass, so the accelerations must be the same in both figures.

(a) The (direct) force causing  $B$  to have this acceleration in the first figure is twice as big as the (direct) force causing  $A$  to have that acceleration. Therefore,  $B$  has the twice the mass of  $A$ . Since their total is given as 12.0 kg then  $B$  has a mass of  $m_B = 8.00$  kg and  $A$  has mass  $m_A = 4.00$  kg. Considering the first figure,  $(20.0 \text{ N})/(8.00 \text{ kg}) = 2.50 \text{ m/s}^2$ . Of course, the same result comes from considering the second figure  $((10.0 \text{ N})/(4.00 \text{ kg}) = 2.50 \text{ m/s}^2)$ .

(b)  $F_a = (12.0 \text{ kg})(2.50 \text{ m/s}^2) = 30.0 \text{ N}$

53. The free-body diagrams for part (a) are shown below.  $\vec{F}$  is the applied force and  $\vec{f}$  is the force exerted by block 1 on block 2. We note that  $\vec{F}$  is applied directly to block 1 and that block 2 exerts the force  $-\vec{f}$  on block 1 (taking Newton's third law into account).

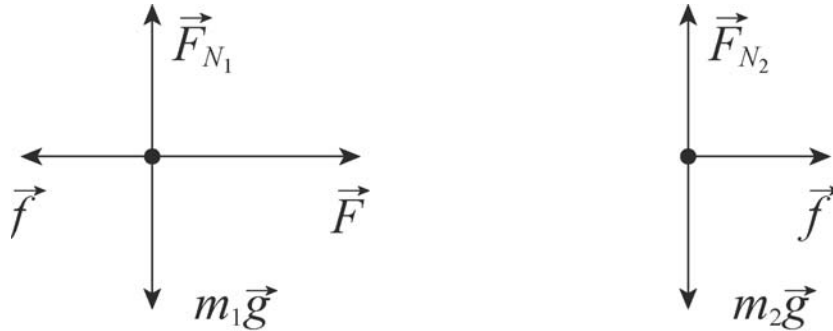

(a) Newton's second law for block 1 is  $F - f = m_1a$ , where  $a$  is the acceleration. The second law for block 2 is  $f = m_2a$ . Since the blocks move together they have the same acceleration and the same symbol is used in both equations. From the second equation we obtain the expression  $a = f/m_2$ , which we substitute into the first equation to get  $F - f = m_1f/m_2$ . Therefore,

$$f = \frac{Fm_2}{m_1 + m_2} = \frac{(3.2 \text{ N})(1.2 \text{ kg})}{2.3 \text{ kg} + 1.2 \text{ kg}} = 1.1 \text{ N} .$$

(b) If  $\vec{F}$  is applied to block 2 instead of block 1 (and in the opposite direction), the force of contact between the blocks is

$$f = \frac{Fm_1}{m_1 + m_2} = \frac{(3.2 \text{ N})(2.3 \text{ kg})}{2.3 \text{ kg} + 1.2 \text{ kg}} = 2.1 \text{ N} .$$

(c) We note that the acceleration of the blocks is the same in the two cases. In part (a), the force  $f$  is the only horizontal force on the block of mass  $m_2$  and in part (b)  $f$  is the only horizontal force on the block with  $m_1 > m_2$ . Since  $f = m_2a$  in part (a) and  $f = m_1a$  in part (b), then for the accelerations to be the same,  $f$  must be larger in part (b).

54. (a) The net force on the *system* (of total mass  $M = 80.0$  kg) is the force of gravity acting on the total overhanging mass ( $m_{BC} = 50.0$  kg). The magnitude of the acceleration is therefore  $a = (m_{BC} g)/M = 6.125$  m/s<sup>2</sup>. Next we apply Newton's second law to block *C* itself (choosing *down* as the  $+y$  direction) and obtain

$$m_C g - T_{BC} = m_C a.$$

This leads to  $T_{BC} = 36.8$  N.

(b) We use Eq. 2-15 (choosing *rightward* as the  $+x$  direction):  $\Delta x = 0 + \frac{1}{2} a t^2 = 0.191$  m.


55. The free-body diagrams for  $m_1$  and  $m_2$  are shown in the figures below. The only forces on the blocks are the upward tension  $\vec{T}$  and the downward gravitational forces  $\vec{F}_1 = m_1g$  and  $\vec{F}_2 = m_2g$ . Applying Newton's second law, we obtain:

$$T - m_1g = m_1a$$

$$m_2g - T = m_2a$$

which can be solved to yield

$$a = \left( \frac{m_2 - m_1}{m_2 + m_1} \right) g$$

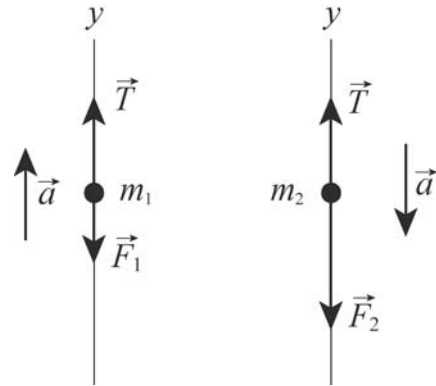

Substituting the result back, we have

$$T = \left( \frac{2m_1m_2}{m_1 + m_2} \right) g$$

(a) With  $m_1 = 1.3 \text{ kg}$  and  $m_2 = 2.8 \text{ kg}$ , the acceleration becomes

$$a = \left( \frac{2.80 \text{ kg} - 1.30 \text{ kg}}{2.80 \text{ kg} + 1.30 \text{ kg}} \right) (9.80 \text{ m/s}^2) = 3.59 \text{ m/s}^2.$$

(b) Similarly, the tension in the cord is

$$T = \frac{2(1.30 \text{ kg})(2.80 \text{ kg})}{1.30 \text{ kg} + 2.80 \text{ kg}} (9.80 \text{ m/s}^2) = 17.4 \text{ N}.$$

56. To solve the problem, we note that the acceleration along the slanted path depends on only the force components along the path, not the components perpendicular to the path. (a) From the free-body diagram shown, we see that the net force on the putting shot along the  $+x$ -axis is


$$F_{\text{net},x} = F - mg \sin \theta = 380.0 \text{ N} - (7.260 \text{ kg})(9.80 \text{ m/s}^2) \sin 30^\circ = 344.4 \text{ N},$$

which in turn gives

$$a_x = F_{\text{net},x} / m = (344.4 \text{ N}) / (7.260 \text{ kg}) = 47.44 \text{ m/s}^2.$$

Using Eq. 2-16 for constant-acceleration motion, the speed of the shot at the end of the acceleration phase is

$$v = \sqrt{v_0^2 + 2a_x \Delta x} = \sqrt{(2.500 \text{ m/s})^2 + 2(47.44 \text{ m/s}^2)(1.650 \text{ m})} = 12.76 \text{ m/s}.$$

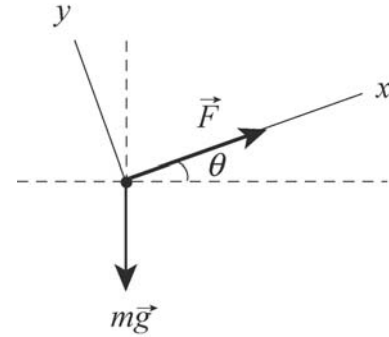

(b) If  $\theta = 42^\circ$ , then

$$a_x = \frac{F_{\text{net},x}}{m} = \frac{F - mg \sin \theta}{m} = \frac{380.0 \text{ N} - (7.260 \text{ kg})(9.80 \text{ m/s}^2) \sin 42.00^\circ}{7.260 \text{ kg}} = 45.78 \text{ m/s}^2,$$

and the final (launch) speed is

$$v = \sqrt{v_0^2 + 2a_x \Delta x} = \sqrt{(2.500 \text{ m/s})^2 + 2(45.78 \text{ m/s}^2)(1.650 \text{ m})} = 12.54 \text{ m/s}.$$

(c) The decrease in launch speed when changing the angle from  $30.00^\circ$  to  $42.00^\circ$  is

$$\frac{12.76 \text{ m/s} - 12.54 \text{ m/s}}{12.76 \text{ m/s}} = 0.0169 = 16.9\%.$$

57. We take +y to be up for both the monkey and the package.

(a) The force the monkey pulls downward on the rope has magnitude  $F$ . According to Newton's third law, the rope pulls upward on the monkey with a force of the same magnitude, so Newton's second law for forces acting on the monkey leads to

$$F - m_m g = m_m a_m,$$

where  $m_m$  is the mass of the monkey and  $a_m$  is its acceleration. Since the rope is massless  $F = T$  is the tension in the rope. The rope pulls upward on the package with a force of magnitude  $F$ , so Newton's second law for the package is

$$F + F_N - m_p g = m_p a_p,$$

where  $m_p$  is the mass of the package,  $a_p$  is its acceleration, and  $F_N$  is the normal force exerted by the ground on it. Now, if  $F$  is the minimum force required to lift the package, then  $F_N = 0$  and  $a_p = 0$ . According to the second law equation for the package, this means  $F = m_p g$ . Substituting  $m_p g$  for  $F$  in the equation for the monkey, we solve for  $a_m$ :

$$a_m = \frac{F - m_m g}{m_m} = \frac{(m_p - m_m)g}{m_m} = \frac{(15 \text{ kg} - 10 \text{ kg})(9.8 \text{ m/s}^2)}{10 \text{ kg}} = 4.9 \text{ m/s}^2.$$

(b) As discussed, Newton's second law leads to  $F - m_p g = m_p a_p$  for the package and  $F - m_m g = m_m a_m$  for the monkey. If the acceleration of the package is downward, then the acceleration of the monkey is upward, so  $a_m = -a_p$ . Solving the first equation for  $F$

$$F = m_p (g + a_p) = m_p (g - a_m)$$

and substituting this result into the second equation, we solve for  $a_m$ :

$$a_m = \frac{(m_p - m_m)g}{m_p + m_m} = \frac{(15 \text{ kg} - 10 \text{ kg})(9.8 \text{ m/s}^2)}{15 \text{ kg} + 10 \text{ kg}} = 2.0 \text{ m/s}^2.$$

(c) The result is positive, indicating that the acceleration of the monkey is upward.

(d) Solving the second law equation for the package, we obtain

$$F = m_p (g - a_m) = (15 \text{ kg})(9.8 \text{ m/s}^2 - 2.0 \text{ m/s}^2) = 120 \text{ N}.$$

58. Referring to Fig. 5-10(c) is helpful. In this case, viewing the man-rope-sandbag as a system means that we should be careful to choose a consistent positive direction of motion (though there are other ways to proceed – say, starting with individual application of Newton’s law to each mass). We take *down* as positive for the man’s motion and *up* as positive for the sandbag’s motion and, without ambiguity, denote their acceleration as  $a$ . The net force on the system is the different between the weight of the man and that of the sandbag. The system mass is  $m_{\text{sys}} = 85 \text{ kg} + 65 \text{ kg} = 150 \text{ kg}$ . Thus, Eq. 5-1 leads to

$$(85 \text{ kg})(9.8 \text{ m/s}^2) - (65 \text{ kg})(9.8 \text{ m/s}^2) = m_{\text{sys}} a$$


which yields  $a = 1.3 \text{ m/s}^2$ . Since the system starts from rest, Eq. 2-16 determines the speed (after traveling  $\Delta y = 10 \text{ m}$ ) as follows:

$$v = \sqrt{2a\Delta y} = \sqrt{2(1.3 \text{ m/s}^2)(10 \text{ m})} = 5.1 \text{ m/s}.$$

59. The free-body diagram for each block is shown below.  $T$  is the tension in the cord and  $\theta = 30^\circ$  is the angle of the incline. For block 1, we take the  $+x$  direction to be up the incline and the  $+y$  direction to be in the direction of the normal force  $\vec{F}_N$  that the plane exerts on the block. For block 2, we take the  $+y$  direction to be down. In this way, the accelerations of the two blocks can be represented by the same symbol  $a$ , without ambiguity. Applying Newton's second law to the  $x$  and  $y$  axes for block 1 and to the  $y$  axis of block 2, we obtain

$$\begin{aligned} T - m_1 g \sin \theta &= m_1 a \\ F_N - m_1 g \cos \theta &= 0 \\ m_2 g - T &= m_2 a \end{aligned}$$

respectively. The first and third of these equations provide a simultaneous set for obtaining values of  $a$  and  $T$ . The second equation is not needed in this problem, since the normal force is neither asked for nor is it needed as part of some further computation (such as can occur in formulas for friction).

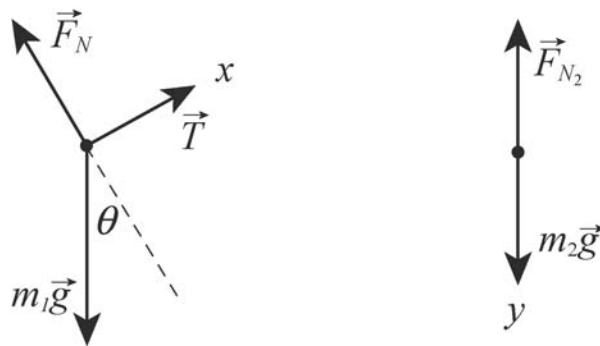

(a) We add the first and third equations above:

$$m_2 g - m_1 g \sin \theta = m_1 a + m_2 a.$$

Consequently, we find

$$a = \frac{(m_2 - m_1 \sin \theta) g}{m_1 + m_2} = \frac{[2.30 \text{ kg} - (3.70 \text{ kg}) \sin 30.0^\circ] (9.80 \text{ m/s}^2)}{3.70 \text{ kg} + 2.30 \text{ kg}} = 0.735 \text{ m/s}^2.$$

(b) The result for  $a$  is positive, indicating that the acceleration of block 1 is indeed up the incline and that the acceleration of block 2 is vertically down.

(c) The tension in the cord is

$$T = m_1 a + m_1 g \sin \theta = (3.70 \text{ kg}) (0.735 \text{ m/s}^2) + (3.70 \text{ kg}) (9.80 \text{ m/s}^2) \sin 30.0^\circ = 20.8 \text{ N}.$$



60. The motion of the man-and-chair is positive if upward.

(a) When the man is grasping the rope, pulling with a force equal to the tension  $T$  in the rope, the total upward force on the man-and-chair due its two contact points with the rope is  $2T$ . Thus, Newton's second law leads to

$$2T - mg = ma$$

so that when  $a = 0$ , the tension is  $T = 466 \text{ N}$ .

(b) When  $a = +1.30 \text{ m/s}^2$  the equation in part (a) predicts that the tension will be  $T = 527 \text{ N}$ .

(c) When the man is not holding the rope (instead, the co-worker attached to the ground is pulling on the rope with a force equal to the tension  $T$  in it), there is only one contact point between the rope and the man-and-chair, and Newton's second law now leads to

$$T - mg = ma$$

so that when  $a = 0$ , the tension is  $T = 931 \text{ N}$ .

(d) When  $a = +1.30 \text{ m/s}^2$ , the equation in (c) yields  $T = 1.05 \times 10^3 \text{ N}$ .

(e) The rope comes into contact (pulling down in each case) at the left edge and the right edge of the pulley, producing a total downward force of magnitude  $2T$  on the ceiling. Thus, in part (a) this gives  $2T = 931 \text{ N}$ .

(f) In part (b) the downward force on the ceiling has magnitude  $2T = 1.05 \times 10^3 \text{ N}$ .

(g) In part (c) the downward force on the ceiling has magnitude  $2T = 1.86 \times 10^3 \text{ N}$ .

(h) In part (d) the downward force on the ceiling has magnitude  $2T = 2.11 \times 10^3 \text{ N}$ .

61. The forces on the balloon are the force of gravity  $m\vec{g}$  (down) and the force of the air  $\vec{F}_a$  (up). We take the  $+y$  to be up, and use  $a$  to mean the *magnitude* of the acceleration (which is not its usual use in this chapter). When the mass is  $M$  (before the ballast is thrown out) the acceleration is downward and Newton's second law is

$$F_a - Mg = -Ma.$$

After the ballast is thrown out, the mass is  $M - m$  (where  $m$  is the mass of the ballast) and the acceleration is upward. Newton's second law leads to

$$F_a - (M - m)g = (M - m)a.$$

The previous equation gives  $F_a = M(g - a)$ , and this plugs into the new equation to give

$$M(g - a) - (M - m)g = (M - m)a \Rightarrow m = \frac{2Ma}{g + a}.$$

62. The horizontal component of the acceleration is determined by the net horizontal force.

(a) If the rate of change of the angle is

$$\frac{d\theta}{dt} = (2.00 \times 10^{-2})^\circ / \text{s} = (2.00 \times 10^{-2})^\circ / \text{s} \cdot \left( \frac{\pi \text{ rad}}{180^\circ} \right) = 3.49 \times 10^{-4} \text{ rad/s},$$

then, using  $F_x = F \cos \theta$ , we find the rate of change of acceleration to be

$$\begin{aligned} \frac{da_x}{dt} &= \frac{d}{dt} \left( \frac{F \cos \theta}{m} \right) = -\frac{F \sin \theta}{m} \frac{d\theta}{dt} = -\frac{(20.0 \text{ N}) \sin 25.0^\circ}{5.00 \text{ kg}} (3.49 \times 10^{-4} \text{ rad/s}) \\ &= -5.90 \times 10^{-4} \text{ m/s}^3. \end{aligned}$$

(b) If the rate of change of the angle is

$$\frac{d\theta}{dt} = -(2.00 \times 10^{-2})^\circ / \text{s} = -(2.00 \times 10^{-2})^\circ / \text{s} \cdot \left( \frac{\pi \text{ rad}}{180^\circ} \right) = -3.49 \times 10^{-4} \text{ rad/s},$$

then the rate of change of acceleration would be


$$\begin{aligned} \frac{da_x}{dt} &= \frac{d}{dt} \left( \frac{F \cos \theta}{m} \right) = -\frac{F \sin \theta}{m} \frac{d\theta}{dt} = -\frac{(20.0 \text{ N}) \sin 25.0^\circ}{5.00 \text{ kg}} (-3.49 \times 10^{-4} \text{ rad/s}) \\ &= +5.90 \times 10^{-4} \text{ m/s}^3. \end{aligned}$$

63. The free-body diagrams for  $m_1$  and  $m_2$  are shown in the figures below. The only forces on the blocks are the upward tension  $\vec{T}$  and the downward gravitational forces  $\vec{F}_1 = m_1 g$  and  $\vec{F}_2 = m_2 g$ . Applying Newton's second law, we obtain:

$$\begin{aligned} T - m_1 g &= m_1 a \\ m_2 g - T &= m_2 a \end{aligned}$$

which can be solved to give

$$a = \left( \frac{m_2 - m_1}{m_2 + m_1} \right) g$$

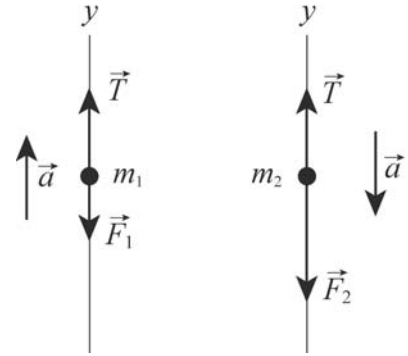

(a) At  $t = 0$ ,  $m_{10} = 1.30 \text{ kg}$ . With  $dm_1 / dt = -0.200 \text{ kg/s}$ , we find the rate of change of acceleration to be

$$\frac{da}{dt} = \frac{da}{dm_1} \frac{dm_1}{dt} = -\frac{2m_2 g}{(m_2 + m_{10})^2} \frac{dm_1}{dt} = -\frac{2(2.80 \text{ kg})(9.80 \text{ m/s}^2)}{(2.80 \text{ kg} + 1.30 \text{ kg})^2} (-0.200 \text{ kg/s}) = 0.653 \text{ m/s}^3.$$

(b) At  $t = 3.00 \text{ s}$ ,  $m_1 = m_{10} + (dm_1 / dt)t = 1.30 \text{ kg} + (-0.200 \text{ kg/s})(3.00 \text{ s}) = 0.700 \text{ kg}$ , and the rate of change of acceleration is

$$\frac{da}{dt} = \frac{da}{dm_1} \frac{dm_1}{dt} = -\frac{2m_2 g}{(m_2 + m_1)^2} \frac{dm_1}{dt} = -\frac{2(2.80 \text{ kg})(9.80 \text{ m/s}^2)}{(2.80 \text{ kg} + 0.700 \text{ kg})^2} (-0.200 \text{ kg/s}) = 0.896 \text{ m/s}^3.$$

(c) The acceleration reaches its maximum value when

$$0 = m_1 = m_{10} + (dm_1 / dt)t = 1.30 \text{ kg} + (-0.200 \text{ kg/s})t,$$

or  $t = 6.50 \text{ s}$ .

64. We first use Eq. 4-26 to solve for the launch speed of the shot:

$$y - y_0 = (\tan \theta)x - \frac{gx^2}{2(v' \cos \theta)^2}.$$

With  $\theta = 34.10^\circ$ ,  $y_0 = 2.11$  m and  $(x, y) = (15.90$  m, 0), we find the launch speed to be  $v' = 11.85$  m/s. During this phase, the acceleration is

$$a = \frac{v'^2 - v_0^2}{2L} = \frac{(11.85 \text{ m/s})^2 - (2.50 \text{ m/s})^2}{2(1.65 \text{ m})} = 40.63 \text{ m/s}^2.$$

Since the acceleration along the slanted path depends on only the force components along the path, not the components perpendicular to the path, the average force on the shot during the acceleration phase is

$$F = m(a + g \sin \theta) = (7.260 \text{ kg})[40.63 \text{ m/s}^2 + (9.80 \text{ m/s}^2) \sin 34.10^\circ] = 334.8 \text{ N}.$$


65. First we analyze the entire *system* with “clockwise” motion considered positive (that is, downward is positive for block *C*, rightward is positive for block *B*, and upward is positive for block *A*):  $m_C g - m_A g = Ma$  (where  $M = \text{mass of the system} = 24.0 \text{ kg}$ ). This yields an acceleration of

$$a = g(m_C - m_A)/M = 1.63 \text{ m/s}^2.$$

Next we analyze the forces just on block *C*:  $m_C g - T = m_C a$ . Thus the tension is

$$T = m_C g(2m_A + m_B)/M = 81.7 \text{ N}.$$

66. The  $+x$  direction for  $m_2=1.0$  kg is “downhill” and the  $+x$  direction for  $m_1=3.0$  kg is rightward; thus, they accelerate with the same sign.

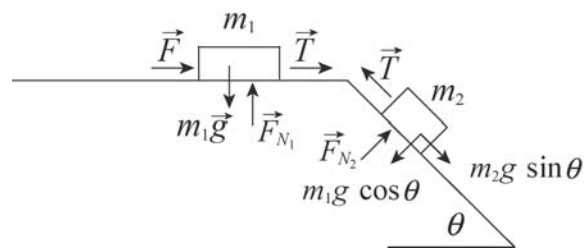

(a) We apply Newton’s second law to the  $x$  axis of each box:

$$\begin{aligned} m_2 g \sin \theta - T &= m_2 a \\ F + T &= m_1 a \end{aligned}$$

Adding the two equations allows us to solve for the acceleration:

$$a = \frac{m_2 g \sin \theta + F}{m_1 + m_2}$$

With  $F = 2.3$  N and  $\theta = 30^\circ$ , we have  $a = 1.8$  m/s<sup>2</sup>. We plug back and find  $T = 3.1$  N.

(b) We consider the “critical” case where the  $F$  has reached the *max* value, causing the tension to vanish. The first of the equations in part (a) shows that  $a = g \sin 30^\circ$  in this case; thus,  $a = 4.9$  m/s<sup>2</sup>. This implies (along with  $T = 0$  in the second equation in part (a)) that

$$F = (3.0 \text{ kg})(4.9 \text{ m/s}^2) = 14.7 \text{ N} \approx 15 \text{ N}$$

in the critical case.

67. (a) The acceleration (which equals  $F/m$  in this problem) is the derivative of the velocity. Thus, the velocity is the integral of  $F/m$ , so we find the “area” in the graph (15 units) and divide by the mass (3) to obtain  $v - v_0 = 15/3 = 5$ . Since  $v_0 = 3.0$  m/s, then  $v = 8.0$  m/s.

(b) Our positive answer in part (a) implies  $\vec{v}$  points in the  $+x$  direction.




68. The free-body diagram is shown on the right. Newton's second law for the mass  $m$  for the  $x$  direction leads to

$$T_1 - T_2 - mg \sin \theta = ma$$

which gives the difference in the tension in the pull cable:

$$\begin{aligned} T_1 - T_2 &= m(g \sin \theta + a) = (2800 \text{ kg})[(9.8 \text{ m/s}^2) \sin 35^\circ + 0.81 \text{ m/s}^2] \\ &= 1.8 \times 10^4 \text{ N.} \end{aligned}$$



69. (a) We quote our answers to many figures – probably more than are truly “significant.” Here  $(7682 \text{ L})(1.77 \text{ kg/L}) = 13597 \text{ kg}$ . The quotation marks around the 1.77 are due to the fact that this was believed (by the flight crew) to be a legitimate conversion factor (it is not).

(b) The amount they felt should be added was  $22300 \text{ kg} - 13597 \text{ kg} = 87083 \text{ kg}$ , which they believed to be equivalent to  $(87083 \text{ kg})/(1.77 \text{ kg/L}) = 4917 \text{ L}$ .

(c) Rounding to 4 figures as instructed, the conversion factor is  $1.77 \text{ lb/L} \rightarrow 0.8034 \text{ kg/L}$ , so the amount on board was  $(7682 \text{ L})(0.8034 \text{ kg/L}) = 6172 \text{ kg}$ .

(d) The implication is that what was needed was  $22300 \text{ kg} - 6172 \text{ kg} = 16128 \text{ kg}$ , so the request should have been for  $(16128 \text{ kg})/(0.8034 \text{ kg/L}) = 20075 \text{ L}$ .

(e) The percentage of the required fuel was

$$\frac{7682 \text{ L (on board)} + 4917 \text{ L (added)}}{(22300 \text{ kg required}) / (0.8034 \text{ kg/L})} = 45\%.$$

70. We are only concerned with horizontal forces in this problem (gravity plays no direct role). Without loss of generality, we take one of the forces along the  $+x$  direction and the other at  $80^\circ$  (measured counterclockwise from the  $x$  axis). This calculation is efficiently implemented on a vector capable calculator in polar mode, as follows (using magnitude-angle notation, with angles understood to be in degrees):

$$\vec{F}_{\text{net}} = (20 \angle 0) + (35 \angle 80) = (43 \angle 53) \Rightarrow |\vec{F}_{\text{net}}| = 43 \text{ N} .$$

Therefore, the mass is  $m = (43 \text{ N})/(20 \text{ m/s}^2) = 2.2 \text{ kg}$ .

71. The goal is to arrive at the least magnitude of  $\vec{F}_{\text{net}}$ , and as long as the magnitudes of  $\vec{F}_2$  and  $\vec{F}_3$  are (in total) less than or equal to  $|\vec{F}_1|$  then we should orient them opposite to the direction of  $\vec{F}_1$  (which is the  $+x$  direction).

(a) We orient both  $\vec{F}_2$  and  $\vec{F}_3$  in the  $-x$  direction. Then, the magnitude of the net force is  $50 - 30 - 20 = 0$ , resulting in zero acceleration for the tire.

(b) We again orient  $\vec{F}_2$  and  $\vec{F}_3$  in the negative  $x$  direction. We obtain an acceleration along the  $+x$  axis with magnitude

$$a = \frac{F_1 - F_2 - F_3}{m} = \frac{50 \text{ N} - 30 \text{ N} - 10 \text{ N}}{12 \text{ kg}} = 0.83 \text{ m/s}^2 .$$

(c) In this case, the forces  $\vec{F}_2$  and  $\vec{F}_3$  are collectively strong enough to have  $y$  components (one positive and one negative) which cancel each other and still have enough  $x$  contributions (in the  $-x$  direction) to cancel  $\vec{F}_1$ . Since  $|\vec{F}_2| = |\vec{F}_3|$ , we see that the angle above the  $-x$  axis to one of them should equal the angle below the  $-x$  axis to the other one (we denote this angle  $\theta$ ). We require

$$-50 \text{ N} = F_{2x} + F_{3x} = -(30 \text{ N}) \cos \theta - (30 \text{ N}) \cos \theta$$

which leads to

$$\theta = \cos^{-1} \left( \frac{50 \text{ N}}{60 \text{ N}} \right) = 34^\circ .$$

72. (a) A small segment of the rope has mass and is pulled down by the gravitational force of the Earth. Equilibrium is reached because neighboring portions of the rope pull up sufficiently on it. Since tension is a force *along* the rope, at least one of the neighboring portions must slope up away from the segment we are considering. Then, the tension has an upward component which means the rope sags.

(b) The only force acting with a horizontal component is the applied force  $\vec{F}$ . Treating the block and rope as a single object, we write Newton's second law for it:  $F = (M + m)a$ , where  $a$  is the acceleration and the positive direction is taken to be to the right. The acceleration is given by  $a = F/(M + m)$ .

(c) The force of the rope  $F_r$  is the only force with a horizontal component acting on the block. Then Newton's second law for the block gives

$$F_r = Ma = \frac{MF}{M + m}$$

where the expression found above for  $a$  has been used.

(d) Treating the block and half the rope as a single object, with mass  $M + \frac{1}{2}m$ , where the horizontal force on it is the tension  $T_m$  at the midpoint of the rope, we use Newton's second law:

$$T_m = \left( M + \frac{1}{2}m \right) a = \frac{(M + m/2)F}{(M + m)} = \frac{(2M + m)F}{2(M + m)}.$$

73. Although the full specification of  $\vec{F}_{\text{net}} = m\vec{a}$  in this situation involves both  $x$  and  $y$  axes, only the  $x$ -application is needed to find what this particular problem asks for. We note that  $a_y = 0$  so that there is no ambiguity denoting  $a_x$  simply as  $a$ . We choose  $+x$  to the right and  $+y$  up. We also note that the  $x$  component of the rope's tension (acting on the crate) is

$$F_x = F \cos \theta = (450 \text{ N}) \cos 38^\circ = 355 \text{ N},$$

and the resistive force (pointing in the  $-x$  direction) has magnitude  $f = 125 \text{ N}$ .

(a) Newton's second law leads to

$$F_x - f = ma \Rightarrow a = \frac{355 \text{ N} - 125 \text{ N}}{310 \text{ kg}} = 0.74 \text{ m/s}^2.$$

(b) In this case, we use Eq. 5-12 to find the mass:  $m = W/g = 31.6 \text{ kg}$ . Now, Newton's second law leads to

$$T_x - f = ma \Rightarrow a = \frac{355 \text{ N} - 125 \text{ N}}{31.6 \text{ kg}} = 7.3 \text{ m/s}^2.$$

74. Since the velocity of the particle does not change, it undergoes no acceleration and must therefore be subject to zero net force. Therefore,

$$\vec{F}_{\text{net}} = \vec{F}_1 + \vec{F}_2 + \vec{F}_3 = 0 .$$

Thus, the third force  $\vec{F}_3$  is given by

$$\vec{F}_3 = -\vec{F}_1 - \vec{F}_2 = -(2\hat{i} + 3\hat{j} - 2\hat{k})\text{N} - (-5\hat{i} + 8\hat{j} - 2\hat{k})\text{N} = (3\hat{i} - 11\hat{j} + 4\hat{k})\text{N}.$$

The specific value of the velocity is not used in the computation.

75. (a) Since the performer's weight is  $(52 \text{ kg})(9.8 \text{ m/s}^2) = 510 \text{ N}$ , the rope breaks.

(b) Setting  $T = 425 \text{ N}$  in Newton's second law (with  $+y$  upward) leads to

$$T - mg = ma \Rightarrow a = \frac{T}{m} - g$$

which yields  $|a| = 1.6 \text{ m/s}^2$ .



76. (a) For the 0.50 meter drop in “free-fall”, Eq. 2-16 yields a speed of 3.13 m/s. Using this as the “initial speed” for the final motion (over 0.02 meter) during which his motion slows at rate “ $a$ ”, we find the magnitude of his average acceleration from when his feet first touch the patio until the moment his body stops moving is  $a = 245 \text{ m/s}^2$ .

(b) We apply Newton’s second law:  $F_{\text{stop}} - mg = ma \Rightarrow F_{\text{stop}} = 20.4 \text{ kN}$ .

77. We begin by examining a slightly different problem: similar to this figure but without the string. The motivation is that if (without the string) block  $A$  is found to accelerate faster (or exactly as fast) as block  $B$  then (returning to the original problem) the tension in the string is trivially zero. In the absence of the string,

$$a_A = F_A/m_A = 3.0 \text{ m/s}^2$$

$$a_B = F_B/m_B = 4.0 \text{ m/s}^2$$

so the trivial case does not occur. We now (with the string) consider the net force on the *system*:  $Ma = F_A + F_B = 36 \text{ N}$ . Since  $M = 10 \text{ kg}$  (the total mass of the system) we obtain  $a = 3.6 \text{ m/s}^2$ . The two forces on block  $A$  are  $F_A$  and  $T$  (in the same direction), so we have

$$m_A a = F_A + T \Rightarrow T = 2.4 \text{ N}.$$

78. With SI units understood, the net force on the box is

$$\vec{F}_{\text{net}} = (3.0 + 14 \cos 30^\circ - 11) \hat{i} + (14 \sin 30^\circ + 5.0 - 17) \hat{j}$$

which yields  $\vec{F}_{\text{net}} = (4.1 \text{ N}) \hat{i} - (5.0 \text{ N}) \hat{j}$ .

(a) Newton's second law applied to the  $m = 4.0 \text{ kg}$  box leads to

$$\vec{a} = \frac{\vec{F}_{\text{net}}}{m} = (1.0 \text{ m/s}^2) \hat{i} - (1.3 \text{ m/s}^2) \hat{j}.$$

(b) The magnitude of  $\vec{a}$  is  $a = \sqrt{(1.0 \text{ m/s}^2)^2 + (-1.3 \text{ m/s}^2)^2} = 1.6 \text{ m/s}^2$ .

(c) Its angle is  $\tan^{-1} [(-1.3 \text{ m/s}^2)/(1.0 \text{ m/s}^2)] = -50^\circ$  (that is,  $50^\circ$  measured clockwise from the rightward axis).

79. The “certain force” denoted  $F$  is assumed to be the net force on the object when it gives  $m_1$  an acceleration  $a_1 = 12 \text{ m/s}^2$  and when it gives  $m_2$  an acceleration  $a_2 = 3.3 \text{ m/s}^2$ . Thus, we substitute  $m_1 = F/a_1$  and  $m_2 = F/a_2$  in appropriate places during the following manipulations.

(a) Now we seek the acceleration  $a$  of an object of mass  $m_2 - m_1$  when  $F$  is the net force on it. Thus,

$$a = \frac{F}{m_2 - m_1} = \frac{F}{(F/a_2) - (F/a_1)} = \frac{a_1 a_2}{a_1 - a_2}$$

which yields  $a = 4.6 \text{ m/s}^2$ .

(b) Similarly for an object of mass  $m_2 + m_1$ :

$$a = \frac{F}{m_2 + m_1} = \frac{F}{(F/a_2) + (F/a_1)} = \frac{a_1 a_2}{a_1 + a_2}$$

which yields  $a = 2.6 \text{ m/s}^2$ .

80. We use the notation  $g$  as the acceleration due to gravity near the surface of Callisto,  $m$  as the mass of the landing craft,  $a$  as the acceleration of the landing craft, and  $F$  as the rocket thrust. We take down to be the positive direction. Thus, Newton's second law takes the form  $mg - F = ma$ . If the thrust is  $F_1$  ( $= 3260$  N), then the acceleration is zero, so  $mg - F_1 = 0$ . If the thrust is  $F_2$  ( $= 2200$  N), then the acceleration is  $a_2$  ( $= 0.39$  m/s<sup>2</sup>), so  $mg - F_2 = ma_2$ .

(a) The first equation gives the weight of the landing craft:  $mg = F_1 = 3260$  N.

(b) The second equation gives the mass:

$$m = \frac{mg - F_2}{a_2} = \frac{3260 \text{ N} - 2200 \text{ N}}{0.39 \text{ m/s}^2} = 2.7 \times 10^3 \text{ kg} .$$

(c) The weight divided by the mass gives the acceleration due to gravity:

$$g = (3260 \text{ N}) / (2.7 \times 10^3 \text{ kg}) = 1.2 \text{ m/s}^2 .$$

81. From the reading when the elevator was at rest, we know the mass of the object is  $m = (65 \text{ N})/(9.8 \text{ m/s}^2) = 6.6 \text{ kg}$ . We choose  $+y$  upward and note there are two forces on the object:  $mg$  downward and  $T$  upward (in the cord that connects it to the balance;  $T$  is the reading on the scale by Newton's third law).

(a) "Upward at constant speed" means constant velocity, which means no acceleration. Thus, the situation is just as it was at rest:  $T = 65 \text{ N}$ .

(b) The term "deceleration" is used when the acceleration vector points in the direction opposite to the velocity vector. We're told the velocity is upward, so the acceleration vector points downward ( $a = -2.4 \text{ m/s}^2$ ). Newton's second law gives

$$T - mg = ma \Rightarrow T = (6.6 \text{ kg})(9.8 \text{ m/s}^2 - 2.4 \text{ m/s}^2) = 49 \text{ N}.$$

82. We take  $+x$  uphill for the  $m_2 = 1.0$  kg box and  $+x$  rightward for the  $m_1 = 3.0$  kg box (so the accelerations of the two boxes have the same magnitude and the same sign). The uphill force on  $m_2$  is  $F$  and the downhill forces on it are  $T$  and  $m_2g \sin \theta$ , where  $\theta = 37^\circ$ . The only horizontal force on  $m_1$  is the rightward-pointed tension. Applying Newton's second law to each box, we find

$$\begin{aligned} F - T - m_2g \sin \theta &= m_2a \\ T &= m_1a \end{aligned}$$

which can be added to obtain  $F - m_2g \sin \theta = (m_1 + m_2)a$ . This yields the acceleration

$$a = \frac{12 \text{ N} - (1.0 \text{ kg})(9.8 \text{ m/s}^2)\sin 37^\circ}{1.0 \text{ kg} + 3.0 \text{ kg}} = 1.53 \text{ m/s}^2.$$

Thus, the tension is  $T = m_1a = (3.0 \text{ kg})(1.53 \text{ m/s}^2) = 4.6 \text{ N}$ .

83. We apply Eq. 5-12.

(a) The mass is  $m = W/g = (22 \text{ N})/(9.8 \text{ m/s}^2) = 2.2 \text{ kg}$ . At a place where  $g = 4.9 \text{ m/s}^2$ , the mass is still 2.2 kg but the gravitational force is  $F_g = mg = (2.2 \text{ kg})(4.0 \text{ m/s}^2) = 11 \text{ N}$ .

(b) As noted,  $m = 2.2 \text{ kg}$ .

(c) At a place where  $g = 0$  the gravitational force is zero.

(d) The mass is still 2.2 kg.



84. We use  $W_p = mg_p$ , where  $W_p$  is the weight of an object of mass  $m$  on the surface of a certain planet  $p$ , and  $g_p$  is the acceleration of gravity on that planet.

(a) The weight of the space ranger on Earth is

$$W_e = mg_e = (75 \text{ kg}) (9.8 \text{ m/s}^2) = 7.4 \times 10^2 \text{ N}.$$

(b) The weight of the space ranger on Mars is

$$W_m = mg_m = (75 \text{ kg}) (3.7 \text{ m/s}^2) = 2.8 \times 10^2 \text{ N}.$$

(c) The weight of the space ranger in interplanetary space is zero, where the effects of gravity are negligible.

(d) The mass of the space ranger remains the same,  $m=75 \text{ kg}$ , at all the locations.

85. (a) When  $\vec{F}_{\text{net}} = 3F - mg = 0$ , we have

$$F = \frac{1}{3}mg = \frac{1}{3}(1400 \text{ kg})(9.8 \text{ m/s}^2) = 4.6 \times 10^3 \text{ N}$$


for the force exerted by each bolt on the engine.

(b) The force on each bolt now satisfies  $3F - mg = ma$ , which yields

$$F = \frac{1}{3}m(g + a) = \frac{1}{3}(1400 \text{ kg})(9.8 \text{ m/s}^2 + 2.6 \text{ m/s}^2) = 5.8 \times 10^3 \text{ N}.$$

86. We take the down to be the  $+y$  direction.

(a) The first diagram (shown below left) is the free-body diagram for the person and parachute, considered as a single object with a mass of  $80 \text{ kg} + 5.0 \text{ kg} = 85 \text{ kg}$ .

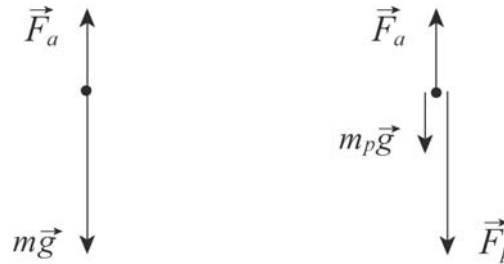

$\vec{F}_a$  is the force of the air on the parachute and  $m\vec{g}$  is the force of gravity. Application of Newton's second law produces  $mg - F_a = ma$ , where  $a$  is the acceleration. Solving for  $F_a$  we find

$$F_a = m(g - a) = (85 \text{ kg})(9.8 \text{ m/s}^2 - 2.5 \text{ m/s}^2) = 620 \text{ N}.$$

(b) The second diagram (above right) is the free-body diagram for the parachute alone.  $\vec{F}_a$  is the force of the air,  $m_p\vec{g}$  is the force of gravity, and  $\vec{F}_p$  is the force of the person. Now, Newton's second law leads to

$$m_pg + F_p - F_a = m_pa.$$

Solving for  $F_p$ , we obtain

$$F_p = m_p(a - g) + F_a = (5.0 \text{ kg})(2.5 \text{ m/s}^2 - 9.8 \text{ m/s}^2) + 620 \text{ N} = 580 \text{ N}.$$

87. (a) Intuition readily leads to the conclusion that the heavier block should be the hanging one, for largest acceleration. The force that “drives” the system into motion is the weight of the hanging block (gravity acting on the block on the table has no effect on the dynamics, so long as we ignore friction). Thus,  $m = 4.0$  kg.

The acceleration of the system and the tension in the cord can be readily obtained by solving

$$\begin{aligned}mg - T &= ma \\ T &= Ma.\end{aligned}$$

(b) The acceleration is given by

$$a = \left( \frac{m}{m + M} \right) g = 6.5 \text{ m/s}^2.$$

(c) The tension is

$$T = Ma = \left( \frac{Mm}{m + M} \right) g = 13 \text{ N}.$$

88. We assume the direction of motion is  $+x$  and assume the refrigerator starts from rest (so that the speed being discussed is the velocity  $\vec{v}$  which results from the process). The only force along the  $x$  axis is the  $x$  component of the applied force  $\vec{F}$ .

(a) Since  $v_0 = 0$ , the combination of Eq. 2-11 and Eq. 5-2 leads simply to

$$F_x = m \left( \frac{v}{t} \right) \Rightarrow v_i = \left( \frac{F \cos \theta_i}{m} \right) t$$

for  $i = 1$  or  $2$  (where we denote  $\theta_1 = 0$  and  $\theta_2 = \theta$  for the two cases). Hence, we see that the ratio  $v_2$  over  $v_1$  is equal to  $\cos \theta$ .

(b) Since  $v_0 = 0$ , the combination of Eq. 2-16 and Eq. 5-2 leads to

$$F_x = m \left( \frac{v^2}{2\Delta x} \right) \Rightarrow v_i = \sqrt{2 \left( \frac{F \cos \theta_i}{m} \right) \Delta x}$$

for  $i = 1$  or  $2$  (again,  $\theta_1 = 0$  and  $\theta_2 = \theta$  is used for the two cases). In this scenario, we see that the ratio  $v_2$  over  $v_1$  is equal to  $\sqrt{\cos \theta}$ .

89. The mass of the pilot is  $m = 735/9.8 = 75$  kg. Denoting the upward force exerted by the spaceship (his seat, presumably) on the pilot as  $\vec{F}$  and choosing upward the  $+y$  direction, then Newton's second law leads to

$$F - mg_{\text{moon}} = ma \Rightarrow F = (75 \text{ kg})(1.6 \text{ m/s}^2 + 1.0 \text{ m/s}^2) = 195 \text{ N}.$$

90. We denote the thrust as  $T$  and choose  $+y$  upward. Newton's second law leads to

$$T - Mg = Ma \Rightarrow a = \frac{2.6 \times 10^5 \text{ N}}{1.3 \times 10^4 \text{ kg}} - 9.8 \text{ m/s}^2 = 10 \text{ m/s}^2.$$

91. (a) The bottom cord is only supporting  $m_2 = 4.5 \text{ kg}$  against gravity, so its tension is

$$T_2 = m_2 g = (4.5 \text{ kg})(9.8 \text{ m/s}^2) = 44 \text{ N}.$$

(b) The top cord is supporting a total mass of  $m_1 + m_2 = (3.5 \text{ kg} + 4.5 \text{ kg}) = 8.0 \text{ kg}$  against gravity, so the tension there is

$$T_1 = (m_1 + m_2)g = (8.0 \text{ kg})(9.8 \text{ m/s}^2) = 78 \text{ N}.$$

(c) In the second picture, the lowest cord supports a mass of  $m_5 = 5.5 \text{ kg}$  against gravity and consequently has a tension of  $T_5 = (5.5 \text{ kg})(9.8 \text{ m/s}^2) = 54 \text{ N}$ .

(d) The top cord, we are told, has tension  $T_3 = 199 \text{ N}$  which supports a total of  $(199 \text{ N})/(9.80 \text{ m/s}^2) = 20.3 \text{ kg}$ ,  $10.3 \text{ kg}$  of which is already accounted for in the figure. Thus, the unknown mass in the middle must be  $m_4 = 20.3 \text{ kg} - 10.3 \text{ kg} = 10.0 \text{ kg}$ , and the tension in the cord above it must be enough to support

$$m_4 + m_5 = (10.0 \text{ kg} + 5.50 \text{ kg}) = 15.5 \text{ kg},$$

so  $T_4 = (15.5 \text{ kg})(9.80 \text{ m/s}^2) = 152 \text{ N}$ . Another way to analyze this is to examine the forces on  $m_3$ ; one of the downward forces on it is  $T_4$ .



92. (a) With SI units understood, the net force is

$$\vec{F}_{\text{net}} = \vec{F}_1 + \vec{F}_2 = (3.0 \text{ N} + (-2.0 \text{ N}))\hat{i} + (4.0 \text{ N} + (-6.0 \text{ N}))\hat{j}$$

which yields  $\vec{F}_{\text{net}} = (1.0 \text{ N})\hat{i} - (2.0 \text{ N})\hat{j}$ .

(b) The magnitude of  $\vec{F}_{\text{net}}$  is  $F_{\text{net}} = \sqrt{(1.0 \text{ N})^2 + (-2.0 \text{ N})^2} = 2.2 \text{ N}$ .

(c) The angle of  $\vec{F}_{\text{net}}$  is

$$\theta = \tan^{-1} \left( \frac{-2.0 \text{ N}}{1.0 \text{ N}} \right) = -63^\circ.$$

(d) The magnitude of  $\vec{a}$  is

$$a = F_{\text{net}} / m = (2.2 \text{ N}) / (1.0 \text{ kg}) = 2.2 \text{ m/s}^2.$$

(e) Since  $\vec{F}_{\text{net}}$  is equal to  $\vec{a}$  multiplied by mass  $m$ , which is a positive scalar that cannot affect the direction of the vector it multiplies,  $\vec{a}$  has the same angle as the net force, i.e.,  $\theta = -63^\circ$ . In magnitude-angle notation, we may write  $\vec{a} = (2.2 \text{ m/s}^2 \angle -63^\circ)$ .

93. According to Newton's second law, the magnitude of the force is given by  $F = ma$ , where  $a$  is the magnitude of the acceleration of the neutron. We use kinematics (Table 2-1) to find the acceleration that brings the neutron to rest in a distance  $d$ . Assuming the acceleration is constant, then  $v^2 = v_0^2 + 2ad$  produces the value of  $a$ :

$$a = \frac{(v^2 - v_0^2)}{2d} = \frac{-(1.4 \times 10^7 \text{ m/s})^2}{2(1.0 \times 10^{-14} \text{ m})} = -9.8 \times 10^{27} \text{ m/s}^2.$$

The magnitude of the force is consequently

$$F = ma = (1.67 \times 10^{-27} \text{ kg}) (9.8 \times 10^{27} \text{ m/s}^2) = 16 \text{ N}.$$

94. Making separate free-body diagrams for the helicopter and the truck, one finds there are two forces on the truck ( $\vec{T}$  upward, caused by the tension, which we'll think of as that of a single cable, and  $m\vec{g}$  downward, where  $m = 4500$  kg) and three forces on the helicopter ( $\vec{T}$  downward,  $\vec{F}_{\text{lift}}$  upward, and  $M\vec{g}$  downward, where  $M = 15000$  kg). With  $+y$  upward, then  $a = +1.4 \text{ m/s}^2$  for both the helicopter and the truck.

(a) Newton's law applied to the helicopter and truck separately gives

$$\begin{aligned} F_{\text{lift}} - T - Mg &= Ma \\ T - mg &= ma \end{aligned}$$


which we add together to obtain

$$F_{\text{lift}} - (M + m)g = (M + m)a.$$

From this equation, we find  $F_{\text{lift}} = 2.2 \times 10^5 \text{ N}$ .

(b) From the truck equation  $T - mg = ma$  we obtain  $T = 5.0 \times 10^4 \text{ N}$ .

95. The free-body diagram is shown on the right. Note that  $F_{m,r_y}$  and  $F_{m,r_x}$ , respectively, and thought of as the  $y$  and  $x$  components of the force  $\vec{F}_{m,r}$  exerted by the motorcycle on the rider.

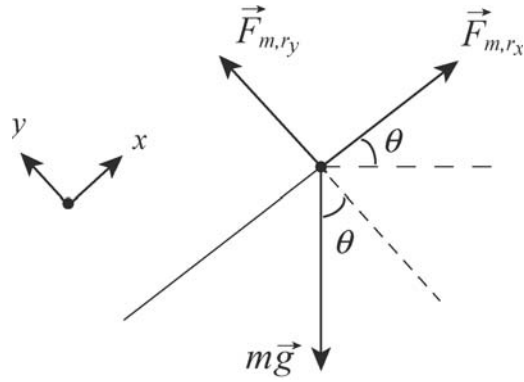

(a) Since the net force equals  $ma$ , then the magnitude of the net force on the rider is  $(60.0 \text{ kg})(3.0 \text{ m/s}^2) = 1.8 \times 10^2 \text{ N}$ .

(b) We apply Newton's second law to the  $x$  axis:

$$F_{m,r_x} - mg \sin \theta = ma$$

where  $m = 60.0 \text{ kg}$ ,  $a = 3.0 \text{ m/s}^2$ , and  $\theta = 10^\circ$ . Thus,  $F_{m,r_x} = 282 \text{ N}$ . Applying it to the  $y$  axis (where there is no acceleration), we have

$$F_{m,r_y} - mg \cos \theta = 0$$

which produces  $F_{m,r_y} = 579 \text{ N}$ . Using the Pythagorean theorem, we find

$$\sqrt{F_{m,r_x}^2 + F_{m,r_y}^2} = 644 \text{ N}.$$

Now, the magnitude of the force exerted on the rider by the motorcycle is the same magnitude of force exerted by the rider on the motorcycle, so the answer is  $6.4 \times 10^2 \text{ N}$ , to two significant figures.

96. We write the length unit light-month, the distance traveled by light in one month, as  $c \cdot \text{month}$  in this solution.

(a) The magnitude of the required acceleration is given by

$$a = \frac{\Delta v}{\Delta t} = \frac{(0.10)(3.0 \times 10^8 \text{ m/s})}{(3.0 \text{ days})(86400 \text{ s/day})} = 1.2 \times 10^2 \text{ m/s}^2.$$

(b) The acceleration in terms of  $g$  is

$$a = \left( \frac{a}{g} \right) g = \left( \frac{1.2 \times 10^2 \text{ m/s}^2}{9.8 \text{ m/s}^2} \right) g = 12g.$$

(c) The force needed is

$$F = ma = (1.20 \times 10^6 \text{ kg})(1.2 \times 10^2 \text{ m/s}^2) = 1.4 \times 10^8 \text{ N}.$$

(d) The spaceship will travel a distance  $d = 0.1 \text{ c} \cdot \text{month}$  during one month. The time it takes for the spaceship to travel at constant speed for 5.0 light-months is

$$t = \frac{d}{v} = \frac{5.0 \text{ c} \cdot \text{months}}{0.1c} = 50 \text{ months} \approx 4.2 \text{ years}.$$

97. The coordinate choices are made in the problem statement.

(a) We write the velocity of the armadillo as  $\vec{v} = v_x \hat{i} + v_y \hat{j}$ . Since there is no net force exerted on it in the  $x$  direction, the  $x$  component of the velocity of the armadillo is a constant:  $v_x = 5.0$  m/s. In the  $y$  direction at  $t = 3.0$  s, we have (using Eq. 2-11 with  $v_{0y} = 0$ )

$$v_y = v_{0y} + a_y t = v_{0y} + \left( \frac{F_y}{m} \right) t = \left( \frac{17 \text{ N}}{12 \text{ kg}} \right) (3.0 \text{ s}) = 4.3 \text{ m/s}.$$

Thus,  $\vec{v} = (5.0 \text{ m/s}) \hat{i} + (4.3 \text{ m/s}) \hat{j}$ .

(b) We write the position vector of the armadillo as  $\vec{r} = r_x \hat{i} + r_y \hat{j}$ . At  $t = 3.0$  s we have  $r_x = (5.0 \text{ m/s}) (3.0 \text{ s}) = 15$  m and (using Eq. 2-15 with  $v_{0y} = 0$ )

$$r_y = v_{0y} t + \frac{1}{2} a_y t^2 = \frac{1}{2} \left( \frac{F_y}{m} \right) t^2 = \frac{1}{2} \left( \frac{17 \text{ N}}{12 \text{ kg}} \right) (3.0 \text{ s})^2 = 6.4 \text{ m}.$$

The position vector at  $t = 3.0$  s is therefore

$$\vec{r} = (15 \text{ m}) \hat{i} + (6.4 \text{ m}) \hat{j}.$$

98. (a) From Newton's second law, the magnitude of the maximum force on the passenger from the floor is given by

$$F_{\max} - mg = ma \quad \text{where} \quad a = a_{\max} = 2.0 \text{ m/s}^2$$

we obtain  $F_N = 590 \text{ N}$  for  $m = 50 \text{ kg}$ .

(b) The direction is upward.

(c) Again, we use Newton's second law, the magnitude of the minimum force on the passenger from the floor is given by

$$F_{\min} - mg = ma \quad \text{where} \quad a = a_{\min} = -3.0 \text{ m/s}^2.$$


Now, we obtain  $F_N = 340 \text{ N}$ .

(d) The direction is upward.

(e) Returning to part (a), we use Newton's third law, and conclude that the force exerted by the passenger on the floor is  $|\vec{F}_{PF}| = 590 \text{ N}$ .

(f) The direction is downward.

99. The  $+x$  axis is “uphill” for  $m_1 = 3.0$  kg and “downhill” for  $m_2 = 2.0$  kg (so they both accelerate with the same sign). The  $x$  components of the two masses along the  $x$  axis are given by  $w_{1x} = m_1 g \sin \theta_1$  and  $w_{2x} = m_2 g \sin \theta_2$ , respectively.

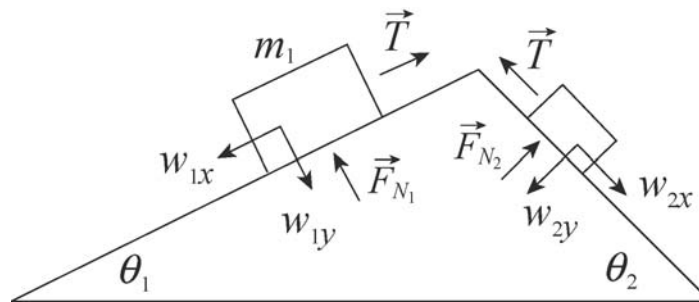

Applying Newton's second law, we obtain

$$\begin{aligned} T - m_1 g \sin \theta_1 &= m_1 a \\ m_2 g \sin \theta_2 - T &= m_2 a \end{aligned}$$

Adding the two equations allows us to solve for the acceleration:

$$a = \left( \frac{m_2 \sin \theta_2 - m_1 \sin \theta_1}{m_2 + m_1} \right) g$$

With  $\theta_1 = 30^\circ$  and  $\theta_2 = 60^\circ$ , we have  $a = 0.45 \text{ m/s}^2$ . This value is plugged back into either of the two equations to yield the tension  $T = 16 \text{ N}$ .



100. (a) In unit vector notation,

$$m \vec{a} = (-3.76 \text{ N}) \hat{i} + (1.37 \text{ N}) \hat{j}.$$

Thus, Newton's second law leads to

$$\vec{F}_2 = m \vec{a} - \vec{F}_1 = (-6.26 \text{ N}) \hat{i} - (3.23 \text{ N}) \hat{j}.$$


(b) The magnitude of  $\vec{F}_2$  is  $F_2 = \sqrt{(-6.26 \text{ N})^2 + (-3.23 \text{ N})^2} = 7.04 \text{ N}.$

(c) Since  $\vec{F}_2$  is in the third quadrant, the angle is

$$\theta = \tan^{-1} \left( \frac{-3.23 \text{ N}}{-6.26 \text{ N}} \right) = 207^\circ.$$

counterclockwise from positive direction of  $x$  axis (or  $153^\circ$  *clockwise* from  $+x$ ).

101. We first analyze the forces on  $m_1=1.0$  kg.

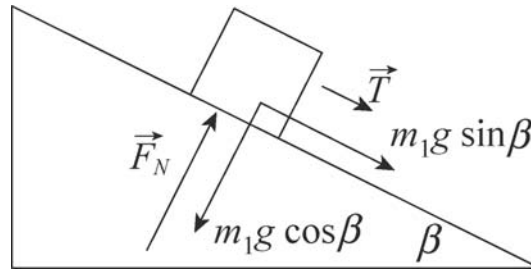

The  $+x$  direction is “downhill” (parallel to  $\vec{T}$ ).

With the acceleration ( $5.5 \text{ m/s}^2$ ) in the positive  $x$  direction for  $m_1$ , then Newton’s second law, applied to the  $x$  axis, becomes

$$T + m_1 g \sin \beta = m_1 (5.5 \text{ m/s}^2)$$

But for  $m_2=2.0$  kg, using the more familiar vertical  $y$  axis (with *up* as the positive direction), we have the acceleration in the negative direction:

$$F + T - m_2 g = m_2 (-5.5 \text{ m/s}^2)$$

where the tension comes in as an upward force (the cord can pull, not push).

(a) From the equation for  $m_2$ , with  $F = 6.0 \text{ N}$ , we find the tension  $T = 2.6 \text{ N}$ .

(b) From the equation for  $m$ , using the result from part (a), we obtain the angle  $\beta = 17^\circ$ .

102. (a) The word “hovering” is taken to imply that the upward (thrust) force is equal in magnitude to the downward (gravitational) force:  $mg = 4.9 \times 10^5 \text{ N}$ .

(b) Now the thrust must exceed the answer of part (a) by  $ma = 10 \times 10^5 \text{ N}$ , so the thrust must be  $1.5 \times 10^6 \text{ N}$ .

103. (a) Choosing the direction of motion as  $+x$ , Eq. 2-11 gives

$$a = \frac{88.5 \text{ km/h} - 0}{6.0 \text{ s}} = 15 \text{ km/h/s}.$$

Converting to SI, this is  $a = 4.1 \text{ m/s}^2$ .

(b) With mass  $m = 2000/9.8 = 204 \text{ kg}$ , Newton's second law gives  $\vec{F} = m\vec{a} = 836 \text{ N}$  in the  $+x$  direction.

104. (a) With  $v_0 = 0$ , Eq. 2-16 leads to

$$a = \frac{v^2}{2\Delta x} = \frac{(6.0 \times 10^6 \text{ m/s})^2}{2(0.015 \text{ m})} = 1.2 \times 10^{15} \text{ m/s}^2.$$

The force responsible for producing this acceleration is

$$F = ma = (9.11 \times 10^{-31} \text{ kg}) (1.2 \times 10^{15} \text{ m/s}^2) = 1.1 \times 10^{-15} \text{ N}.$$

(b) The weight is  $mg = 8.9 \times 10^{-30} \text{ N}$ , many orders of magnitude smaller than the result of part (a). As a result, gravity plays a negligible role in most atomic and subatomic processes.

1. We do not consider the possibility that the bureau might tip, and treat this as a purely horizontal motion problem (with the person's push  $\vec{F}$  in the  $+x$  direction). Applying Newton's second law to the  $x$  and  $y$  axes, we obtain

$$\begin{aligned} F - f_{s, \max} &= ma \\ F_N - mg &= 0 \end{aligned}$$

respectively. The second equation yields the normal force  $F_N = mg$ , whereupon the maximum static friction is found to be (from Eq. 6-1)  $f_{s, \max} = \mu_s mg$ . Thus, the first equation becomes

$$F - \mu_s mg = ma = 0$$

where we have set  $a = 0$  to be consistent with the fact that the static friction is still (just barely) able to prevent the bureau from moving.

(a) With  $\mu_s = 0.45$  and  $m = 45$  kg, the equation above leads to  $F = 198$  N. To bring the bureau into a state of motion, the person should push with any force greater than this value. Rounding to two significant figures, we can therefore say the minimum required push is  $F = 2.0 \times 10^2$  N.

(b) Replacing  $m = 45$  kg with  $m = 28$  kg, the reasoning above leads to roughly  $F = 1.2 \times 10^2$  N.

2. To maintain the stone's motion, a horizontal force (in the +x direction) is needed that cancels the retarding effect due to kinetic friction. Applying Newton's second to the  $x$  and  $y$  axes, we obtain

$$F - f_k = ma$$

$$F_N - mg = 0$$

respectively. The second equation yields the normal force  $F_N = mg$ , so that (using Eq. 6-2) the kinetic friction becomes  $f_k = \mu_k mg$ . Thus, the first equation becomes

$$F - \mu_k mg = ma = 0$$

where we have set  $a = 0$  to be consistent with the idea that the horizontal velocity of the stone should remain constant. With  $m = 20$  kg and  $\mu_k = 0.80$ , we find  $F = 1.6 \times 10^2$  N.

3. We denote  $\vec{F}$  as the horizontal force of the person exerted on the crate (in the  $+x$  direction),  $\vec{f}_k$  is the force of kinetic friction (in the  $-x$  direction),  $F_N$  is the vertical normal force exerted by the floor (in the  $+y$  direction), and  $m\vec{g}$  is the force of gravity. The magnitude of the force of friction is given by  $f_k = \mu_k F_N$  (Eq. 6-2). Applying Newton's second law to the  $x$  and  $y$  axes, we obtain

$$\begin{aligned} F - f_k &= ma \\ F_N - mg &= 0 \end{aligned}$$

respectively.

(a) The second equation yields the normal force  $F_N = mg$ , so that the friction is

$$f_k = \mu_k mg = (0.35)(55 \text{ kg})(9.8 \text{ m/s}^2) = 1.9 \times 10^2 \text{ N} .$$

(b) The first equation becomes

$$F - \mu_k mg = ma$$


which (with  $F = 220 \text{ N}$ ) we solve to find

$$a = \frac{F}{m} - \mu_k g = 0.56 \text{ m/s}^2 .$$



4. The free-body diagram for the player is shown next.  $\vec{F}_N$  is the normal force of the ground on the player,  $m\vec{g}$  is the force of gravity, and  $\vec{f}$  is the force of friction. The force of friction is related to the normal force by  $f = \mu_k F_N$ . We use Newton's second law applied to the vertical axis to find the normal force. The vertical component of the acceleration is zero, so we obtain  $F_N - mg = 0$ ; thus,  $F_N = mg$ . Consequently,

$$\mu_k = \frac{f}{F_N} = \frac{470 \text{ N}}{(79 \text{ kg})(9.8 \text{ m/s}^2)} = 0.61.$$

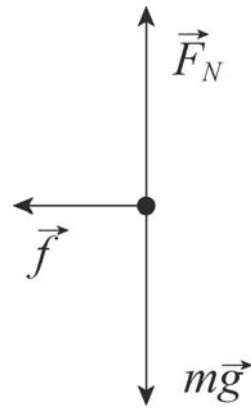


5. The greatest deceleration (of magnitude  $a$ ) is provided by the maximum friction force (Eq. 6-1, with  $F_N = mg$  in this case). Using Newton's second law, we find

$$a = f_{s,\max}/m = \mu_s g.$$

Eq. 2-16 then gives the shortest distance to stop:  $|\Delta x| = v^2/2a = 36$  m. In this calculation, it is important to first convert  $v$  to 13 m/s.

6. We first analyze the forces on the pig of mass  $m$ . The incline angle is  $\theta$ .

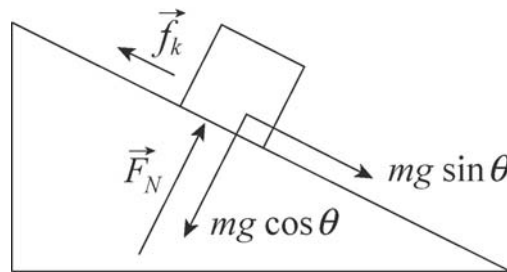

The  $+x$  direction is “downhill.”

Application of Newton’s second law to the  $x$ - and  $y$ -axes leads to

$$mg \sin \theta - f_k = ma$$

$$F_N - mg \cos \theta = 0.$$

Solving these along with Eq. 6-2 ( $f_k = \mu_k F_N$ ) produces the following result for the pig’s downhill acceleration:

$$a = g (\sin \theta - \mu_k \cos \theta).$$

To compute the time to slide from rest through a downhill distance  $\ell$ , we use Eq. 2-15:

$$\ell = v_0 t + \frac{1}{2} a t^2 \Rightarrow t = \sqrt{\frac{2\ell}{a}}.$$

We denote the frictionless ( $\mu_k = 0$ ) case with a prime and set up a ratio:

$$\frac{t}{t'} = \frac{\sqrt{2\ell/a}}{\sqrt{2\ell/a'}} = \sqrt{\frac{a'}{a}}$$

which leads us to conclude that if  $t/t' = 2$  then  $a' = 4a$ . Putting in what we found out above about the accelerations, we have

$$g \sin \theta = 4g (\sin \theta - \mu_k \cos \theta).$$

Using  $\theta = 35^\circ$ , we obtain  $\mu_k = 0.53$ .

7. We choose  $+x$  horizontally rightwards and  $+y$  upwards and observe that the 15 N force has components  $F_x = F \cos \theta$  and  $F_y = -F \sin \theta$ .

(a) We apply Newton's second law to the  $y$  axis:

$$F_N - F \sin \theta - mg = 0 \Rightarrow F_N = (15 \text{ N}) \sin 40^\circ + (3.5 \text{ kg})(9.8 \text{ m/s}^2) = 44 \text{ N}.$$

With  $\mu_k = 0.25$ , Eq. 6-2 leads to  $f_k = 11 \text{ N}$ .

(b) We apply Newton's second law to the  $x$  axis:

$$F \cos \theta - f_k = ma \Rightarrow a = \frac{(15 \text{ N}) \cos 40^\circ - 11 \text{ N}}{3.5 \text{ kg}} = 0.14 \text{ m/s}^2.$$

Since the result is positive-valued, then the block is accelerating in the  $+x$  (rightward) direction.

8. In addition to the forces already shown in Fig. 6-21, a free-body diagram would include an upward normal force  $\vec{F}_N$  exerted by the floor on the block, a downward  $m\vec{g}$  representing the gravitational pull exerted by Earth, and an assumed-leftward  $\vec{f}$  for the kinetic or static friction. We choose  $+x$  rightwards and  $+y$  upwards. We apply Newton's second law to these axes:

$$\begin{aligned} F - f &= ma \\ P + F_N - mg &= 0 \end{aligned}$$

where  $F = 6.0$  N and  $m = 2.5$  kg is the mass of the block.

(a) In this case,  $P = 8.0$  N leads to

$$F_N = (2.5 \text{ kg})(9.8 \text{ m/s}^2) - 8.0 \text{ N} = 16.5 \text{ N}.$$

Using Eq. 6-1, this implies  $f_{s,\max} = \mu_s F_N = 6.6$  N, which is larger than the 6.0 N rightward force – so the block (which was initially at rest) does not move. Putting  $a = 0$  into the first of our equations above yields a static friction force of  $f = P = 6.0$  N.

(b) In this case,  $P = 10$  N, the normal force is  $F_N = (2.5 \text{ kg})(9.8 \text{ m/s}^2) - 10 \text{ N} = 14.5$  N. Using Eq. 6-1, this implies  $f_{s,\max} = \mu_s F_N = 5.8$  N, which is less than the 6.0 N rightward force – so the block does move. Hence, we are dealing not with static but with kinetic friction, which Eq. 6-2 reveals to be  $f_k = \mu_k F_N = 3.6$  N.

(c) In this last case,  $P = 12$  N leads to  $F_N = 12.5$  N and thus to  $f_{s,\max} = \mu_s F_N = 5.0$  N, which (as expected) is less than the 6.0 N rightward force – so the block moves. The kinetic friction force, then, is  $f_k = \mu_k F_N = 3.1$  N.

9. Applying Newton's second law to the horizontal motion, we have  $F - \mu_k mg = ma$ , where we have used Eq. 6-2, assuming that  $F_N = mg$  (which is equivalent to assuming that the vertical force from the broom is negligible). Eq. 2-16 relates the distance traveled and the final speed to the acceleration:  $v^2 = 2a\Delta x$ . This gives  $a = 1.4 \text{ m/s}^2$ . Returning to the force equation, we find (with  $F = 25 \text{ N}$  and  $m = 3.5 \text{ kg}$ ) that  $\mu_k = 0.58$ .

10. There is no acceleration, so the (upward) static friction forces (there are four of them, one for each thumb and one for each set of opposing fingers) equals the magnitude of the (downward) pull of gravity. Using Eq. 6-1, we have

$$4\mu_s F_N = mg = (79 \text{ kg})(9.8 \text{ m/s}^2)$$

which, with  $\mu_s = 0.70$ , yields  $F_N = 2.8 \times 10^2 \text{ N}$ .

11. We denote the magnitude of 110 N force exerted by the worker on the crate as  $F$ . The magnitude of the static frictional force can vary between zero and  $f_{s,\max} = \mu_s F_N$ .

(a) In this case, application of Newton's second law in the vertical direction yields  $F_N = mg$ . Thus,

$$f_{s,\max} = \mu_s F_N = \mu_s mg = (0.37)(35\text{ kg})(9.8\text{ m/s}^2) = 1.3 \times 10^2 \text{ N}$$

which is greater than  $F$ .

(b) The block, which is initially at rest, stays at rest since  $F < f_{s,\max}$ . Thus, it does not move.

(c) By applying Newton's second law to the horizontal direction, that the magnitude of the frictional force exerted on the crate is  $f_s = 1.1 \times 10^2 \text{ N}$ .

(d) Denoting the upward force exerted by the second worker as  $F_2$ , then application of Newton's second law in the vertical direction yields  $F_N = mg - F_2$ , which leads to

$$f_{s,\max} = \mu_s F_N = \mu_s (mg - F_2).$$

In order to move the crate,  $F$  must satisfy the condition  $F > f_{s,\max} = \mu_s (mg - F_2)$

or

$$110 \text{ N} > (0.37) \left[ (35 \text{ kg})(9.8 \text{ m/s}^2) - F_2 \right].$$

The minimum value of  $F_2$  that satisfies this inequality is a value slightly bigger than 45.7 N, so we express our answer as  $F_{2,\min} = 46 \text{ N}$ .

(e) In this final case, moving the crate requires a greater horizontal push from the worker than static friction (as computed in part (a)) can resist. Thus, Newton's law in the horizontal direction leads to

$$F + F_2 > f_{s,\max} \quad \Rightarrow \quad 110 \text{ N} + F_2 > 126.9 \text{ N}$$

which leads (after appropriate rounding) to  $F_{2,\min} = 17 \text{ N}$ .



12. (a) Using the result obtained in Sample Problem 6-2, the maximum angle for which static friction applies is

$$\theta_{\max} = \tan^{-1} \mu_s = \tan^{-1} 0.63 \approx 32^\circ.$$

This is greater than the dip angle in the problem, so the block does not slide.


(b) We analyze forces in a manner similar to that shown in Sample Problem 6-3, but with the addition of a downhill force  $F$ .

$$\begin{aligned} F + mg \sin \theta - f_{s, \max} &= ma = 0 \\ F_N - mg \cos \theta &= 0. \end{aligned}$$

Along with Eq. 6-1 ( $f_{s, \max} = \mu_s F_N$ ) we have enough information to solve for  $F$ . With  $\theta = 24^\circ$  and  $m = 1.8 \times 10^7$  kg, we find

$$F = mg(\mu_s \cos \theta - \sin \theta) = 3.0 \times 10^7 \text{ N}.$$

13. (a) The free-body diagram for the crate is shown on the right.  $\vec{T}$  is the tension force of the rope on the crate,  $\vec{F}_N$  is the normal force of the floor on the crate,  $m\vec{g}$  is the force of gravity, and  $\vec{f}$  is the force of friction. We take the  $+x$  direction to be horizontal to the right and the  $+y$  direction to be up. We assume the crate is motionless. The equations for the  $x$  and the  $y$  components of the force according to Newton's second law are:

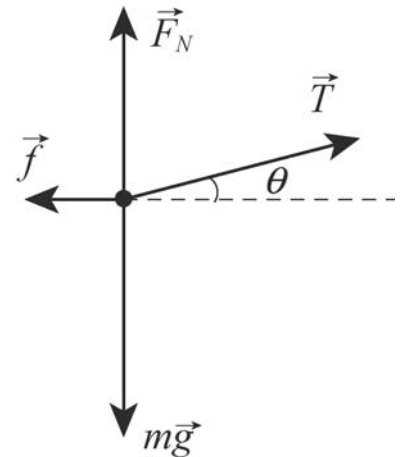

$$\begin{aligned} T \cos \theta - f &= 0 \\ T \sin \theta + F_N - mg &= 0 \end{aligned}$$

where  $\theta = 15^\circ$  is the angle between the rope and the horizontal. The first equation gives  $f = T \cos \theta$  and the second gives  $F_N = mg - T \sin \theta$ . If the crate is to remain at rest,  $f$  must be less than  $\mu_s F_N$ , or  $T \cos \theta < \mu_s (mg - T \sin \theta)$ . When the tension force is sufficient to just start the crate moving, we must have

$$T \cos \theta = \mu_s (mg - T \sin \theta).$$

We solve for the tension:

$$T = \frac{\mu_s mg}{\cos \theta + \mu_s \sin \theta} = \frac{(0.50)(68 \text{ kg})(9.8 \text{ m/s}^2)}{\cos 15^\circ + 0.50 \sin 15^\circ} = 304 \text{ N} \approx 3.0 \times 10^2 \text{ N}.$$

(b) The second law equations for the moving crate are

$$\begin{aligned} T \cos \theta - f &= ma \\ F_N + T \sin \theta - mg &= 0. \end{aligned}$$

Now  $f = \mu_k F_N$ , and the second equation gives  $F_N = mg - T \sin \theta$ , which yields  $f = \mu_k (mg - T \sin \theta)$ . This expression is substituted for  $f$  in the first equation to obtain

$$T \cos \theta - \mu_k (mg - T \sin \theta) = ma,$$


so the acceleration is

$$a = \frac{T(\cos \theta + \mu_k \sin \theta)}{m} - \mu_k g.$$

Numerically, it is given by

$$a = \frac{(304 \text{ N})(\cos 15^\circ + 0.35 \sin 15^\circ)}{68 \text{ kg}} - (0.35)(9.8 \text{ m/s}^2) = 1.3 \text{ m/s}^2.$$

14. (a) The free-body diagram for the block is shown on the right, with  $\vec{F}$  being the force applied to the block,  $\vec{F}_N$  the normal force of the floor on the block,  $m\vec{g}$  the force of gravity, and  $\vec{f}$  the force of friction. We take the  $+x$  direction to be horizontal to the right and the  $+y$  direction to be up. The equations for the  $x$  and the  $y$  components of the force according to Newton's second law are:

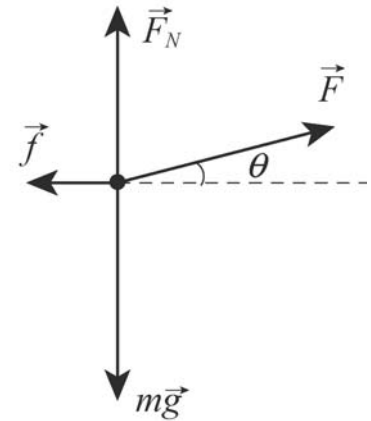

$$\begin{aligned} F_x &= F \cos \theta - f = ma \\ F_y &= F \sin \theta + F_N - mg = 0 \end{aligned}$$

Now  $f = \mu_k F_N$ , and the second equation gives  $F_N = mg - F \sin \theta$ , which yields  $f = \mu_k (mg - F \sin \theta)$ . This expression is substituted for  $f$  in the first equation to obtain

$$F \cos \theta - \mu_k (mg - F \sin \theta) = ma,$$

so the acceleration is

$$a = \frac{F}{m} (\cos \theta + \mu_k \sin \theta) - \mu_k g.$$

(a) If  $\mu_s = 0.600$  and  $\mu_k = 0.500$ , then the magnitude of  $\vec{f}$  has a maximum value of

$$f_{s,\max} = \mu_s F_N = (0.600)(mg - 0.500mg \sin 20^\circ) = 0.497mg.$$

On the other hand,  $F \cos \theta = 0.500mg \cos 20^\circ = 0.470mg$ . Therefore,  $F \cos \theta < f_{s,\max}$  and the block remains stationary with  $a = 0$ .

(b) If  $\mu_s = 0.400$  and  $\mu_k = 0.300$ , then the magnitude of  $\vec{f}$  has a maximum value of

$$f_{s,\max} = \mu_s F_N = (0.400)(mg - 0.500mg \sin 20^\circ) = 0.332mg.$$

In this case,  $F \cos \theta = 0.500mg \cos 20^\circ = 0.470mg > f_{s,\max}$ . Therefore, the acceleration of the block is

$$\begin{aligned} a &= \frac{F}{m} (\cos \theta + \mu_k \sin \theta) - \mu_k g \\ &= (0.500)(9.80 \text{ m/s}^2) [\cos 20^\circ + (0.300) \sin 20^\circ] - (0.300)(9.80 \text{ m/s}^2) \\ &= 2.17 \text{ m/s}^2. \end{aligned}$$

15. An excellent discussion and equation development related to this problem is given in Sample Problem 6-2. We merely quote (and apply) their main result:

$$\theta = \tan^{-1} \mu_s = \tan^{-1} 0.04 \approx 2^\circ .$$

16. (a) We apply Newton's second law to the "downhill" direction:

$$mg \sin \theta - f = ma,$$

where, using Eq. 6-11,

$$f = f_k = \mu_k F_N = \mu_k mg \cos \theta.$$

Thus, with  $\mu_k = 0.600$ , we have


$$a = g \sin \theta - \mu_k g \cos \theta = -3.72 \text{ m/s}^2$$

which means, since we have chosen the positive direction in the direction of motion (down the slope) then the acceleration vector points "uphill"; it is decelerating. With  $v_0 = 18.0 \text{ m/s}$  and  $\Delta x = d = 24.0 \text{ m}$ , Eq. 2-16 leads to

$$v = \sqrt{v_0^2 + 2ad} = 12.1 \text{ m/s}.$$

(b) In this case, we find  $a = +1.1 \text{ m/s}^2$ , and the speed (when impact occurs) is  $19.4 \text{ m/s}$ .

17. (a) The free-body diagram for the block is shown below.  $\vec{F}$  is the applied force,  $\vec{F}_N$  is the normal force of the wall on the block,  $\vec{f}$  is the force of friction, and  $m\vec{g}$  is the force of gravity. To determine if the block falls, we find the magnitude  $f$  of the force of friction required to hold it without accelerating and also find the normal force of the wall on the block. We compare  $f$  and  $\mu_s F_N$ . If  $f < \mu_s F_N$ , the block does not slide on the wall but if  $f > \mu_s F_N$ , the block does slide. The horizontal component of Newton's second law is  $F - F_N = 0$ , so  $F_N = F = 12 \text{ N}$  and

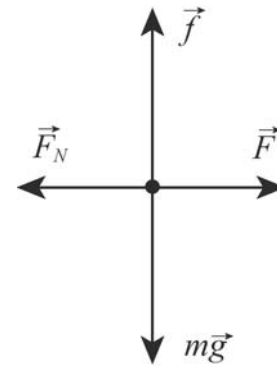

$$\mu_s F_N = (0.60)(12 \text{ N}) = 7.2 \text{ N}.$$

The vertical component is  $f - mg = 0$ , so  $f = mg = 5.0 \text{ N}$ . Since  $f < \mu_s F_N$  the block does not slide.

(b) Since the block does not move  $f = 5.0 \text{ N}$  and  $F_N = 12 \text{ N}$ . The force of the wall on the block is

$$\vec{F}_w = -F_N \hat{i} + f \hat{j} = -(12 \text{ N}) \hat{i} + (5.0 \text{ N}) \hat{j}$$

where the axes are as shown on Fig. 6-26 of the text.

18. We find the acceleration from the slope of the graph (recall Eq. 2-11):  $a = 4.5 \text{ m/s}^2$ . Thus, Newton's second law leads to

$$F - \mu_k mg = ma,$$

where  $F = 40.0 \text{ N}$  is the constant horizontal force applied. With  $m = 4.1 \text{ kg}$ , we arrive at  $\mu_k = 0.54$ .

19. Fig. 6-4 in the textbook shows a similar situation (using  $\phi$  for the unknown angle) along with a free-body diagram. We use the same coordinate system as in that figure.

(a) Thus, Newton's second law leads to

$$\begin{aligned} x: \quad T \cos \phi - f &= ma \\ y: \quad T \sin \phi + F_N - mg &= 0 \end{aligned}$$

Setting  $a = 0$  and  $f = f_{s,\max} = \mu_s F_N$ , we solve for the mass of the box-and-sand (as a function of angle):

$$m = \frac{T}{g} \left( \sin \phi + \frac{\cos \phi}{\mu_s} \right)$$

which we will solve with calculus techniques (to find the angle  $\phi_m$  corresponding to the maximum mass that can be pulled).

$$\frac{dm}{d\phi} = \frac{T}{g} \left( \cos \phi - \frac{\sin \phi}{\mu_s} \right) = 0$$

This leads to  $\tan \phi_m = \mu_s$  which (for  $\mu_s = 0.35$ ) yields  $\phi_m = 19^\circ$ .

(b) Plugging our value for  $\phi_m$  into the equation we found for the mass of the box-and-sand yields  $m = 340$  kg. This corresponds to a weight of  $mg = 3.3 \times 10^3$  N.



20. (a) In this situation, we take  $\vec{f}_s$  to point uphill and to be equal to its maximum value, in which case  $f_{s, \max} = \mu_s F_N$  applies, where  $\mu_s = 0.25$ . Applying Newton's second law to the block of mass  $m = W/g = 8.2$  kg, in the  $x$  and  $y$  directions, produces

$$\begin{aligned} F_{\min 1} - mg \sin \theta + f_{s, \max} &= ma = 0 \\ F_N - mg \cos \theta &= 0 \end{aligned}$$

which (with  $\theta = 20^\circ$ ) leads to

$$F_{\min 1} - mg (\sin \theta + \mu_s \cos \theta) = 8.6 \text{ N.}$$

(b) Now we take  $\vec{f}_s$  to point downhill and to be equal to its maximum value, in which case  $f_{s, \max} = \mu_s F_N$  applies, where  $\mu_s = 0.25$ . Applying Newton's second law to the block of mass  $m = W/g = 8.2$  kg, in the  $x$  and  $y$  directions, produces

$$\begin{aligned} F_{\min 2} = mg \sin \theta - f_{s, \max} &= ma = 0 \\ F_N - mg \cos \theta &= 0 \end{aligned}$$

which (with  $\theta = 20^\circ$ ) leads to

$$F_{\min 2} = mg (\sin \theta + \mu_s \cos \theta) = 46 \text{ N.}$$

A value slightly larger than the “exact” result of this calculation is required to make it accelerate uphill, but since we quote our results here to two significant figures, 46 N is a “good enough” answer.

(c) Finally, we are dealing with kinetic friction (pointing downhill), so that

$$\begin{aligned} 0 &= F - mg \sin \theta - f_k = ma \\ 0 &= F_N - mg \cos \theta \end{aligned}$$

along with  $f_k = \mu_k F_N$  (where  $\mu_k = 0.15$ ) brings us to

$$F = mg (\sin \theta + \mu_k \cos \theta) = 39 \text{ N.}$$

21. If the block is sliding then we compute the kinetic friction from Eq. 6-2; if it is not sliding, then we determine the extent of static friction from applying Newton's law, with zero acceleration, to the  $x$  axis (which is parallel to the incline surface). The question of whether or not it is sliding is therefore crucial, and depends on the maximum static friction force, as calculated from Eq. 6-1. The forces are resolved in the incline plane coordinate system in Figure 6-5 in the textbook. The acceleration, if there is any, is along the  $x$  axis, and we are taking uphill as  $+x$ . The net force along the  $y$  axis, then, is certainly zero, which provides the following relationship:

$$\sum \vec{F}_y = 0 \Rightarrow F_N = W \cos \theta$$

where  $W = mg = 45 \text{ N}$  is the weight of the block, and  $\theta = 15^\circ$  is the incline angle. Thus,  $F_N = 43.5 \text{ N}$ , which implies that the maximum static friction force should be

$$f_{s,\max} = (0.50)(43.5 \text{ N}) = 21.7 \text{ N}.$$

(a) For  $\vec{P} = (-5.0 \text{ N})\hat{i}$ , Newton's second law, applied to the  $x$  axis becomes

$$f - |P| - mg \sin \theta = ma.$$

Here we are assuming  $\vec{f}$  is pointing uphill, as shown in Figure 6-5, and if it turns out that it points downhill (which is a possibility), then the result for  $f_s$  will be negative. If  $f = f_s$  then  $a = 0$ , we obtain

$$f_s = |P| + mg \sin \theta = 5.0 \text{ N} + (43.5 \text{ N})\sin 15^\circ = 17 \text{ N},$$

or  $\vec{f}_s = (17 \text{ N})\hat{i}$ . This is clearly allowed since  $f_s$  is less than  $f_{s,\max}$ .

(b) For  $\vec{P} = (-8.0 \text{ N})\hat{i}$ , we obtain (from the same equation)  $\vec{f}_s = (20 \text{ N})\hat{i}$ , which is still allowed since it is less than  $f_{s,\max}$ .

(c) But for  $\vec{P} = (-15 \text{ N})\hat{i}$ , we obtain (from the same equation)  $f_s = 27 \text{ N}$ , which is not allowed since it is larger than  $f_{s,\max}$ . Thus, we conclude that it is the kinetic friction instead of the static friction that is relevant in this case. The result is

$$\vec{f}_k = \mu_k F_N \hat{i} = (0.34)(43.5 \text{ N})\hat{i} = (15 \text{ N})\hat{i}.$$

22. Treating the two boxes as a single system of total mass  $m_C + m_W = 1.0 + 3.0 = 4.0$  kg, subject to a total (leftward) friction of magnitude  $2.0 \text{ N} + 4.0 \text{ N} = 6.0 \text{ N}$ , we apply Newton's second law (with  $+x$  rightward):


$$F - f_{\text{total}} = m_{\text{total}} a \Rightarrow 12.0 \text{ N} - 6.0 \text{ N} = (4.0 \text{ kg})a$$

which yields the acceleration  $a = 1.5 \text{ m/s}^2$ . We have treated  $F$  as if it were known to the nearest tenth of a Newton so that our acceleration is “good” to two significant figures. Turning our attention to the larger box (the Wheaties box of mass  $m_W = 3.0$  kg) we apply Newton's second law to find the contact force  $F'$  exerted by the Cheerios box on it.

$$F' - f_W = m_W a \Rightarrow F' - 4.0 \text{ N} = (3.0 \text{ kg})(1.5 \text{ m/s}^2).$$

From the above equation, we find the contact force to be  $F' = 8.5 \text{ N}$ .

23. The free-body diagrams for block  $B$  and for the knot just above block  $A$  are shown next.  $\vec{T}_1$  is the tension force of the rope pulling on block  $B$  or pulling on the knot (as the case may be),  $\vec{T}_2$  is the tension force exerted by the second rope (at angle  $\theta = 30^\circ$ ) on the knot,  $\vec{f}$  is the force of static friction exerted by the horizontal surface on block  $B$ ,  $\vec{F}_N$  is normal force exerted by the surface on block  $B$ ,  $W_A$  is the weight of block  $A$  ( $W_A$  is the magnitude of  $m_A \vec{g}$ ), and  $W_B$  is the weight of block  $B$  ( $W_B = 711 \text{ N}$  is the magnitude of  $m_B \vec{g}$ ).

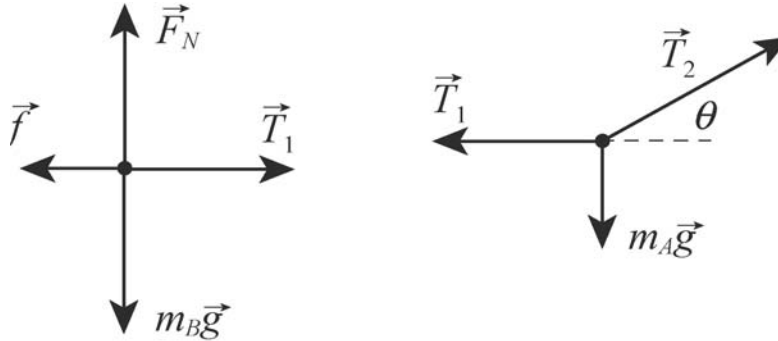

For each object we take  $+x$  horizontally rightward and  $+y$  upward. Applying Newton's second law in the  $x$  and  $y$  directions for block  $B$  and then doing the same for the knot results in four equations:

$$\begin{aligned} T_1 - f_{s,\max} &= 0 \\ F_N - W_B &= 0 \\ T_2 \cos \theta - T_1 &= 0 \\ T_2 \sin \theta - W_A &= 0 \end{aligned}$$


where we assume the static friction to be at its maximum value (permitting us to use Eq. 6-1). Solving these equations with  $\mu_s = 0.25$ , we obtain  $W_A = 103 \text{ N} \approx 1.0 \times 10^2 \text{ N}$ .

24. The free-body diagram for the block is shown below, with  $\vec{F}$  being the force applied to the block,  $\vec{F}_N$  the normal force of the floor on the block,  $m\vec{g}$  the force of gravity, and  $\vec{f}$  the force of friction. We take the  $+x$  direction to be horizontal to the right and the  $+y$  direction to be up. The equations for the  $x$  and the  $y$  components of the force according to Newton's second law are:

$$\begin{aligned} F_x &= F \cos \theta - f = ma \\ F_y &= F_N - F \sin \theta - mg = 0 \end{aligned}$$

Now  $f = \mu_k F_N$ , and the second equation gives  $F_N = mg + F \sin \theta$ , which yields

$$f = \mu_k (mg + F \sin \theta).$$

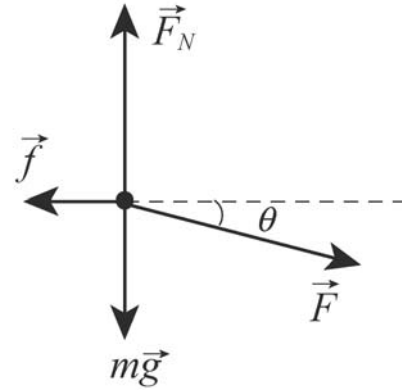

This expression is substituted for  $f$  in the first equation to obtain

$$F \cos \theta - \mu_k (mg + F \sin \theta) = ma,$$

so the acceleration is

$$a = \frac{F}{m} (\cos \theta - \mu_k \sin \theta) - \mu_k g.$$

From Fig. 6-32, we see that  $a = 3.0 \text{ m/s}^2$  when  $\mu_k = 0$ . This implies

$$3.0 \text{ m/s}^2 = \frac{F}{m} \cos \theta.$$

We also find  $a = 0$  when  $\mu_k = 0.20$ :

$$\begin{aligned} 0 &= \frac{F}{m} (\cos \theta - (0.20) \sin \theta) - (0.20)(9.8 \text{ m/s}^2) = 3.00 \text{ m/s}^2 - 0.20 \frac{F}{m} \sin \theta - 1.96 \text{ m/s}^2 \\ &= 1.04 \text{ m/s}^2 - 0.20 \frac{F}{m} \sin \theta \end{aligned}$$

which yields  $5.2 \text{ m/s}^2 = \frac{F}{m} \sin \theta$ . Combining the two results, we get

$$\tan \theta = \left( \frac{5.2 \text{ m/s}^2}{3.0 \text{ m/s}^2} \right) = 1.73 \Rightarrow \theta = 60^\circ.$$

25. Let the tensions on the strings connecting  $m_2$  and  $m_3$  be  $T_{23}$ , and that connecting  $m_2$  and  $m_1$  be  $T_{12}$ , respectively. Applying Newton's second law (and Eq. 6-2, with  $F_N = m_2g$  in this case) to the *system* we have


$$\begin{aligned} m_3g - T_{23} &= m_3a \\ T_{23} - \mu_k m_2g - T_{12} &= m_2a \\ T_{12} - m_1g &= m_1a \end{aligned}$$

Adding up the three equations and using  $m_1 = M, m_2 = m_3 = 2M$ , we obtain

$$2Mg - 2\mu_k Mg - Mg = 5Ma.$$

With  $a = 0.500 \text{ m/s}^2$  this yields  $\mu_k = 0.372$ . Thus, the coefficient of kinetic friction is roughly  $\mu_k = 0.37$ .

26. The free-body diagram for the sled is shown on the right, with  $\vec{F}$  being the force applied to the sled,  $\vec{F}_N$  the normal force of the inclined plane on the sled,  $m\vec{g}$  the force of gravity, and  $\vec{f}$  the force of friction. We take the  $+x$  direction to be along the inclined plane and the  $+y$  direction to be in its normal direction. The equations for the  $x$  and the  $y$  components of the force according to Newton's second law are:

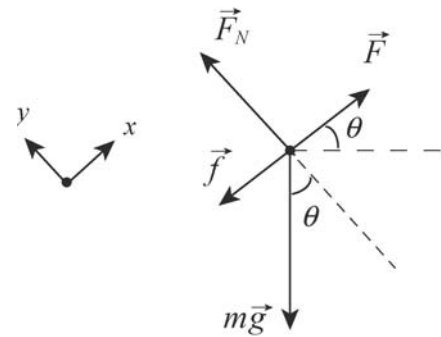

$$\begin{aligned} F_x &= F - f - mg \sin \theta = ma = 0 \\ F_y &= F_N - mg \cos \theta = 0 \end{aligned}$$

Now  $f = \mu F_N$ , and the second equation gives  $F_N = mg \cos \theta$ , which yields  $f = \mu mg \cos \theta$ . This expression is substituted for  $f$  in the first equation to obtain

$$F = mg(\sin \theta + \mu \cos \theta)$$


From Fig. 6-34, we see that  $F = 2.0 \text{ N}$  when  $\mu = 0$ . This implies  $mg \sin \theta = 2.0 \text{ N}$ . Similarly, we also find  $F = 5.0 \text{ N}$  when  $\mu = 0.5$ :

$$5.0 \text{ N} = mg(\sin \theta + 0.50 \cos \theta) = 2.0 \text{ N} + 0.50 mg \cos \theta$$

which yields  $mg \cos \theta = 6.0 \text{ N}$ . Combining the two results, we get

$$\tan \theta = \frac{2}{6} = \frac{1}{3} \Rightarrow \theta = 18^\circ.$$

27. The free-body diagrams for the two blocks are shown next.  $T$  is the magnitude of the tension force of the string,  $\vec{F}_{NA}$  is the normal force on block  $A$  (the leading block),  $\vec{F}_{NB}$  is the normal force on block  $B$ ,  $\vec{f}_A$  is kinetic friction force on block  $A$ ,  $\vec{f}_B$  is kinetic friction force on block  $B$ . Also,  $m_A$  is the mass of block  $A$  (where  $m_A = W_A/g$  and  $W_A = 3.6$  N), and  $m_B$  is the mass of block  $B$  (where  $m_B = W_B/g$  and  $W_B = 7.2$  N). The angle of the incline is  $\theta = 30^\circ$ .

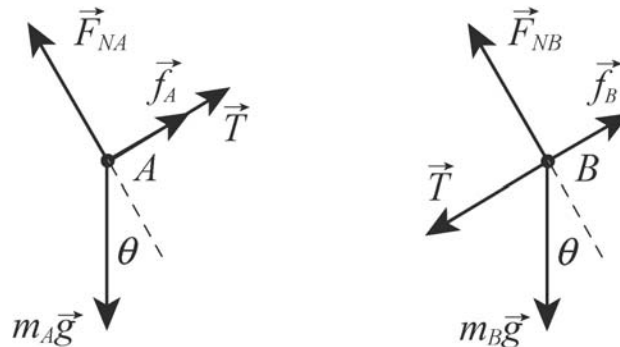

For each block we take  $+x$  downhill (which is toward the lower-left in these diagrams) and  $+y$  in the direction of the normal force. Applying Newton's second law to the  $x$  and  $y$  directions of both blocks  $A$  and  $B$ , we arrive at four equations:

$$W_A \sin \theta - f_A - T = m_A a$$

$$F_{NA} - W_A \cos \theta = 0$$

$$W_B \sin \theta - f_B + T = m_B a$$

$$F_{NB} - W_B \cos \theta = 0$$

which, when combined with Eq. 6-2 ( $f_A = \mu_{kA} F_{NA}$  where  $\mu_{kA} = 0.10$  and  $f_B = \mu_{kB} F_{NB}$  where  $\mu_{kB} = 0.20$ ), fully describe the dynamics of the system so long as the blocks have the same acceleration and  $T > 0$ .

(a) From these equations, we find the acceleration to be

$$a = g \left( \sin \theta - \left( \frac{\mu_{kA} W_A + \mu_{kB} W_B}{W_A + W_B} \right) \cos \theta \right) = 3.5 \text{ m/s}^2.$$

(b) We solve the above equations for the tension and obtain

$$T = \left( \frac{W_A W_B}{W_A + W_B} \right) (\mu_{kB} - \mu_{kA}) \cos \theta = 0.21 \text{ N}.$$

Simply returning the value for  $a$  found in part (a) into one of the above equations is certainly fine, and probably easier than solving for  $T$  algebraically as we have done, but the algebraic form does illustrate the  $\mu_{kB} - \mu_{kA}$  factor which aids in the understanding of the next part.




28. (a) Applying Newton's second law to the *system* (of total mass  $M = 60.0$  kg) and using Eq. 6-2 (with  $F_N = Mg$  in this case) we obtain

$$F - \mu_k Mg = Ma \Rightarrow a = 0.473 \text{ m/s}^2.$$

Next, we examine the forces just on  $m_3$  and find  $F_{32} = m_3(a + \mu_k g) = 147$  N. If the algebra steps are done more systematically, one ends up with the interesting relationship:  $F_{32} = (m_3 / M)F$  (which is independent of the friction!).

(b) As remarked at the end of our solution to part (a), the result does not depend on the frictional parameters. The answer here is the same as in part (a).

29. First, we check to see if the bodies start to move. We assume they remain at rest and compute the force of (static) friction which holds them there, and compare its magnitude with the maximum value  $\mu_s F_N$ . The free-body diagrams are shown below.  $T$  is the magnitude of the tension force of the string,  $f$  is the magnitude of the force of friction on body  $A$ ,  $F_N$  is the magnitude of the normal force of the plane on body  $A$ ,  $m_A \vec{g}$  is the force of gravity on body  $A$  (with magnitude  $W_A = 102$  N), and  $m_B \vec{g}$  is the force of gravity on body  $B$  (with magnitude  $W_B = 32$  N).  $\theta = 40^\circ$  is the angle of incline. We are told the direction of  $\vec{f}$  but we assume it is downhill. If we obtain a negative result for  $f$ , then we know the force is actually up the plane.

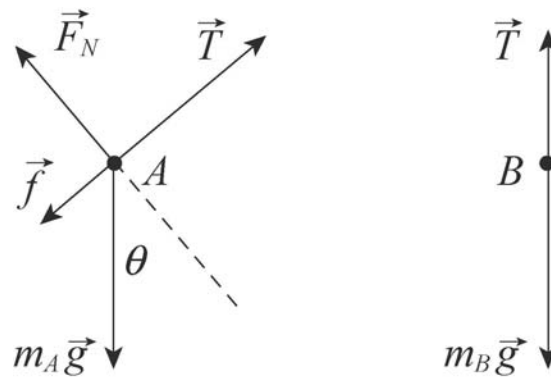

(a) For  $A$  we take the  $+x$  to be uphill and  $+y$  to be in the direction of the normal force. The  $x$  and  $y$  components of Newton's second law become

$$\begin{aligned} T - f - W_A \sin \theta &= 0 \\ F_N - W_A \cos \theta &= 0. \end{aligned}$$

Taking the positive direction to be *downward* for body  $B$ , Newton's second law leads to  $W_B - T = 0$ . Solving these three equations leads to

$$f = W_B - W_A \sin \theta = 32 \text{ N} - (102 \text{ N}) \sin 40^\circ = -34 \text{ N}$$

(indicating that the force of friction is *uphill*) and to

$$F_N = W_A \cos \theta = (102 \text{ N}) \cos 40^\circ = 78 \text{ N}$$

which means that

$$f_{s,\max} = \mu_s F_N = (0.56) (78 \text{ N}) = 44 \text{ N}.$$

Since the magnitude  $f$  of the force of friction that holds the bodies motionless is less than  $f_{s,\max}$  the bodies remain at rest. The acceleration is zero.

(b) Since  $A$  is moving up the incline, the force of friction is downhill with magnitude  $f_k = \mu_k F_N$ . Newton's second law, using the same coordinates as in part (a), leads to

$$\begin{aligned} T - f_k - W_A \sin \theta &= m_A a \\ F_N - W_A \cos \theta &= 0 \\ W_B - T &= m_B a \end{aligned}$$

for the two bodies. We solve for the acceleration:

$$\begin{aligned} a &= \frac{W_B - W_A \sin \theta - \mu_k W_A \cos \theta}{m_B + m_A} = \frac{32\text{N} - (102\text{N})\sin 40^\circ - (0.25)(102\text{N})\cos 40^\circ}{(32\text{N} + 102\text{N}) / (9.8\text{ m/s}^2)} \\ &= -3.9\text{ m/s}^2. \end{aligned}$$

The acceleration is down the plane, i.e.,  $\vec{a} = (-3.9\text{ m/s}^2)\hat{i}$ , which is to say (since the initial velocity was uphill) that the objects are slowing down. We note that  $m = W/g$  has been used to calculate the masses in the calculation above.

(c) Now body  $A$  is initially moving down the plane, so the force of friction is uphill with magnitude  $f_k = \mu_k F_N$ . The force equations become


$$\begin{aligned} T + f_k - W_A \sin \theta &= m_A a \\ F_N - W_A \cos \theta &= 0 \\ W_B - T &= m_B a \end{aligned}$$

which we solve to obtain

$$\begin{aligned} a &= \frac{W_B - W_A \sin \theta + \mu_k W_A \cos \theta}{m_B + m_A} = \frac{32\text{N} - (102\text{N})\sin 40^\circ + (0.25)(102\text{N})\cos 40^\circ}{(32\text{N} + 102\text{N}) / (9.8\text{ m/s}^2)} \\ &= -1.0\text{ m/s}^2. \end{aligned}$$

The acceleration is again downhill the plane, i.e.,  $\vec{a} = (-1.0\text{ m/s}^2)\hat{i}$ . In this case, the objects are speeding up.

30. The free-body diagrams are shown below.  $T$  is the magnitude of the tension force of the string,  $f$  is the magnitude of the force of friction on block  $A$ ,  $F_N$  is the magnitude of the normal force of the plane on block  $A$ ,  $m_A \vec{g}$  is the force of gravity on body  $A$  (where  $m_A = 10 \text{ kg}$ ), and  $m_B \vec{g}$  is the force of gravity on block  $B$ .  $\theta = 30^\circ$  is the angle of incline. For  $A$  we take the  $+x$  to be uphill and  $+y$  to be in the direction of the normal force; the positive direction is chosen *downward* for block  $B$ .

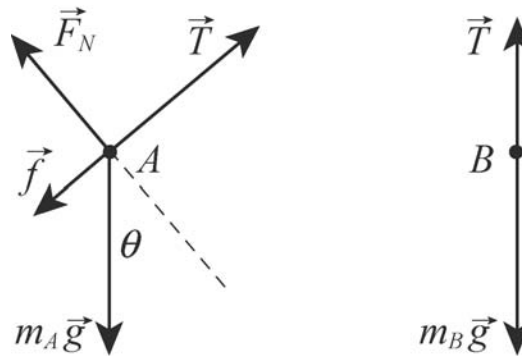

Since  $A$  is moving down the incline, the force of friction is uphill with magnitude  $f_k = \mu_k F_N$  (where  $\mu_k = 0.20$ ). Newton's second law leads to

$$\begin{aligned} T - f_k + m_A g \sin \theta &= m_A a = 0 \\ F_N - m_A g \cos \theta &= 0 \\ m_B g - T &= m_B a = 0 \end{aligned}$$

for the two bodies (where  $a = 0$  is a consequence of the velocity being constant). We solve these for the mass of block  $B$ .

$$m_B = m_A (\sin \theta - \mu_k \cos \theta) = 3.3 \text{ kg.}$$

31. (a) Free-body diagrams for the blocks  $A$  and  $C$ , considered as a single object, and for the block  $B$  are shown below.  $T$  is the magnitude of the tension force of the rope,  $F_N$  is the magnitude of the normal force of the table on block  $A$ ,  $f$  is the magnitude of the force of friction,  $W_{AC}$  is the combined weight of blocks  $A$  and  $C$  (the magnitude of force  $\vec{F}_{gAC}$  shown in the figure), and  $W_B$  is the weight of block  $B$  (the magnitude of force  $\vec{F}_{gB}$  shown). Assume the blocks are not moving. For the blocks on the table we take the  $x$  axis to be to the right and the  $y$  axis to be upward. From Newton's second law, we have


$$x \text{ component: } T - f = 0$$

$$y \text{ component: } F_N - W_{AC} = 0.$$

For block  $B$  take the downward direction to be positive. Then Newton's second law for that block is  $W_B - T = 0$ . The third equation gives  $T = W_B$  and the first gives  $f = T = W_B$ . The second equation gives  $F_N = W_{AC}$ . If sliding is not to occur,  $f$  must be less than  $\mu_s F_N$ , or  $W_B < \mu_s W_{AC}$ . The smallest that  $W_{AC}$  can be with the blocks still at rest is

$$W_{AC} = W_B / \mu_s = (22 \text{ N}) / (0.20) = 110 \text{ N}.$$

Since the weight of block  $A$  is 44 N, the least weight for  $C$  is  $(110 - 44) \text{ N} = 66 \text{ N}$ .

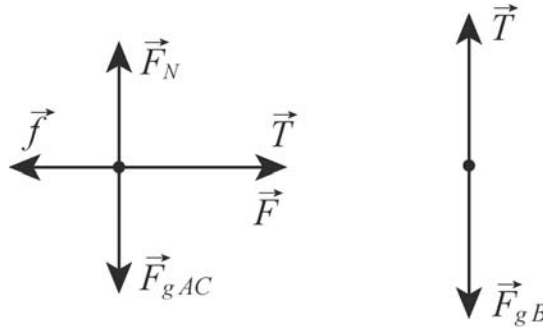

(b) The second law equations become

$$\begin{aligned} T - f &= (W_A/g)a \\ F_N - W_A &= 0 \\ W_B - T &= (W_B/g)a. \end{aligned}$$

In addition,  $f = \mu_k F_N$ . The second equation gives  $F_N = W_A$ , so  $f = \mu_k W_A$ . The third gives  $T = W_B - (W_B/g)a$ . Substituting these two expressions into the first equation, we obtain

$$W_B - (W_B/g)a - \mu_k W_A = (W_A/g)a.$$

Therefore,

$$a = \frac{g(W_B - \mu_k W_A)}{W_A + W_B} = \frac{(9.8 \text{ m/s}^2)(22 \text{ N} - (0.15)(44 \text{ N}))}{44 \text{ N} + 22 \text{ N}} = 2.3 \text{ m/s}^2.$$

32. We use the familiar horizontal and vertical axes for  $x$  and  $y$  directions, with rightward and upward positive, respectively. The rope is assumed massless so that the force exerted by the child  $\vec{F}$  is identical to the tension uniformly through the rope. The  $x$  and  $y$  components of  $\vec{F}$  are  $F\cos\theta$  and  $F\sin\theta$ , respectively. The static friction force points leftward.

(a) Newton's Law applied to the  $y$ -axis, where there is presumed to be no acceleration, leads to

$$F_N + F\sin\theta - mg = 0$$

which implies that the maximum static friction is  $\mu_s(mg - F\sin\theta)$ . If  $f_s = f_{s, \max}$  is assumed, then Newton's second law applied to the  $x$  axis (which also has  $a = 0$  even though it is "verging" on moving) yields

$$F\cos\theta - f_s = ma \Rightarrow F\cos\theta - \mu_s(mg - F\sin\theta) = 0$$

which we solve, for  $\theta = 42^\circ$  and  $\mu_s = 0.42$ , to obtain  $F = 74$  N.

(b) Solving the above equation algebraically for  $F$ , with  $W$  denoting the weight, we obtain

$$F = \frac{\mu_s W}{\cos\theta + \mu_s \sin\theta} = \frac{(0.42)(180 \text{ N})}{\cos\theta + (0.42) \sin\theta} = \frac{76 \text{ N}}{\cos\theta + (0.42) \sin\theta}.$$

(c) We minimize the above expression for  $F$  by working through the condition:

$$\frac{dF}{d\theta} = \frac{\mu_s W (\sin\theta - \mu_s \cos\theta)}{(\cos\theta + \mu_s \sin\theta)^2} = 0$$


which leads to the result  $\theta = \tan^{-1} \mu_s = 23^\circ$ .

(d) Plugging  $\theta = 23^\circ$  into the above result for  $F$ , with  $\mu_s = 0.42$  and  $W = 180$  N, yields  $F = 70$  N.

33. The free-body diagrams for the two blocks, treated individually, are shown below (first  $m$  and then  $M$ ).  $F'$  is the contact force between the two blocks, and the static friction force  $\vec{f}_s$  is at its maximum value (so Eq. 6-1 leads to  $f_s = f_{s,\max} = \mu_s F'$  where  $\mu_s = 0.38$ ).

Treating the two blocks together as a single system (sliding across a frictionless floor), we apply Newton's second law (with  $+x$  rightward) to find an expression for the acceleration:

$$F = m_{\text{total}} a \Rightarrow a = \frac{F}{m + M}$$

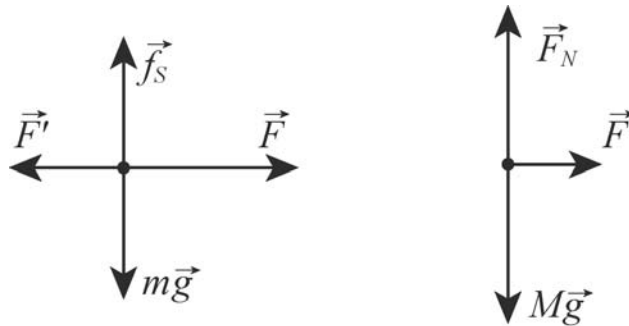

This is equivalent to having analyzed the two blocks individually and then combined their equations. Now, when we analyze the small block individually, we apply Newton's second law to the  $x$  and  $y$  axes, substitute in the above expression for  $a$ , and use Eq. 6-1.

$$F - F' = ma \Rightarrow F' = F - m \left( \frac{F}{m + M} \right)$$


$$f_s - mg = 0 \Rightarrow \mu_s F' - mg = 0$$

These expressions are combined (to eliminate  $F'$ ) and we arrive at

$$F = \frac{mg}{\mu_s \left( 1 - \frac{m}{m + M} \right)}$$

which we find to be  $F = 4.9 \times 10^2 \text{ N}$ .

34. The free-body diagrams for the slab and block are shown below.

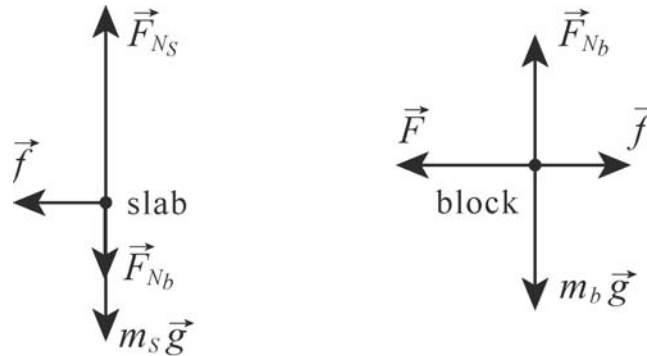

$\vec{F}$  is the 100 N force applied to the block,  $\vec{F}_{Ns}$  is the normal force of the floor on the slab,  $F_{Nb}$  is the magnitude of the normal force between the slab and the block,  $\vec{f}$  is the force of friction between the slab and the block,  $m_s$  is the mass of the slab, and  $m_b$  is the mass of the block. For both objects, we take the  $+x$  direction to be to the right and the  $+y$  direction to be up.

Applying Newton's second law for the  $x$  and  $y$  axes for (first) the slab and (second) the block results in four equations:

$$\begin{aligned} -f &= m_s a_s \\ F_{Ns} - F_{Nb} - m_s g &= 0 \\ f - F &= m_b a_b \\ F_{Nb} - m_b g &= 0 \end{aligned}$$

from which we note that the maximum possible static friction magnitude would be

$$\mu_s F_{Nb} = \mu_s m_b g = (0.60)(10 \text{ kg})(9.8 \text{ m/s}^2) = 59 \text{ N}.$$

We check to see if the block slides on the slab. Assuming it does not, then  $a_s = a_b$  (which we denote simply as  $a$ ) and we solve for  $f$ :

$$f = \frac{m_s F}{m_s + m_b} = \frac{(40 \text{ kg})(100 \text{ N})}{40 \text{ kg} + 10 \text{ kg}} = 80 \text{ N}$$

which is greater than  $f_{s,\max}$  so that we conclude the block is sliding across the slab (their accelerations are different).

(a) Using  $f = \mu_k F_{Nb}$  the above equations yield

$$a_b = \frac{\mu_k m_b g - F}{m_b} = \frac{(0.40)(10 \text{ kg})(9.8 \text{ m/s}^2) - 100 \text{ N}}{10 \text{ kg}} = -6.1 \text{ m/s}^2.$$

The negative sign means that the acceleration is leftward. That is,  $\vec{a}_b = (-6.1 \text{ m/s}^2)\hat{i}$



(b) We also obtain

$$a_s = -\frac{\mu_k m_b g}{m_s} = -\frac{(0.40)(10 \text{ kg})(9.8 \text{ m/s}^2)}{40 \text{ kg}} = -0.98 \text{ m/s}^2.$$

As mentioned above, this means it accelerates to the left. That is,  $\vec{a}_s = (-0.98 \text{ m/s}^2)\hat{i}$

35. We denote the magnitude of the frictional force  $\alpha v$ , where  $\alpha = 70 \text{ N} \cdot \text{s}/\text{m}$ . We take the direction of the boat's motion to be positive. Newton's second law gives

$$-\alpha v = m \frac{dv}{dt}.$$

Thus,

$$\int_{v_0}^v \frac{dv}{v} = -\frac{\alpha}{m} \int_0^t dt$$

where  $v_0$  is the velocity at time zero and  $v$  is the velocity at time  $t$ . The integrals are evaluated with the result

$$\ln \left( \frac{v}{v_0} \right) = -\frac{\alpha t}{m}$$

We take  $v = v_0/2$  and solve for time:

$$t = \frac{m}{\alpha} \ln 2 = \frac{1000 \text{ kg}}{70 \text{ N} \cdot \text{s}/\text{m}} \ln 2 = 9.9 \text{ s}.$$

36. Using Eq. 6-16, we solve for the area

$$A \frac{2m g}{C \rho v_i^2}$$

which illustrates the inverse proportionality between the area and the speed-squared. Thus, when we set up a ratio of areas – of the slower case to the faster case – we obtain

$$\frac{A_{\text{slow}}}{A_{\text{fast}}} = \left( \frac{310 \text{ km/h}}{160 \text{ km/h}} \right)^2 = 3.75.$$

37. For the passenger jet  $D_j = \frac{1}{2} C \rho_1 A v_j^2$ , and for the prop-driven transport  $D_t = \frac{1}{2} C \rho_2 A v_t^2$ , where  $\rho_1$  and  $\rho_2$  represent the air density at 10 km and 5.0 km, respectively. Thus the ratio in question is

$$\frac{D_j}{D_t} = \frac{\rho_1 v_j^2}{\rho_2 v_t^2} = \frac{(0.38 \text{ kg/m}^3)(1000 \text{ km/h})^2}{(0.67 \text{ kg/m}^3)(500 \text{ km/h})^2} = 2.3.$$

38. This problem involves Newton's second law for motion along the slope.

(a) The force along the slope is given by

$$\begin{aligned} F_g &= mg \sin \theta - \mu F_N = mg \sin \theta - \mu mg \cos \theta = mg(\sin \theta - \mu \cos \theta) \\ &= (85.0 \text{ kg})(9.80 \text{ m/s}^2) [\sin 40.0^\circ - (0.04000) \cos 40.0^\circ] \\ &= 510 \text{ N.} \end{aligned}$$

Thus, the terminal speed of the skier is

$$v_t = \sqrt{\frac{2F_g}{C\rho A}} = \sqrt{\frac{2(510 \text{ N})}{(0.150)(1.20 \text{ kg/m}^3)(1.30 \text{ m}^2)}} = 66.0 \text{ m/s.}$$

(b) Differentiating  $v_t$  with respect to  $C$ , we obtain

$$\begin{aligned} dv_t &= -\frac{1}{2} \sqrt{\frac{2F_g}{\rho A}} C^{-3/2} dC = -\frac{1}{2} \sqrt{\frac{2(510 \text{ N})}{(1.20 \text{ kg/m}^3)(1.30 \text{ m}^2)}} (0.150)^{-3/2} dC \\ &= -(2.20 \times 10^2 \text{ m/s}) dC. \end{aligned}$$

39. In the solution to exercise 4, we found that the force provided by the wind needed to equal  $F = 157 \text{ N}$  (where that last figure is not “significant”).

(a) Setting  $F = D$  (for Drag force) we use Eq. 6-14 to find the wind speed  $V$  along the ground (which actually is relative to the moving stone, but we assume the stone is moving slowly enough that this does not invalidate the result):

$$V = \sqrt{\frac{2F}{C\rho A}} = \sqrt{\frac{2(157 \text{ N})}{(0.80)(1.21 \text{ kg/m}^3)(0.040 \text{ m}^2)}} = 90 \text{ m/s} = 3.2 \times 10^2 \text{ km/h}.$$

(b) Doubling our previous result, we find the reported speed to be  $6.5 \times 10^2 \text{ km/h}$ .

(c) The result is not reasonable for a terrestrial storm. A category 5 hurricane has speeds on the order of  $2.6 \times 10^2 \text{ m/s}$ .

40. (a) From Table 6-1 and Eq. 6-16, we have

$$v_t = \sqrt{\frac{2F_g}{C\rho A}} \Rightarrow C\rho A = 2 \frac{mg}{v_t^2}$$

where  $v_t = 60$  m/s. We estimate the pilot's mass at about  $m = 70$  kg. Now, we convert  $v = 1300(1000/3600) \approx 360$  m/s and plug into Eq. 6-14:

$$D = \frac{1}{2} C\rho A v^2 = \frac{1}{2} \left( 2 \frac{mg}{v_t^2} \right) v^2 = mg \left( \frac{v}{v_t} \right)^2$$

which yields  $D = (70 \text{ kg})(9.8 \text{ m/s}^2)(360/60)^2 \approx 2 \times 10^4 \text{ N}$ .

(b) We assume the mass of the ejection seat is roughly equal to the mass of the pilot. Thus, Newton's second law (in the horizontal direction) applied to this system of mass  $2m$  gives the magnitude of acceleration:

$$|a| = \frac{D}{2m} = \frac{g}{2} \left( \frac{v}{v_t} \right)^2 = 18g .$$

41. The magnitude of the acceleration of the cyclist as it rounds the curve is given by  $v^2/R$ , where  $v$  is the speed of the cyclist and  $R$  is the radius of the curve. Since the road is horizontal, only the frictional force of the road on the tires makes this acceleration possible. The horizontal component of Newton's second law is  $f = mv^2/R$ . If  $F_N$  is the normal force of the road on the bicycle and  $m$  is the mass of the bicycle and rider, the vertical component of Newton's second law leads to  $F_N = mg$ . Thus, using Eq. 6-1, the maximum value of static friction is  $f_{s,\max} = \mu_s F_N = \mu_s mg$ . If the bicycle does not slip,  $f \leq \mu_s mg$ . This means

$$\frac{v^2}{R} \leq \mu_s g \Rightarrow R \geq \frac{v^2}{\mu_s g}.$$

Consequently, the minimum radius with which a cyclist moving at  $29 \text{ km/h} = 8.1 \text{ m/s}$  can round the curve without slipping is

$$R_{\min} = \frac{v^2}{\mu_s g} = \frac{(8.1 \text{ m/s})^2}{(0.32)(9.8 \text{ m/s}^2)} = 21 \text{ m}.$$



42. With  $v = 96.6 \text{ km/h} = 26.8 \text{ m/s}$ , Eq. 6-17 readily yields

$$a = \frac{v^2}{R} = \frac{(26.8 \text{ m/s})^2}{7.6 \text{ m}} = 94.7 \text{ m/s}^2$$

which we express as a multiple of  $g$ :

$$a = \left( \frac{a}{g} \right) g = \left( \frac{94.7 \text{ m/s}^2}{9.80 \text{ m/s}^2} \right) g = 9.7g.$$

43. Perhaps surprisingly, the equations pertaining to this situation are exactly those in Sample Problem 6-9, although the logic is a little different. In the Sample Problem, the car moves along a (stationary) road, whereas in this problem the cat is stationary relative to the merry-go-around platform. But the static friction plays the same role in both cases since the bottom-most point of the car tire is instantaneously at rest with respect to the race track, just as static friction applies to the contact surface between cat and platform. Using Eq. 6-23 with Eq. 4-35, we find

$$\mu_s = (2\pi R/T)^2/gR = 4\pi^2 R/gT^2.$$

With  $T = 6.0$  s and  $R = 5.4$  m, we obtain  $\mu_s = 0.60$ .

44. The magnitude of the acceleration of the car as it rounds the curve is given by  $v^2/R$ , where  $v$  is the speed of the car and  $R$  is the radius of the curve. Since the road is horizontal, only the frictional force of the road on the tires makes this acceleration possible. The horizontal component of Newton's second law is  $f = mv^2/R$ . If  $F_N$  is the normal force of the road on the car and  $m$  is the mass of the car, the vertical component of Newton's second law leads to  $F_N = mg$ . Thus, using Eq. 6-1, the maximum value of static friction is

$$f_{s,\max} = \mu_s F_N = \mu_s mg.$$

If the car does not slip,  $f \leq \mu_s mg$ . This means

$$\frac{v^2}{R} \leq \mu_s g \Rightarrow v \leq \sqrt{\mu_s Rg}.$$

Consequently, the maximum speed with which the car can round the curve without slipping is

$$v_{\max} = \sqrt{\mu_s Rg} = \sqrt{(0.60)(30.5 \text{ m})(9.8 \text{ m/s}^2)} = 13 \text{ m/s} \approx 48 \text{ km/h}.$$

45. (a) Eq. 4-35 gives  $T = 2\pi R/v = 2\pi(10 \text{ m})/(6.1 \text{ m/s}) = 10 \text{ s}$ .

(b) The situation is similar to that of Sample Problem 6-7 but with the normal force direction reversed. Adapting Eq. 6-19, we find

$$F_N = m(g - v^2/R) = 486 \text{ N} \approx 4.9 \times 10^2 \text{ N}.$$

(c) Now we reverse both the normal force direction and the acceleration direction (from what is shown in Sample Problem 6-7) and adapt Eq. 6-19 accordingly. Thus we obtain

$$F_N = m(g + v^2/R) = 1081 \text{ N} \approx 1.1 \text{ kN}.$$

46. We will start by assuming that the normal force (on the car from the rail) points up. Note that gravity points down, and the  $y$  axis is chosen positive upwards. Also, the direction to the center of the circle (the direction of centripetal acceleration) is down. Thus, Newton's second law leads to

$$F_N - mg = m \left( -\frac{v^2}{r} \right).$$

(a) When  $v = 11$  m/s, we obtain  $F_N = 3.7 \times 10^3$  N.

(b)  $\vec{F}_N$  points upward.

(c) When  $v = 14$  m/s, we obtain  $F_N = -1.3 \times 10^3$  N, or  $|F_N| = 1.3 \times 10^3$  N.

(d) The fact that this answer is negative means that  $\vec{F}_N$  points opposite to what we had assumed. Thus, the magnitude of  $\vec{F}_N$  is  $|\vec{F}_N| = 1.3$  kN and its direction is *down*.

47. At the top of the hill, the situation is similar to that of Sample Problem 6-7 but with the normal force direction reversed. Adapting Eq. 6-19, we find

$$F_N = m(g - v^2/R).$$

Since  $F_N = 0$  there (as stated in the problem) then  $v^2 = gR$ . Later, at the bottom of the valley, we reverse both the normal force direction and the acceleration direction (from what is shown in Sample Problem 6-7) and adapt Eq. 6-19 accordingly. Thus we obtain

$$F_N = m(g + v^2/R) = 2mg = 1372 \text{ N} \approx 1.37 \times 10^3 \text{ N}.$$

48. (a) We note that the speed 80.0 km/h in SI units is roughly 22.2 m/s. The horizontal force that keeps her from sliding must equal the centripetal force (Eq. 6-18), and the upward force on her must equal  $mg$ . Thus,

$$F_{\text{net}} = \sqrt{(mg)^2 + (mv^2/R)^2} = 547 \text{ N}.$$

(b) The angle is  $\tan^{-1}[(mv^2/R)/(mg)] = \tan^{-1}(v^2/gR) = 9.53^\circ$  (as measured from a vertical axis).

49. (a) At the top (the highest point in the circular motion) the seat pushes up on the student with a force of magnitude  $F_N = 556 \text{ N}$ . Earth pulls down with a force of magnitude  $W = 667 \text{ N}$ . The seat is pushing up with a force that is smaller than the student's weight, and we say the student experiences a decrease in his "apparent weight" at the highest point. Thus, he feels "light."

(b) Now  $F_N$  is the magnitude of the upward force exerted by the seat when the student is at the lowest point. The net force toward the center of the circle is  $F_b - W = mv^2/R$  (note that we are now choosing upward as the positive direction). The Ferris wheel is "steadily rotating" so the value  $mv^2/R$  is the same as in part (a). Thus,

$$F_N = \frac{mv^2}{R} + W = 111 \text{ N} + 667 \text{ N} = 778 \text{ N}.$$

(c) If the speed is doubled,  $mv^2/R$  increases by a factor of 4, to  $444 \text{ N}$ . Therefore, at the highest point we have  $W - F_N = mv^2/R$ , which leads to

$$F_N = 667 \text{ N} - 444 \text{ N} = 223 \text{ N}.$$

(d) Similarly, the normal force at the lowest point is now found to be

$$F_N = 667 \text{ N} + 444 \text{ N} \approx 1.11 \text{ kN}.$$



50. The situation is somewhat similar to that shown in the “loop-the-loop” example done in the textbook (see Figure 6-10) except that, instead of a downward normal force, we are dealing with the force of the boom  $\vec{F}_B$  on the car – which is capable of pointing any direction. We will assume it to be upward as we apply Newton’s second law to the car (of total weight 5000 N):  $F_B - W = ma$  where  $m = W/g$  and  $a = -v^2/r$ . Note that the centripetal acceleration is downward (our choice for negative direction) for a body at the top of its circular trajectory.

(a) If  $r = 10$  m and  $v = 5.0$  m/s, we obtain  $F_B = 3.7 \times 10^3$  N = 3.7 kN.

(b) The direction of  $\vec{F}_B$  is up.


(c) If  $r = 10$  m and  $v = 12$  m/s, we obtain  $F_B = -2.3 \times 10^3$  N = -2.3 kN, or  $|F_B| = 2.3$  kN.

(d) The minus sign indicates that  $\vec{F}_B$  points downward.

51. The free-body diagram (for the hand straps of mass  $m$ ) is the view that a passenger might see if she was looking forward and the streetcar was curving towards the right (so  $\vec{a}$  points rightwards in the figure). We note that  $|\vec{a}| = v^2 / R$  where  $v = 16 \text{ km/h} = 4.4 \text{ m/s}$ .

Applying Newton's law to the axes of the problem ( $+x$  is rightward and  $+y$  is upward) we obtain

$$\begin{aligned} T \sin \theta &= m \frac{v^2}{R} \\ T \cos \theta &= mg. \end{aligned}$$

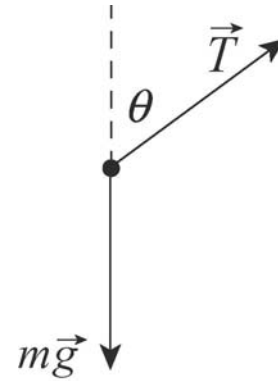

We solve these equations for the angle:

$$\theta = \tan^{-1} \left( \frac{v^2}{Rg} \right)$$

which yields  $\theta = 12^\circ$ .

52. The centripetal force on the passenger is  $F = mv^2 / r$ .

(a) The variation of  $F$  with respect to  $r$  while holding  $v$  constant is

$$dF = -\frac{mv^2}{r^2} dr.$$

(b) The variation of  $F$  with respect to  $v$  while holding  $r$  constant is

$$dF = \frac{2mv}{r} dv.$$

(c) The period of the circular ride is  $T = 2\pi r / v$ . Thus,

$$F = \frac{mv^2}{r} = \frac{m}{r} \left( \frac{2\pi r}{T} \right)^2 = \frac{4\pi^2 mr}{T^2},$$

and the variation of  $F$  with respect to  $T$  while holding  $r$  constant is

$$dF = -\frac{8\pi^2 mr}{T^3} dT = -8\pi^2 mr \left( \frac{v}{2\pi r} \right)^3 dT = -\left( \frac{mv^3}{\pi r^2} \right) dT.$$

53. The free-body diagram (for the airplane of mass  $m$ ) is shown below. We note that  $\vec{F}_\ell$  is the force of aerodynamic lift and  $\vec{a}$  points rightwards in the figure. We also note that  $|\vec{a}| = v^2 / R$  where  $v = 480 \text{ km/h} = 133 \text{ m/s}$ .


Applying Newton's law to the axes of the problem (+ $x$  rightward and + $y$  upward) we obtain

$$\begin{aligned} F_\ell \sin \theta &= m \frac{v^2}{R} \\ F_\ell \cos \theta &= mg \end{aligned}$$

where  $\theta = 40^\circ$ . Eliminating mass from these equations leads to

$$\tan \theta = \frac{v^2}{gR}$$

which yields  $R = v^2 / g \tan \theta = 2.2 \times 10^3 \text{ m}$ .

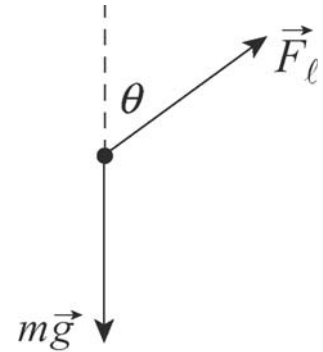

54. The centripetal force on the passenger is  $F = mv^2 / r$ .

(a) The slope of the plot at  $v = 8.30 \text{ m/s}$  is

$$\left. \frac{dF}{dv} \right|_{v=8.30 \text{ m/s}} = \left. \frac{2mv}{r} \right|_{v=8.30 \text{ m/s}} = \frac{2(85.0 \text{ kg})(8.30 \text{ m/s})}{3.50 \text{ m}} = 403 \text{ N} \cdot \text{s/m}.$$

(b) The period of the circular ride is  $T = 2\pi r / v$ . Thus,

$$F = \frac{mv^2}{r} = \frac{m}{r} \left( \frac{2\pi r}{T} \right)^2 = \frac{4\pi^2 mr}{T^2},$$

and the variation of  $F$  with respect to  $T$  while holding  $r$  constant is

$$dF = -\frac{8\pi^2 mr}{T^3} dT.$$

The slope of the plot at  $T = 2.50 \text{ s}$  is

$$\left. \frac{dF}{dT} \right|_{T=2.50 \text{ s}} = -\left. \frac{8\pi^2 mr}{T^3} \right|_{T=2.50 \text{ s}} = \frac{8\pi^2 (85.0 \text{ kg})(3.50 \text{ m})}{(2.50 \text{ s})^3} = -1.50 \times 10^3 \text{ N/s}.$$

55. For the puck to remain at rest the magnitude of the tension force  $T$  of the cord must equal the gravitational force  $Mg$  on the cylinder. The tension force supplies the centripetal force that keeps the puck in its circular orbit, so  $T = mv^2/r$ . Thus  $Mg = mv^2/r$ . We solve for the speed:

$$v = \sqrt{\frac{Mg r}{m}} = \sqrt{\frac{(2.50 \text{ kg})(9.80 \text{ m/s}^2)(0.200 \text{ m})}{1.50 \text{ kg}}} = 1.81 \text{ m/s}.$$

56. (a) Using the kinematic equation given in Table 2-1, the deceleration of the car is

$$v^2 = v_0^2 + 2ad \Rightarrow 0 = (35 \text{ m/s})^2 + 2a(107 \text{ m})$$

which gives  $a = -5.72 \text{ m/s}^2$ . Thus, the force of friction required to stop by car is

$$f = m|a| = (1400 \text{ kg})(5.72 \text{ m/s}^2) \approx 8.0 \times 10^3 \text{ N}.$$

(b) The maximum possible static friction is

$$f_{s,\max} = \mu_s mg = (0.50)(1400 \text{ kg})(9.80 \text{ m/s}^2) \approx 6.9 \times 10^3 \text{ N}.$$

(c) If  $\mu_k = 0.40$ , then  $f_k = \mu_k mg$  and the deceleration is  $a = -\mu_k g$ . Therefore, the speed of the car when it hits the wall is

$$v = \sqrt{v_0^2 + 2ad} = \sqrt{(35 \text{ m/s})^2 - 2(0.40)(9.8 \text{ m/s}^2)(107 \text{ m})} \approx 20 \text{ m/s}.$$

(d) The force required to keep the motion circular is

$$F_r = \frac{mv_0^2}{r} = \frac{(1400 \text{ kg})(35.0 \text{ m/s})^2}{107 \text{ m}} = 1.6 \times 10^4 \text{ N}.$$

(e) Since  $F_r > f_{s,\max}$ , no circular path is possible.

57. We note that the period  $T$  is eight times the time between flashes ( $\frac{1}{2000}$  s), so  $T = 0.0040$  s. Combining Eq. 6-18 with Eq. 4-35 leads to

$$F = \frac{4m\pi^2 R}{T^2} = \frac{4(0.030 \text{ kg})\pi^2(0.035 \text{ m})}{(0.0040 \text{ s})^2} = 2.6 \times 10^3 \text{ N} .$$



58. We refer the reader to Sample Problem 6-10, and use the result Eq. 6-26:

$$\theta = \tan^{-1} \left( \frac{v^2}{gR} \right)$$

with  $v = 60(1000/3600) = 17$  m/s and  $R = 200$  m. The banking angle is therefore  $\theta = 8.1^\circ$ . Now we consider a vehicle taking this banked curve at  $v' = 40(1000/3600) = 11$  m/s. Its (horizontal) acceleration is  $a' = v'^2/R$ , which has components parallel the incline and perpendicular to it:

$$a_{\parallel} = a' \cos \theta = \frac{v'^2 \cos \theta}{R}$$

$$a_{\perp} = a' \sin \theta = \frac{v'^2 \sin \theta}{R}.$$

These enter Newton's second law as follows (choosing downhill as the  $+x$  direction and away-from-incline as  $+y$ ):

$$mg \sin \theta - f_s = ma_{\parallel}$$


$$F_N - mg \cos \theta = ma_{\perp}$$

and we are led to

$$\frac{f_s}{F_N} = \frac{mg \sin \theta - mv'^2 \cos \theta / R}{mg \cos \theta + mv'^2 \sin \theta / R}.$$

We cancel the mass and plug in, obtaining  $f_s/F_N = 0.078$ . The problem implies we should set  $f_s = f_{s,\max}$  so that, by Eq. 6-1, we have  $\mu_s = 0.078$ .

59. The free-body diagram for the ball is shown below.  $\vec{T}_u$  is the tension exerted by the upper string on the ball,  $\vec{T}_\ell$  is the tension force of the lower string, and  $m$  is the mass of the ball. Note that the tension in the upper string is greater than the tension in the lower string. It must balance the downward pull of gravity and the force of the lower string.

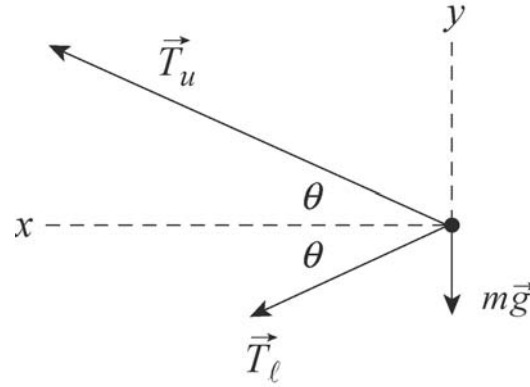

(a) We take the  $+x$  direction to be leftward (toward the center of the circular orbit) and  $+y$  upward. Since the magnitude of the acceleration is  $a = v^2/R$ , the  $x$  component of Newton's second law is

$$T_u \cos \theta + T_\ell \cos \theta = \frac{mv^2}{R},$$

where  $v$  is the speed of the ball and  $R$  is the radius of its orbit. The  $y$  component is

$$T_u \sin \theta - T_\ell \sin \theta - mg = 0.$$

The second equation gives the tension in the lower string:  $T_\ell = T_u - mg / \sin \theta$ . Since the triangle is equilateral  $\theta = 30.0^\circ$ . Thus

$$T_\ell = 35.0 \text{ N} - \frac{(1.34 \text{ kg})(9.80 \text{ m/s}^2)}{\sin 30.0^\circ} = 8.74 \text{ N}.$$

(b) The net force has magnitude

$$F_{\text{net,str}} = (T_u + T_\ell) \cos \theta = (35.0 \text{ N} + 8.74 \text{ N}) \cos 30.0^\circ = 37.9 \text{ N}.$$

(c) The radius of the path is

$$R = ((1.70 \text{ m})/2) \tan 30.0^\circ = 1.47 \text{ m}.$$

Using  $F_{\text{net,str}} = mv^2/R$ , we find that the speed of the ball is

$$v = \sqrt{\frac{RF_{\text{net,str}}}{m}} = \sqrt{\frac{(1.47 \text{ m})(37.9 \text{ N})}{1.34 \text{ kg}}} = 6.45 \text{ m/s}.$$

(d) The direction of  $\vec{F}_{\text{net,str}}$  is leftward (“radially inward”).

60. (a) We note that  $R$  (the horizontal distance from the bob to the axis of rotation) is the circumference of the circular path divided by  $2\pi$ , therefore,  $R = 0.94/2\pi = 0.15$  m. The angle that the cord makes with the horizontal is now easily found:

$$\theta = \cos^{-1}(R/L) = \cos^{-1}(0.15 \text{ m}/0.90 \text{ m}) = 80^\circ.$$

The vertical component of the force of tension in the string is  $T\sin\theta$  and must equal the downward pull of gravity ( $mg$ ). Thus,

$$T = \frac{mg}{\sin\theta} = 0.40 \text{ N}.$$

Note that we are using  $T$  for tension (not for the period).

(b) The horizontal component of that tension must supply the centripetal force (Eq. 6-18), so we have  $T\cos\theta = mv^2/R$ . This gives speed  $v = 0.49$  m/s. This divided into the circumference gives the time for one revolution:  $0.94/0.49 = 1.9$  s.

61. The layer of ice has a mass of

$$m_{\text{ice}} = (917 \text{ kg/m}^3) (400 \text{ m} \times 500 \text{ m} \times 0.0040 \text{ m}) = 7.34 \times 10^5 \text{ kg}.$$

This added to the mass of the hundred stones (at 20 kg each) comes to  $m = 7.36 \times 10^5 \text{ kg}$ .

(a) Setting  $F = D$  (for Drag force) we use Eq. 6-14 to find the wind speed  $v$  along the ground (which actually is relative to the moving stone, but we assume the stone is moving slowly enough that this does not invalidate the result):

$$v = \sqrt{\frac{\mu_k mg}{4C_{\text{ice}} \rho A_{\text{ice}}}} = \sqrt{\frac{(0.10)(7.36 \times 10^5 \text{ kg})(9.8 \text{ m/s}^2)}{4(0.002)(1.21 \text{ kg/m}^3)(400 \times 500 \text{ m}^2)}} = 19 \text{ m/s} \approx 69 \text{ km/h}.$$

(b) Doubling our previous result, we find the reported speed to be 139 km/h.

(c) The result is reasonable for storm winds. (A category-5 hurricane has speeds on the order of  $2.6 \times 10^2 \text{ m/s}$ .)


62. (a) To be on the verge of sliding out means that the force of static friction is acting “down the bank” (in the sense explained in the problem statement) with maximum possible magnitude. We first consider the vector sum  $\vec{F}$  of the (maximum) static friction force and the normal force. Due to the facts that they are perpendicular and their magnitudes are simply proportional (Eq. 6-1), we find  $\vec{F}$  is at angle (measured from the *vertical* axis)  $\phi = \theta + \theta_s$ , where  $\tan \theta_s = \mu_s$  (compare with Eq. 6-13), and  $\theta$  is the bank angle (as stated in the problem). Now, the vector sum of  $\vec{F}$  and the vertically downward pull ( $mg$ ) of gravity must be equal to the (horizontal) centripetal force ( $mv^2/R$ ), which leads to a surprisingly simple relationship:

$$\tan \phi = \frac{mv^2 / R}{mg} = \frac{v^2}{Rg} .$$

Writing this as an expression for the maximum speed, we have

$$v_{\max} = \sqrt{Rg \tan(\theta + \tan^{-1} \mu_s)} = \sqrt{\frac{Rg(\tan \theta + \mu_s)}{1 - \mu_s \tan \theta}}$$

(b) The graph is shown below (with  $\theta$  in radians):

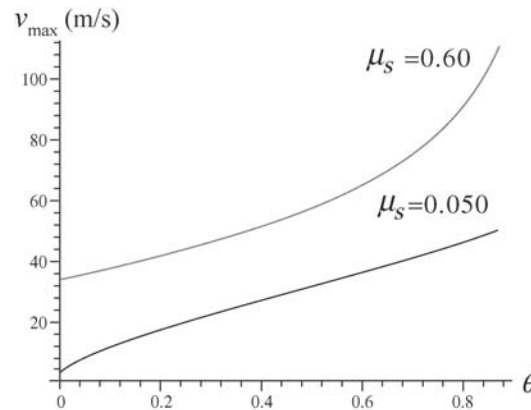

(c) Either estimating from the graph ( $\mu_s = 0.60$ , upper curve) or calculated it more carefully leads to  $v = 41.3 \text{ m/s} = 149 \text{ km/h}$  when  $\theta = 10^\circ = 0.175 \text{ radian}$ .

(d) Similarly (for  $\mu_s = 0.050$ , the lower curve) we find  $v = 21.2 \text{ m/s} = 76.2 \text{ km/h}$  when  $\theta = 10^\circ = 0.175 \text{ radian}$ .

63. (a) With  $\theta = 60^\circ$ , we apply Newton's second law to the "downhill" direction:

$$mg \sin \theta - f = ma$$

$$f = f_k = \mu_k F_N = \mu_k mg \cos \theta.$$

Thus,

$$a = g(\sin \theta - \mu_k \cos \theta) = 7.5 \text{ m/s}^2.$$

(b) The direction of the acceleration  $\vec{a}$  is down the slope.

(c) Now the friction force is in the "downhill" direction (which is our positive direction) so that we obtain

$$a = g(\sin \theta + \mu_k \cos \theta) = 9.5 \text{ m/s}^2.$$

(d) The direction is down the slope.

64. Note that since no static friction coefficient is mentioned, we assume  $f_s$  is not relevant to this computation. We apply Newton's second law to each block's  $x$  axis, which for  $m_1$  is positive rightward and for  $m_2$  is positive downhill:

$$\begin{aligned} T - f_k &= m_1 a \\ m_2 g \sin \theta - T &= m_2 a \end{aligned}$$

Adding the equations, we obtain the acceleration:

$$a = \frac{m_2 g \sin \theta - f_k}{m_1 + m_2}$$

For  $f_k = \mu_k F_N = \mu_k m_1 g$ , we obtain

$$a = \frac{(3.0 \text{ kg})(9.8 \text{ m/s}^2) \sin 30^\circ - (0.25)(2.0 \text{ kg})(9.8 \text{ m/s}^2)}{3.0 \text{ kg} + 2.0 \text{ kg}} = 1.96 \text{ m/s}^2.$$

Returning this value to either of the above two equations, we find  $T = 8.8 \text{ N}$ .

65. (a) Using  $F = \mu_s mg$ , the coefficient of static friction for the surface between the two blocks is  $\mu_s = (12 \text{ N}) / (39.2 \text{ N}) = 0.31$ , where  $m_t g = (4.0 \text{ kg})(9.8 \text{ m/s}^2) = 39.2 \text{ N}$  is the weight of the top block. Let  $M = m_t + m_b = 9.0 \text{ kg}$  be the total *system* mass, then the maximum horizontal force has a magnitude  $Ma = M\mu_s g = 27 \text{ N}$ .

(b) The acceleration (in the maximal case) is  $a = \mu_s g = 3.0 \text{ m/s}^2$ .



66. With  $\theta = 40^\circ$ , we apply Newton's second law to the "downhill" direction:

$$mg \sin \theta - f = ma,$$

$$f = f_k = \mu_k F_N = \mu_k mg \cos \theta$$

using Eq. 6-12. Thus,

$$a = 0.75 \text{ m/s}^2 = g(\sin \theta - \mu_k \cos \theta)$$

determines the coefficient of kinetic friction:  $\mu_k = 0.74$ .

67. (a) To be “on the verge of sliding” means the applied force is equal to the maximum possible force of static friction (Eq. 6-1, with  $F_N = mg$  in this case):

$$f_{s,\max} = \mu_s mg = 35.3 \text{ N.}$$

(b) In this case, the applied force  $\vec{F}$  indirectly decreases the maximum possible value of friction (since its  $y$  component causes a reduction in the normal force) as well as directly opposing the friction force itself (because of its  $x$  component). The normal force turns out to be

$$F_N = mg - F \sin \theta$$

where  $\theta = 60^\circ$ , so that the horizontal equation (the  $x$  application of Newton’s second law) becomes

$$F \cos \theta - f_{s,\max} = F \cos \theta - \mu_s (mg - F \sin \theta) = 0 \quad \Rightarrow \quad F = 39.7 \text{ N.}$$


(c) Now, the applied force  $\vec{F}$  indirectly increases the maximum possible value of friction (since its  $y$  component causes a reduction in the normal force) as well as directly opposing the friction force itself (because of its  $x$  component). The normal force in this case turns out to be

$$F_N = mg + F \sin \theta,$$

where  $\theta = 60^\circ$ , so that the horizontal equation becomes

$$F \cos \theta - f_{s,\max} = F \cos \theta - \mu_s (mg + F \sin \theta) = 0 \quad \Rightarrow \quad F = 320 \text{ N.}$$

68. The free-body diagrams for the two boxes are shown below.  $T$  is the magnitude of the force in the rod (when  $T > 0$  the rod is said to be in tension and when  $T < 0$  the rod is under compression),  $\vec{F}_{N2}$  is the normal force on box 2 (the uncle box),  $\vec{F}_{N1}$  is the normal force on the aunt box (box 1),  $\vec{f}_1$  is kinetic friction force on the aunt box, and  $\vec{f}_2$  is kinetic friction force on the uncle box. Also,  $m_1 = 1.65 \text{ kg}$  is the mass of the aunt box and  $m_2 = 3.30 \text{ kg}$  is the mass of the uncle box (which is a lot of ants!).

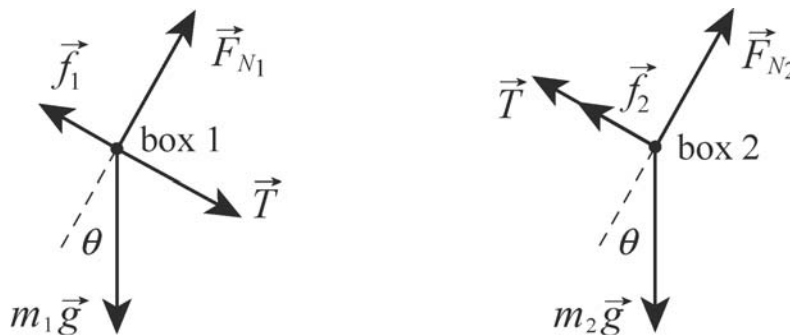

For each block we take  $+x$  downhill (which is toward the lower-right in these diagrams) and  $+y$  in the direction of the normal force. Applying Newton's second law to the  $x$  and  $y$  directions of first box 2 and next box 1, we arrive at four equations:

$$\begin{aligned} m_2 g \sin \theta - f_2 - T &= m_2 a \\ F_{N2} - m_2 g \cos \theta &= 0 \\ m_1 g \sin \theta - f_1 + T &= m_1 a \\ F_{N1} - m_1 g \cos \theta &= 0 \end{aligned}$$

which, when combined with Eq. 6-2 ( $f_1 = \mu_1 F_{N1}$  where  $\mu_1 = 0.226$  and  $f_2 = \mu_2 F_{N2}$  where  $\mu_2 = 0.113$ ), fully describe the dynamics of the system.

(a) We solve the above equations for the tension and obtain

$$T = \left( \frac{m_2 m_1 g}{m_2 + m_1} \right) (\mu_1 - \mu_2) \cos \theta = 1.05 \text{ N}.$$

(b) These equations lead to an acceleration equal to

$$a = g \left( \sin \theta - \left( \frac{\mu_2 m_2 + \mu_1 m_1}{m_2 + m_1} \right) \cos \theta \right) = 3.62 \text{ m/s}^2.$$

(c) Reversing the blocks is equivalent to switching the labels. We see from our algebraic result in part (a) that this gives a negative value for  $T$  (equal in magnitude to the result we got before). Thus, the situation is as it was before except that the rod is now in a state of compression.

69. Each side of the trough exerts a normal force on the crate. The first diagram shows the view looking in toward a cross section. The net force is along the dashed line. Since each of the normal forces makes an angle of  $45^\circ$  with the dashed line, the magnitude of the resultant normal force is given by

$$F_{Nr} = 2F_N \cos 45^\circ = \sqrt{2}F_N.$$

The second diagram is the free-body diagram for the crate (from a “side” view, similar to that shown in the first picture in Fig. 6-53). The force of gravity has magnitude  $mg$ , where  $m$  is the mass of the crate, and the magnitude of the force of friction is denoted by  $f$ . We take the  $+x$  direction to be down the incline and  $+y$  to be in the direction of  $\vec{F}_{Nr}$ . Then the  $x$  and the  $y$  components of Newton’s second law are

$$\begin{aligned} x: \quad & mg \sin \theta - f = ma \\ y: \quad & F_{Nr} - mg \cos \theta = 0. \end{aligned}$$



Since the crate is moving, each side of the trough exerts a force of kinetic friction, so the total frictional force has magnitude

$$f = 2\mu_k F_N = 2\mu_k F_{Nr} / \sqrt{2} = \sqrt{2}\mu_k F_{Nr}$$

Combining this expression with  $F_{Nr} = mg \cos \theta$  and substituting into the  $x$  component equation, we obtain

$$mg \sin \theta - \sqrt{2}mg \cos \theta = ma.$$

Therefore  $a = g(\sin \theta - \sqrt{2}\mu_k \cos \theta)$ .



70. (a) The coefficient of static friction is  $\mu_s = \tan(\theta_{\text{slip}}) = 0.577 \approx 0.58$ .

(b) Using

$$mg \sin \theta - f = ma$$

$$f = f_k = \mu_k F_N = \mu_k mg \cos \theta$$

and  $a = 2d/t^2$  (with  $d = 2.5$  m and  $t = 4.0$  s), we obtain  $\mu_k = 0.54$ .

71. We may treat all 25 cars as a single object of mass  $m = 25 \times 5.0 \times 10^4$  kg and (when the speed is 30 km/h = 8.3 m/s) subject to a friction force equal to

$$f = 25 \times 250 \times 8.3 = 5.2 \times 10^4 \text{ N.}$$

(a) Along the level track, this object experiences a “forward” force  $T$  exerted by the locomotive, so that Newton’s second law leads to


$$T - f = ma \Rightarrow T = 5.2 \times 10^4 + (1.25 \times 10^6)(0.20) = 3.0 \times 10^5 \text{ N.}$$

(b) The free-body diagram is shown next, with  $\theta$  as the angle of the incline. The  $+x$  direction (which is the only direction to which we will be applying Newton’s second law) is uphill (to the upper right in our sketch).

Thus, we obtain

$$T - f - mg \sin \theta = ma$$

where we set  $a = 0$  (implied by the problem statement) and solve for the angle. We obtain  $\theta = 1.2^\circ$ .

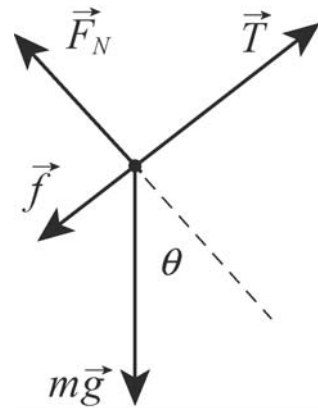

72. An excellent discussion and equation development related to this problem is given in Sample Problem 6-2. Using the result, we obtain

$$\theta = \tan^{-1} \mu_s = \tan^{-1} 0.50 = 27^\circ$$

which implies that the angle through which the slope should be *reduced* is

$$\phi = 45^\circ - 27^\circ \approx 20^\circ.$$

73. We make use of Eq. 6-16 which yields

$$\sqrt{\frac{2mg}{C_D \pi R^2}} = \sqrt{\frac{2(6)(9.8)}{(1.6)(1.2)\pi(0.03)^2}} = 147 \text{ m/s.}$$



74. (a) The upward force exerted by the car on the passenger is equal to the downward force of gravity ( $W = 500 \text{ N}$ ) on the passenger. So the *net* force does not have a vertical contribution; it only has the contribution from the horizontal force (which is necessary for maintaining the circular motion). Thus  $|\vec{F}_{\text{net}}| = F = 210 \text{ N}$ .

(b) Using Eq. 6-18, we have

$$v = \sqrt{\frac{FR}{m}} = \sqrt{\frac{(210 \text{ N})(470 \text{ m})}{51.0 \text{ kg}}} = 44.0 \text{ m/s}.$$

75. (a) We note that  $F_N = mg$  in this situation, so

$$f_{s,\max} = \mu_s mg = (0.52)(11 \text{ kg})(9.8 \text{ m/s}^2) = 56 \text{ N}.$$

Consequently, the horizontal force  $\vec{F}$  needed to initiate motion must be (at minimum) slightly more than 56 N.

(b) Analyzing vertical forces when  $\vec{F}$  is at nonzero  $\theta$  yields

$$F \sin \theta + F_N = mg \Rightarrow f_{s,\max} = \mu_s (mg - F \sin \theta).$$

Now, the horizontal component of  $\vec{F}$  needed to initiate motion must be (at minimum) slightly more than this, so

$$F \cos \theta = \mu_s (mg - F \sin \theta) \Rightarrow F = \frac{\mu_s mg}{\cos \theta + \mu_s \sin \theta}$$

which yields  $F = 59 \text{ N}$  when  $\theta = 60^\circ$ .

(c) We now set  $\theta = -60^\circ$  and obtain

$$F = \frac{(0.52)(11 \text{ kg})(9.8 \text{ m/s}^2)}{\cos(-60^\circ) + (0.52) \sin(-60^\circ)} = 1.1 \times 10^3 \text{ N}.$$

76. We use Eq. 6-14,  $D = \frac{1}{2} C \rho A v^2$ , where  $\rho$  is the air density,  $A$  is the cross-sectional area of the missile,  $v$  is the speed of the missile, and  $C$  is the drag coefficient. The area is given by  $A = \pi R^2$ , where  $R = 0.265$  m is the radius of the missile. Thus

$$D = \frac{1}{2} (0.75) (1.2 \text{ kg/m}^3) \pi (0.265 \text{ m})^2 (250 \text{ m/s})^2 = 6.2 \times 10^3 \text{ N}.$$

77. The magnitude of the acceleration of the cyclist as it moves along the horizontal circular path is given by  $v^2/R$ , where  $v$  is the speed of the cyclist and  $R$  is the radius of the curve.


(a) The horizontal component of Newton's second law is  $f = mv^2/R$ , where  $f$  is the static friction exerted horizontally by the ground on the tires. Thus,

$$f = \frac{(85.0 \text{ kg})(9.00 \text{ m/s})^2}{25.0 \text{ m}} = 275 \text{ N}.$$

(b) If  $F_N$  is the vertical force of the ground on the bicycle and  $m$  is the mass of the bicycle and rider, the vertical component of Newton's second law leads to  $F_N = mg = 833 \text{ N}$ . The magnitude of the force exerted by the ground on the bicycle is therefore

$$\sqrt{f^2 + F_N^2} = \sqrt{(275 \text{ N})^2 + (833 \text{ N})^2} = 877 \text{ N}.$$

78. The free-body diagram for the puck is shown below.  $\vec{F}_N$  is the normal force of the ice on the puck,  $\vec{f}$  is the force of friction (in the  $-x$  direction), and  $m\vec{g}$  is the force of gravity.

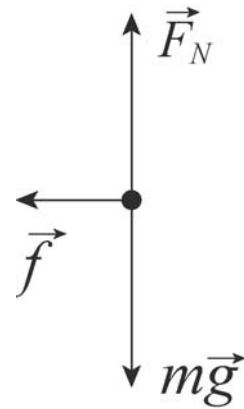

(a) The horizontal component of Newton's second law gives  $-f = ma$ , and constant acceleration kinematics (Table 2-1) can be used to find the acceleration.


Since the final velocity is zero,  $v^2 = v_0^2 + 2ax$  leads to  $a = -v_0^2 / 2x$ . This is substituted into the Newton's law equation to obtain

$$f = \frac{mv_0^2}{2x} = \frac{(0.110 \text{ kg})(6.0 \text{ m/s})^2}{2(15 \text{ m})} = 0.13 \text{ N}.$$

(b) The vertical component of Newton's second law gives  $F_N - mg = 0$ , so  $F_N = mg$  which implies (using Eq. 6-2)  $f = \mu_k mg$ . We solve for the coefficient:

$$\mu_k = \frac{f}{mg} = \frac{0.13 \text{ N}}{(0.110 \text{ kg})(9.8 \text{ m/s}^2)} = 0.12 .$$

79. (a) The free-body diagram for the person (shown as an L-shaped block) is shown below. The force that she exerts on the rock slabs is not directly shown (since the diagram should only show forces exerted on her), but it is related by Newton's third law to the normal forces  $\vec{F}_{N1}$  and  $\vec{F}_{N2}$  exerted horizontally by the slabs onto her shoes and back, respectively. We will show in part (b) that  $F_{N1} = F_{N2}$  so that there is no ambiguity in saying that the magnitude of her push is  $F_{N2}$ . The total upward force due to (maximum) static friction is  $\vec{f} = \vec{f}_1 + \vec{f}_2$  where  $f_1 = \mu_{s1}F_{N1}$  and  $f_2 = \mu_{s2}F_{N2}$ . The problem gives the values  $\mu_{s1} = 1.2$  and  $\mu_{s2} = 0.8$ .

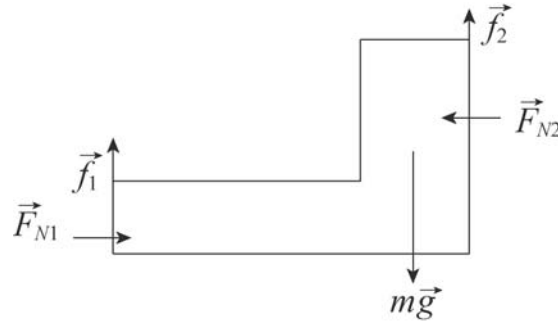

(b) We apply Newton's second law to the  $x$  and  $y$  axes (with  $+x$  rightward and  $+y$  upward and there is no acceleration in either direction).

$$\begin{aligned} F_{N1} - F_{N2} &= 0 \\ f_1 + f_2 - mg &= 0 \end{aligned}$$

The first equation tells us that the normal forces are equal  $F_{N1} = F_{N2} = F_N$ . Consequently, from Eq. 6-1,

$$\begin{aligned} f_1 &= \mu_{s1}F_N \\ f_2 &= \mu_{s2}F_N \end{aligned}$$

we conclude that

$$f_1 = \left( \frac{\mu_{s1}}{\mu_{s2}} \right) f_2.$$

Therefore,  $f_1 + f_2 - mg = 0$  leads to

$$\left( \frac{\mu_{s1}}{\mu_{s2}} + 1 \right) f_2 = mg$$

which (with  $m = 49$  kg) yields  $f_2 = 192$  N. From this we find  $F_N = f_2 / \mu_{s2} = 240$  N. This is equal to the magnitude of the push exerted by the rock climber.


(c) From the above calculation, we find  $f_1 = \mu_{s1}F_N = 288$  N which amounts to a fraction

$$\frac{f_1}{W} = \frac{288}{(49)(9.8)} = 0.60$$

or 60% of her weight.

80. The free-body diagram for the stone is shown on the right, with  $\vec{F}$  being the force applied to the stone,  $\vec{F}_N$  the *downward* normal force of the ceiling on the stone,  $m\vec{g}$  the force of gravity, and  $\vec{f}$  the force of friction. We take the  $+x$  direction to be horizontal to the right and the  $+y$  direction to be up. The equations for the  $x$  and the  $y$  components of the force according to Newton's second law are:

$$\begin{aligned} F_x &= F \cos \theta - f = ma \\ F_y &= F \sin \theta - F_N - mg = 0 \end{aligned}$$

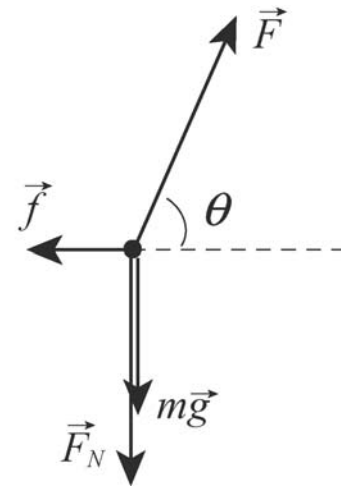

Now  $f = \mu_k F_N$ , and the second equation gives  $F_N = F \sin \theta - mg$ , which yields  $f = \mu_k (F \sin \theta - mg)$ . This expression is substituted for  $f$  in the first equation to obtain

$$F \cos \theta - \mu_k (F \sin \theta - mg) = ma.$$

For  $a = 0$ , the force is

$$F = \frac{-\mu_k mg}{\cos \theta - \mu_k \sin \theta}.$$

With  $\mu_k = 0.65$ ,  $m = 5.0$  kg, and  $\theta = 70^\circ$ , we obtain  $F = 118$  N.

81. (a) If we choose “downhill” positive, then Newton’s law gives

$$m_A g \sin \theta - f_A - T = m_A a$$

for block  $A$  (where  $\theta = 30^\circ$ ). For block  $B$  we choose leftward as the positive direction and write  $T - f_B = m_B a$ . Now

$$f_A = \mu_{k,\text{incline}} F_{NA} = \mu' m_A g \cos \theta$$

using Eq. 6-12 applies to block  $A$ , and

$$f_B = \mu_k F_{NB} = \mu_k m_B g.$$

In this particular problem, we are asked to set  $\mu' = 0$ , and the resulting equations can be straightforwardly solved for the tension:  $T = 13 \text{ N}$ .

(b) Similarly, finding the value of  $a$  is straightforward:

$$a = g(m_A \sin \theta - \mu_k m_B) / (m_A + m_B) = 1.6 \text{ m/s}^2.$$



82. (a) If the skier covers a distance  $L$  during time  $t$  with zero initial speed and a constant acceleration  $a$ , then  $L = at^2/2$ , which gives the acceleration  $a_1$  for the first (old) pair of skis:

$$a_1 = \frac{2L}{t_1^2} = \frac{2(200\text{ m})}{(61\text{ s})^2} = 0.11\text{ m/s}^2.$$

(b) The acceleration  $a_2$  for the second (new) pair is

$$a_2 = \frac{2L}{t_2^2} = \frac{2(200\text{ m})}{(42\text{ s})^2} = 0.23\text{ m/s}^2.$$

(c) The net force along the slope acting on the skier of mass  $m$  is

$$F_{\text{net}} = mg \sin \theta - f_k = mg(\sin \theta - \mu_k \cos \theta) = ma$$

which we solve for  $\mu_{k1}$  for the first pair of skis:

$$\mu_{k1} = \tan \theta - \frac{a_1}{g \cos \theta} = \tan 3.0^\circ - \frac{0.11\text{ m/s}^2}{(9.8\text{ m/s}^2) \cos 3.0^\circ} = 0.041$$

(d) For the second pair, we have

$$\mu_{k2} = \tan \theta - \frac{a_2}{g \cos \theta} = \tan 3.0^\circ - \frac{0.23\text{ m/s}^2}{(9.8\text{ m/s}^2) \cos 3.0^\circ} = 0.029.$$

83. If we choose “downhill” positive, then Newton’s law gives

$$m g \sin \theta - f_k = m a$$

for the sliding child. Now using Eq. 6-12

$$f_k = \mu_k F_N = \mu_k m g,$$

so we obtain  $a = g(\sin \theta - \mu_k \cos \theta) = -0.5 \text{ m/s}^2$  (note that the problem gives the direction of the acceleration vector as uphill, even though the child is sliding downhill, so it is a deceleration). With  $\theta = 35^\circ$ , we solve for the coefficient and find  $\mu_k = 0.76$ .

84. At the top of the hill the vertical forces on the car are the upward normal force exerted by the ground and the downward pull of gravity. Designating  $+y$  downward, we have

$$mg - F_N = \frac{mv^2}{R}$$

from Newton's second law. To find the greatest speed without leaving the hill, we set  $F_N = 0$  and solve for  $v$ :

$$v = \sqrt{gR} = \sqrt{(9.8 \text{ m/s}^2)(250 \text{ m})} = 49.5 \text{ m/s} = 49.5(3600/1000) \text{ km/h} = 178 \text{ km/h}.$$

85. The mass of the car is  $m = (10700/9.80) \text{ kg} = 1.09 \times 10^3 \text{ kg}$ . We choose “inward” (horizontally towards the center of the circular path) as the positive direction.

(a) With  $v = 13.4 \text{ m/s}$  and  $R = 61 \text{ m}$ , Newton’s second law (using Eq. 6-18) leads to

$$f_s = \frac{mv^2}{R} = 3.21 \times 10^3 \text{ N} .$$

(b) Noting that  $F_N = mg$  in this situation, the maximum possible static friction is found to be

$$f_{s,\max} = \mu_s mg = (0.35)(10700 \text{ N}) = 3.75 \times 10^3 \text{ N}$$

using Eq. 6-1. We see that the static friction found in part (a) is less than this, so the car rolls (no skidding) and successfully negotiates the curve.

86. (a) Our  $+x$  direction is horizontal and is chosen (as we also do with  $+y$ ) so that the components of the 100 N force  $\vec{F}$  are non-negative. Thus,  $F_x = F \cos \theta = 100$  N, which the textbook denotes  $F_h$  in this problem.

(b) Since there is no vertical acceleration, application of Newton's second law in the  $y$  direction gives

$$F_N + F_y = mg \Rightarrow F_N = mg - F \sin \theta$$

where  $m = 25.0$  kg. This yields  $F_N = 245$  N in this case ( $\theta = 0^\circ$ ).

(c) Now,  $F_x = F_h = F \cos \theta = 86.6$  N for  $\theta = 30.0^\circ$ .

(d) And  $F_N = mg - F \sin \theta = 195$  N.

(e) We find  $F_x = F_h = F \cos \theta = 50.0$  N for  $\theta = 60.0^\circ$ .

(f) And  $F_N = mg - F \sin \theta = 158$  N.

(g) The condition for the chair to slide is

$$F_x > f_{s,\max} = \mu_s F_N \text{ where } \mu_s = 0.42.$$

For  $\theta = 0^\circ$ , we have

$$F_x = 100 \text{ N} < f_{s,\max} = (0.42)(245 \text{ N}) = 103 \text{ N}$$

so the crate remains at rest.

(h) For  $\theta = 30.0^\circ$ , we find

$$F_x = 86.6 \text{ N} > f_{s,\max} = (0.42)(195 \text{ N}) = 81.9 \text{ N}$$

so the crate slides.

(i) For  $\theta = 60^\circ$ , we get

$$F_x = 50.0 \text{ N} < f_{s,\max} = (0.42)(158 \text{ N}) = 66.4 \text{ N}$$

which means the crate must remain at rest.

87. For simplicity, we denote the  $70^\circ$  angle as  $\theta$  and the magnitude of the push (80 N) as  $P$ . The vertical forces on the block are the downward normal force exerted on it by the ceiling, the downward pull of gravity (of magnitude  $mg$ ) and the vertical component of  $\vec{P}$  (which is upward with magnitude  $P \sin \theta$ ). Since there is no acceleration in the vertical direction, we must have

$$F_N = P \sin \theta - mg$$

in which case the leftward-pointed kinetic friction has magnitude

$$f_k = \mu_k (P \sin \theta - mg).$$

Choosing  $+x$  rightward, Newton's second law leads to

$$P \cos \theta - f_k = ma \Rightarrow a = \frac{P \cos \theta - \mu_k (P \sin \theta - mg)}{m}$$

which yields  $a = 3.4 \text{ m/s}^2$  when  $\mu_k = 0.40$  and  $m = 5.0 \text{ kg}$ .

88. (a) The intuitive conclusion, that the tension is greatest at the bottom of the swing, is certainly supported by application of Newton's second law there:

$$T - mg = \frac{mv^2}{R} \Rightarrow T = m \left( g + \frac{v^2}{R} \right)$$

where Eq. 6-18 has been used. Increasing the speed eventually leads to the tension at the bottom of the circle reaching that breaking value of 40 N.

(b) Solving the above equation for the speed, we find

$$v = \sqrt{R \left( \frac{T}{m} - g \right)} = \sqrt{(0.91 \text{ m}) \left( \frac{40 \text{ N}}{0.37 \text{ kg}} - 9.8 \text{ m/s}^2 \right)}$$

which yields  $v = 9.5 \text{ m/s}$ .

89. (a) The push (to get it moving) must be at least as big as  $f_{s,\max} = \mu_s F_N$  (Eq. 6-1, with  $F_N = mg$  in this case), which equals  $(0.51)(165 \text{ N}) = 84.2 \text{ N}$ .


(b) While in motion, constant velocity (zero acceleration) is maintained if the push is equal to the kinetic friction force  $f_k = \mu_k F_N = \mu_k mg = 52.8 \text{ N}$ .

(c) We note that the mass of the crate is  $165/9.8 = 16.8 \text{ kg}$ . The acceleration, using the push from part (a), is

$$a = (84.2 \text{ N} - 52.8 \text{ N}) / (16.8 \text{ kg}) \approx 1.87 \text{ m/s}^2.$$



90. In the figure below,  $m = 140/9.8 = 14.3$  kg is the mass of the child. We use  $\vec{w}_x$  and  $\vec{w}_y$  as the components of the gravitational pull of Earth on the block; their magnitudes are  $w_x = mg \sin \theta$  and  $w_y = mg \cos \theta$ .

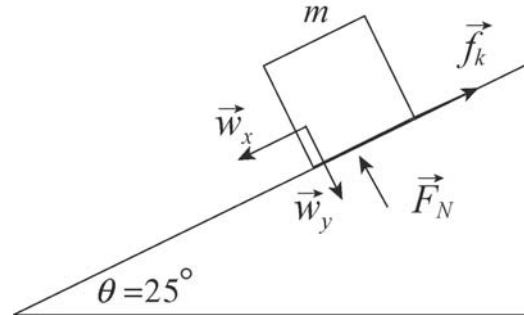

(a) With the  $x$  axis directed up along the incline (so that  $a = -0.86$  m/s<sup>2</sup>), Newton's second law leads to

$$f_k - 140 \sin 25^\circ = m(-0.86)$$

which yields  $f_k = 47$  N. We also apply Newton's second law to the  $y$  axis (perpendicular to the incline surface), where the acceleration-component is zero:

$$F_N - 140 \cos 25^\circ = 0 \Rightarrow F_N = 127 \text{ N.}$$

Therefore,  $\mu_k = f_k/F_N = 0.37$ .

(b) Returning to our first equation in part (a), we see that if the downhill component of the weight force were insufficient to overcome static friction, the child would not slide at all. Therefore, we require  $140 \sin 25^\circ > f_{s,\max} = \mu_s F_N$ , which leads to  $\tan 25^\circ = 0.47 > \mu_s$ . The minimum value of  $\mu_s$  equals  $\mu_k$  and is more subtle; reference to §6-1 is recommended. If  $\mu_k$  exceeded  $\mu_s$  then when static friction were overcome (as the incline is raised) then it should start to move – which is impossible if  $f_k$  is large enough to cause deceleration! The bounds on  $\mu_s$  are therefore given by  $0.47 > \mu_s > 0.37$ .

91. We apply Newton's second law (as  $F_{\text{push}} - f = ma$ ). If we find  $F_{\text{push}} < f_{\text{max}}$ , we conclude "no, the cabinet does not move" (which means  $a$  is actually 0 and  $f = F_{\text{push}}$ ), and if we obtain  $a > 0$  then it moves (so  $f = f_k$ ). For  $f_{\text{max}}$  and  $f_k$  we use Eq. 6-1 and Eq. 6-2 (respectively), and in those formulas we set the magnitude of the normal force equal to 556 N. Thus,  $f_{\text{max}} = 378$  N and  $f_k = 311$  N.

(a) Here we find  $F_{\text{push}} < f_{\text{max}}$  which leads to  $f = F_{\text{push}} = 222$  N.

(b) Again we find  $F_{\text{push}} < f_{\text{max}}$  which leads to  $f = F_{\text{push}} = 334$  N.

(c) Now we have  $F_{\text{push}} > f_{\text{max}}$  which means it moves and  $f = f_k = 311$  N.

(d) Again we have  $F_{\text{push}} > f_{\text{max}}$  which means it moves and  $f = f_k = 311$  N.

(e) The cabinet moves in (c) and (d).

92. (a) The tension will be the greatest at the lowest point of the swing. Note that there is no substantive difference between the tension  $T$  in this problem and the normal force  $F_N$  in Sample Problem 6-7. Eq. 6-19 of that Sample Problem examines the situation at the top of the circular path (where  $F_N$  is the least), and rewriting that for the bottom of the path leads to

$$T = mg + mv^2/r$$

where  $F_N$  is at its greatest value.

(b) At the breaking point  $T = 33 \text{ N} = m(g + v^2/r)$  where  $m = 0.26 \text{ kg}$  and  $r = 0.65 \text{ m}$ . Solving for the speed, we find that the cord should break when the speed (at the lowest point) reaches  $8.73 \text{ m/s}$ .

93. (a) The component of the weight along the incline (with downhill understood as the positive direction) is  $mg \sin \theta$  where  $m = 630 \text{ kg}$  and  $\theta = 10.2^\circ$ . With  $f = 62.0 \text{ N}$ , Newton's second law leads to

$$mg \sin \theta - f = ma$$

which yields  $a = 1.64 \text{ m/s}^2$ . Using Eq. 2-15, we have

$$80.0 \text{ m} = \left( 6.20 \frac{\text{m}}{\text{s}} \right) t + \frac{1}{2} \left( 1.64 \frac{\text{m}}{\text{s}^2} \right) t^2 .$$

This is solved using the quadratic formula. The positive root is  $t = 6.80 \text{ s}$ .

(b) Running through the calculation of part (a) with  $f = 42.0 \text{ N}$  instead of  $f = 62 \text{ N}$  results in  $t = 6.76 \text{ s}$ .

94. (a) The  $x$  component of  $\vec{F}$  tries to move the crate while its  $y$  component indirectly contributes to the inhibiting effects of friction (by increasing the normal force). Newton's second law implies

$$x \text{ direction: } F \cos \theta - f_s = 0$$

$$y \text{ direction: } F_N - F \sin \theta - mg = 0.$$


To be "on the verge of sliding" means  $f_s = f_{s,\max} = \mu_s F_N$  (Eq. 6-1). Solving these equations for  $F$  (actually, for the ratio of  $F$  to  $mg$ ) yields

$$\frac{F}{mg} = \frac{\mu_s}{\cos \theta - \mu_s \sin \theta}.$$

This is plotted on the right ( $\theta$  in degrees).

(b) The denominator of our expression (for  $F/mg$ ) vanishes when

$$\cos \theta - \mu_s \sin \theta = 0 \Rightarrow \theta_{\text{inf}} = \tan^{-1} \left( \frac{1}{\mu_s} \right)$$

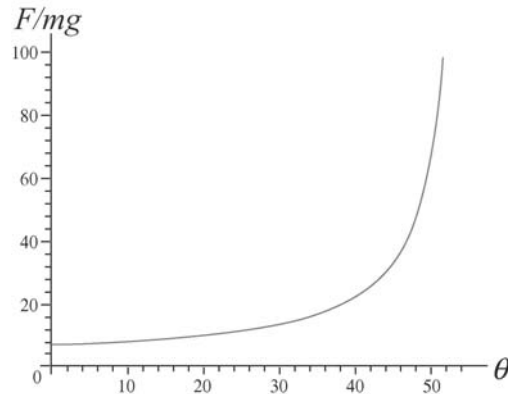

For  $\mu_s = 0.70$ , we obtain  $\theta_{\text{inf}} = \tan^{-1} \left( \frac{1}{\mu_s} \right) = 55^\circ$ .

(c) Reducing the coefficient means increasing the angle by the condition in part (b).

(d) For  $\mu_s = 0.60$  we have  $\theta_{\text{inf}} = \tan^{-1} \left( \frac{1}{\mu_s} \right) = 59^\circ$ .

95. The car is in “danger of sliding” down when

$$\mu_s = \tan \theta = \tan 35.0^\circ = 0.700.$$

This value represents a 3.4% decrease from the given 0.725 value.

96. For the  $m_2 = 1.0$  kg block, application of Newton's laws result in

$$\begin{aligned} F \cos \theta - T - f_k &= m_2 a & x \text{ axis} \\ F_N - F \sin \theta - m_2 g &= 0 & y \text{ axis} \end{aligned}$$

Since  $f_k = \mu_k F_N$ , these equations can be combined into an equation to solve for  $a$ :

$$F(\cos \theta - \mu_k \sin \theta) - T - \mu_k m_2 g = m_2 a$$

Similarly (but without the applied push) we analyze the  $m_1 = 2.0$  kg block:

$$\begin{aligned} T - f'_k &= m_1 a & x \text{ axis} \\ F'_N - m_1 g &= 0 & y \text{ axis} \end{aligned}$$

Using  $f'_k = \mu_k F'_N$ , the equations can be combined:

$$T - \mu_k m_1 g = m_1 a$$

Subtracting the two equations for  $a$  and solving for the tension, we obtain

$$T = \frac{m_1(\cos \theta - \mu_k \sin \theta)}{m_1 + m_2} F = \frac{(2.0 \text{ kg})[\cos 35^\circ - (0.20) \sin 35^\circ]}{2.0 \text{ kg} + 1.0 \text{ kg}} (20 \text{ N}) = 9.4 \text{ N}.$$

97. (a) The  $x$  component of  $\vec{F}$  contributes to the motion of the crate while its  $y$  component indirectly contributes to the inhibiting effects of friction (by increasing the normal force). Along the  $y$  direction, we have  $F_N - F\cos\theta - mg = 0$  and along the  $x$  direction we have  $F\sin\theta - f_k = 0$  (since it is not accelerating, according to the problem). Also, Eq. 6-2 gives  $f_k = \mu_k F_N$ . Solving these equations for  $F$  yields

$$F = \frac{\mu_k mg}{\sin\theta - \mu_k \cos\theta} .$$

(b) When  $\theta < \theta_0 = \tan^{-1} \mu_s$ ,  $F$  will not be able to move the mop head.



98. Consider that the car is “on the verge of sliding out” – meaning that the force of static friction is acting “down the bank” (or “downhill” from the point of view of an ant on the banked curve) with maximum possible magnitude. We first consider the vector sum  $\vec{F}$  of the (maximum) static friction force and the normal force. Due to the facts that they are perpendicular and their magnitudes are simply proportional (Eq. 6-1), we find  $\vec{F}$  is at angle (measured from the vertical axis)  $\phi = \theta + \theta_s$  where  $\tan \theta_s = \mu_s$  (compare with Eq. 6-13), and  $\theta$  is the bank angle. Now, the vector sum of  $\vec{F}$  and the vertically downward pull ( $mg$ ) of gravity must be equal to the (horizontal) centripetal force ( $mv^2/R$ ), which leads to a surprisingly simple relationship:

$$\tan \phi = \frac{mv^2/R}{mg} = \frac{v^2}{Rg}.$$

Writing this as an expression for the maximum speed, we have

$$v_{\max} = \sqrt{Rg \tan(\theta + \tan^{-1} \mu_s)} = \sqrt{\frac{Rg(\tan \theta + \mu_s)}{1 - \mu_s \tan \theta}}.$$

(a) We note that the given speed is (in SI units) roughly 17 m/s. If we do not want the cars to “depend” on the static friction to keep from sliding out (that is, if we want the component “down the back” of gravity to be sufficient), then we can set  $\mu_s = 0$  in the above expression and obtain  $v = \sqrt{Rg \tan \theta}$ . With  $R = 150$  m, this leads to  $\theta = 11^\circ$ .

(b) If, however, the curve is not banked (so  $\theta = 0$ ) then the above expression becomes

$$v = \sqrt{Rg \tan(\tan^{-1} \mu_s)} = \sqrt{Rg \mu_s}$$

Solving this for the coefficient of static friction  $\mu_s = 0.19$ .

99. Replace  $f_s$  with  $f_k$  in Fig. 6-5(b) to produce the appropriate force diagram for the first part of this problem (when it is sliding downhill with zero acceleration). This amounts to replacing the static coefficient with the kinetic coefficient in Eq. 6-13:  $\mu_k = \tan\theta$ . Now (for the second part of the problem, with the block projected uphill) the friction direction is reversed from what is shown in Fig. 6-5(b). Newton's second law for the uphill motion (and Eq. 6-12) leads to

$$-mg \sin\theta - \mu_k mg \cos\theta = ma.$$

Canceling the mass and substituting what we found earlier for the coefficient, we have

$$-g \sin\theta - \tan\theta g \cos\theta = a.$$

This simplifies to  $-2g \sin\theta = a$ . Eq. 2-16 then gives the distance to stop:  $\Delta x = -v_o^2/2a$ .

(a) Thus, the distance up the incline traveled by the block is  $\Delta x = v_o^2/(4g \sin\theta)$ .

(b) We usually expect  $\mu_s > \mu_k$  (see the discussion in section 6-1). Sample Problem 6-2 treats the "angle of repose" (the minimum angle necessary for a stationary block to start sliding downhill):  $\mu_s = \tan(\theta_{\text{repose}})$ . Therefore, we expect  $\theta_{\text{repose}} > \theta$  found in part (a). Consequently, when the block comes to rest, the incline is not steep enough to cause it to start slipping down the incline again.

100. Analysis of forces in the horizontal direction (where there can be no acceleration) leads to the conclusion that  $F = F_N$ ; the magnitude of the normal force is 60 N. The maximum possible static friction force is therefore  $\mu_s F_N = 33$  N, and the kinetic friction force (when applicable) is  $\mu_k F_N = 23$  N.

(a) In this case,  $\vec{P} = 34$  N upward. Assuming  $\vec{f}$  points down, then Newton's second law for the  $y$  leads to

$$P - mg - f = ma.$$

if we assume  $f = f_s$  and  $a = 0$ , we obtain  $f = (34 - 22)$  N = 12 N. This is less than  $f_{s, \max}$ , which shows the consistency of our assumption. The answer is:  $\vec{f}_s = 12$  N down.

(b) In this case,  $\vec{P} = 12$  N upward. The above equation, with the same assumptions as in part (a), leads to  $f = (12 - 22)$  N = -10 N. Thus,  $|f_s| < f_{s, \max}$ , justifying our assumption that the block is stationary, but its negative value tells us that our initial assumption about the direction of  $\vec{f}$  is incorrect in this case. Thus, the answer is:  $\vec{f}_s = 10$  N up.

(c) In this case,  $\vec{P} = 48$  N upward. The above equation, with the same assumptions as in part (a), leads to  $f = (48 - 22)$  N = 26 N. Thus, we again have  $f_s < f_{s, \max}$ , and our answer is:  $\vec{f}_s = 26$  N down.

(d) In this case,  $\vec{P} = 62$  N upward. The above equation, with the same assumptions as in part (a), leads to  $f = (62 - 22)$  N = 40 N, which is larger than  $f_{s, \max}$ , -- invalidating our assumptions. Therefore, we take  $f = f_k$  and  $a \neq 0$  in the above equation; if we wished to find the value of  $a$  we would find it to be positive, as we should expect. The answer is:  $\vec{f}_k = 23$  N down.

(e) In this case,  $\vec{P} = 10$  N downward. The above equation (but with  $P$  replaced with  $-P$ ) with the same assumptions as in part (a), leads to  $f = (-10 - 22)$  N = -32 N. Thus, we have  $|f_s| < f_{s, \max}$ , justifying our assumption that the block is stationary, but its negative value tells us that our initial assumption about the direction of  $\vec{f}$  is incorrect in this case. Thus, the answer is:  $\vec{f}_s = 32$  N up.

(f) In this case,  $\vec{P} = 18$  N downward. The above equation (but with  $P$  replaced with  $-P$ ) with the same assumptions as in part (a), leads to  $f = (-18 - 22)$  N = -40 N, which is larger (in absolute value) than  $f_{s, \max}$ , -- invalidating our assumptions. Therefore, we take  $f = f_k$  and  $a \neq 0$  in the above equation; if we wished to find the value of  $a$  we would find it to be negative, as we should expect. The answer is:  $\vec{f}_k = 23$  N up.

(g) The block moves up the wall in case (d) where  $a > 0$ .

(h) The block moves down the wall in case (f) where  $a < 0$ .

(i) The frictional force  $\vec{f}_s$  is directed down in cases (a), (c) and (d).

101. (a) The distance traveled by the coin in 3.14 s is  $3(2\pi r) = 6\pi(0.050) = 0.94$  m. Thus, its speed is  $v = 0.94/3.14 = 0.30$  m/s.

(b) The centripetal acceleration is given by Eq. 6-17:

$$a = \frac{v^2}{r} = \frac{(0.30 \text{ m/s})^2}{0.050 \text{ m}} = 1.8 \text{ m/s}^2 .$$

(c) The acceleration vector (at any instant) is horizontal and points from the coin towards the center of the turntable.

(d) The only horizontal force acting on the coin is static friction  $f_s$  and must be large enough to supply the acceleration of part (b) for the  $m = 0.0020$  kg coin. Using Newton's second law,

$$f_s = ma = (0.0020 \text{ kg})(1.8 \text{ m/s}^2) = 3.6 \times 10^{-3} \text{ N} .$$

(e) The static friction  $f_s$  must point in the same direction as the acceleration (towards the center of the turntable).

(f) We note that the normal force exerted upward on the coin by the turntable must equal the coin's weight (since there is no vertical acceleration in the problem). We also note that if we repeat the computations in parts (a) and (b) for  $r' = 0.10$  m, then we obtain  $v' = 0.60$  m/s and  $a' = 3.6 \text{ m/s}^2$ . Now, if friction is at its maximum at  $r = r'$ , then, by Eq. 6-1, we obtain

$$\mu_s = \frac{f_{s,\max}}{mg} = \frac{ma'}{mg} = 0.37 .$$

102. (a) The distance traveled in one revolution is  $2\pi R = 2\pi(4.6 \text{ m}) = 29 \text{ m}$ . The (constant) speed is consequently  $v = (29 \text{ m})/(30 \text{ s}) = 0.96 \text{ m/s}$ .

(b) Newton's second law (using Eq. 6-17 for the magnitude of the acceleration) leads to

$$f_s = m \left( \frac{v^2}{R} \right) = m(0.20)$$

in SI units. Noting that  $F_N = mg$  in this situation, the maximum possible static friction is  $f_{s,\max} = \mu_s mg$  using Eq. 6-1. Equating this with  $f_s = m(0.20)$  we find the mass  $m$  cancels and we obtain  $\mu_s = 0.20/9.8 = 0.021$ .

103. (a) The box doesn't move until  $t = 2.8$  s, which is when the applied force  $\vec{F}$  reaches a magnitude of  $F = (1.8)(2.8) = 5.0$  N, implying therefore that  $f_{s, \max} = 5.0$  N. Analysis of the vertical forces on the block leads to the observation that the normal force magnitude equals the weight  $F_N = mg = 15$  N. Thus,  $\mu_s = f_{s, \max}/F_N = 0.34$ .

(b) We apply Newton's second law to the horizontal  $x$  axis (positive in the direction of motion):

$$F - f_k = ma \Rightarrow 1.8t - f_k = (1.5)(1.2t - 2.4)$$

Thus, we find  $f_k = 3.6$  N. Therefore,  $\mu_k = f_k / F_N = 0.24$ .

104. We note that  $F_N = mg$  in this situation, so  $f_k = \mu_k mg = (0.32) (220 \text{ N}) = 70.4 \text{ N}$  and  $f_{s,\max} = \mu_s mg = (0.41) (220 \text{ N}) = 90.2 \text{ N}$ .

(a) The person needs to push at least as hard as the static friction maximum if he hopes to start it moving. Denoting his force as  $P$ , this means a value of  $P$  slightly larger than 90.2 N is sufficient. Rounding to two figures, we obtain  $P = 90 \text{ N}$ .

(b) Constant velocity (zero acceleration) implies the push equals the kinetic friction, so  $P = 70 \text{ N}$ .

(c) Applying Newton's second law, we have

$$P - f_k = ma \Rightarrow a = \frac{\mu_s mg - \mu_k mg}{m}$$

which simplifies to  $a = g(\mu_s - \mu_k) = 0.88 \text{ m/s}^2$ .

105. Probably the most appropriate picture in the textbook to represent the situation in this problem is in the previous chapter: Fig. 5-9. We adopt the familiar axes with  $+x$  rightward and  $+y$  upward, and refer to the 85 N horizontal push of the worker as  $P$  (and assume it to be rightward). Applying Newton's second law to the  $x$  axis and  $y$  axis, respectively, produces

$$P - f_k = ma$$

$$F_N - mg = 0.$$

Using  $v^2 = v_0^2 + 2a\Delta x$  we find  $a = 0.36 \text{ m/s}^2$ . Consequently, we obtain  $f_k = 71 \text{ N}$  and  $F_N = 392 \text{ N}$ . Therefore,  $\mu_k = f_k / F_N = 0.18$ .



106. (a) The centripetal force is given by Eq. 6-18:

$$F = \frac{mv^2}{R} = \frac{(1.00 \text{ kg})(465 \text{ m/s})^2}{6.40 \times 10^6 \text{ m}} = 0.0338 \text{ N}.$$

(b) Calling downward (towards the center of Earth) the positive direction, Newton's second law leads to

$$mg - T = ma$$

where  $mg = 9.80 \text{ N}$  and  $ma = 0.034 \text{ N}$ , calculated in part (a). Thus, the tension in the cord by which the body hangs from the balance is  $T = 9.80 \text{ N} - 0.03 \text{ N} = 9.77 \text{ N}$ . Thus, this is the reading for a standard kilogram mass, of the scale at the equator of the spinning Earth.

107. Except for replacing  $f_s$  with  $f_k$ , Fig 6-5 in the textbook is appropriate. With that figure in mind, we choose uphill as the  $+x$  direction. Applying Newton's second law to the  $x$  axis, we have

$$f_k - W \sin \theta = ma \quad \text{where} \quad m = \frac{W}{g},$$

and where  $W = 40 \text{ N}$ ,  $a = +0.80 \text{ m/s}^2$  and  $\theta = 25^\circ$ . Thus, we find  $f_k = 20 \text{ N}$ . Along the  $y$  axis, we have

$$\sum \vec{F}_y = 0 \Rightarrow F_N = W \cos \theta$$

so that  $\mu_k = f_k / F_N = 0.56$ .

108. The assumption that there is no slippage indicates that we are dealing with static friction  $f_s$ , and it is this force that is responsible for "pushing" the luggage along as the belt moves. Thus, Fig. 6-5 in the textbook is appropriate for this problem -- *if* one reverses the arrow indicating the direction of motion (and removes the word "impending"). The mass of the box is  $m = 69/9.8 = 7.0$  kg. Applying Newton's law to the  $x$  axis leads to

$$f_s - mg \sin \theta = ma$$

where  $\theta = 2.5^\circ$  and uphill is the positive direction.

(a) Interpreting "temporarily at rest" (which is not meant to be the same thing as "momentarily at rest") to mean that the box is at equilibrium, we have  $a = 0$  and, consequently,  $f_s = mg \sin \theta = 3.0$  N. It is positive and therefore pointed uphill.

(b) Constant speed in a one-dimensional setting implies that the velocity is constant -- thus,  $a = 0$  again. We recover the answer  $f_s = 3.0$  N uphill, which we obtained in part (a).

(c) Early in the problem, the direction of motion of the luggage was given: downhill. Thus, an increase in that speed indicates a downhill acceleration  $a = -0.20$  m/s<sup>2</sup>. We now solve for the friction and obtain

$$f_s = ma + mg \sin \theta = 1.6 \text{ N},$$

which is positive -- therefore, uphill.

(d) A decrease in the (downhill) speed indicates the acceleration vector points uphill; thus,  $a = +0.20$  m/s<sup>2</sup>. We solve for the friction and obtain

$$f_s = ma + mg \sin \theta = 4.4 \text{ N},$$

which is positive -- therefore, uphill.

(e) The situation is similar to the one described in part (c), but with  $a = -0.57$  m/s<sup>2</sup>. Now,


$$f_s = ma + mg \sin \theta = -1.0 \text{ N},$$

or  $|f_s| = 1.0$  N. Since  $f_s$  is negative, the direction is downhill.

(f) From the above, the only case where  $f_s$  is directed downhill is (e).

109. We resolve this horizontal force into appropriate components.

(a) Applying Newton's second law to the  $x$  (directed uphill) and  $y$  (directed away from the incline surface) axes, we obtain

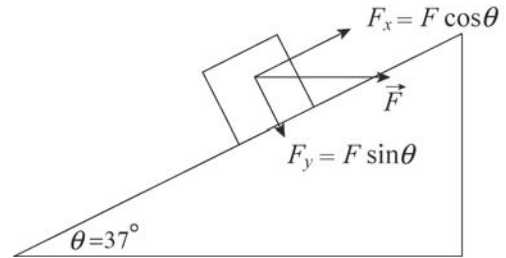

$$F \cos \theta - f_k - mg \sin \theta = ma$$

$$F_N - F \sin \theta - mg \cos \theta = 0.$$

Using  $f_k = \mu_k F_N$ , these equations lead to

$$a = \frac{F}{m} (\cos \theta - \mu_k \sin \theta) - g (\sin \theta + \mu_k \cos \theta)$$

which yields  $a = -2.1 \text{ m/s}^2$ , or  $|a| = 2.1 \text{ m/s}^2$ , for  $\mu_k = 0.30$ ,  $F = 50 \text{ N}$  and  $m = 5.0 \text{ kg}$ .

(b) The direction of  $\vec{a}$  is down the plane.

(c) With  $v_0 = +4.0 \text{ m/s}$  and  $v = 0$ , Eq. 2-16 gives

$$\Delta x = -\frac{(4.0 \text{ m/s})^2}{2(-2.1 \text{ m/s}^2)} = 3.9 \text{ m}.$$

(d) We expect  $\mu_s \geq \mu_k$ ; otherwise, an object started into motion would immediately start decelerating (before it gained any speed)! In the minimal expectation case, where  $\mu_s = 0.30$ , the maximum possible (downhill) static friction is, using Eq. 6-1,

$$f_{s,\max} = \mu_s F_N = \mu_s (F \sin \theta + mg \cos \theta)$$

which turns out to be 21 N. But in order to have no acceleration along the  $x$  axis, we must have

$$f_s = F \cos \theta - mg \sin \theta = 10 \text{ N}$$

(the fact that this is positive reinforces our suspicion that  $\vec{f}_s$  points downhill). Since the  $f_s$  needed to remain at rest is less than  $f_{s,\max}$  then it stays at that location.

1. (a) The change in kinetic energy for the meteorite would be

$$\Delta K = K_f - K_i = -K_i = -\frac{1}{2}m_i v_i^2 = -\frac{1}{2}(4 \times 10^6 \text{ kg})(15 \times 10^3 \text{ m/s})^2 = -5 \times 10^{14} \text{ J},$$

or  $|\Delta K| = 5 \times 10^{14} \text{ J}$ . The negative sign indicates that kinetic energy is lost.

(b) The energy loss in units of megatons of TNT would be

$$-\Delta K = (5 \times 10^{14} \text{ J}) \left( \frac{1 \text{ megaton TNT}}{4.2 \times 10^{15} \text{ J}} \right) = 0.1 \text{ megaton TNT}.$$

(c) The number of bombs  $N$  that the meteorite impact would correspond to is found by noting that megaton = 1000 kilotons and setting up the ratio:

$$N = \frac{0.1 \times 1000 \text{ kiloton TNT}}{13 \text{ kiloton TNT}} = 8.$$

2. With speed  $v = 11200$  m/s, we find

$$K = \frac{1}{2}mv^2 = \frac{1}{2}(2.9 \times 10^5 \text{ kg}) (11200 \text{ m/s})^2 = 1.8 \times 10^{13} \text{ J}.$$

3. (a) From Table 2-1, we have  $v^2 = v_0^2 + 2a\Delta x$ . Thus,

$$v = \sqrt{v_0^2 + 2a\Delta x} = \sqrt{(2.4 \times 10^7 \text{ m/s})^2 + 2 (3.6 \times 10^{15} \text{ m/s}^2)(0.035 \text{ m})} = 2.9 \times 10^7 \text{ m/s}.$$

(b) The initial kinetic energy is

$$K_i = \frac{1}{2}mv_0^2 = \frac{1}{2} (1.67 \times 10^{-27} \text{ kg})(2.4 \times 10^7 \text{ m/s})^2 = 4.8 \times 10^{-13} \text{ J}.$$

The final kinetic energy is

$$K_f = \frac{1}{2}mv^2 = \frac{1}{2} (1.67 \times 10^{-27} \text{ kg})(2.9 \times 10^7 \text{ m/s})^2 = 6.9 \times 10^{-13} \text{ J}.$$

The change in kinetic energy is  $\Delta K = 6.9 \times 10^{-13} \text{ J} - 4.8 \times 10^{-13} \text{ J} = 2.1 \times 10^{-13} \text{ J}$ .

4. The work done by the applied force  $\vec{F}_a$  is given by  $W = \vec{F}_a \cdot \vec{d} = F_a d \cos \phi$ . From Fig. 7-24, we see that  $W = 25$  J when  $\phi = 0$  and  $d = 5.0$  cm. This yields the magnitude of  $\vec{F}_a$ :

$$F_a = \frac{W}{d} = \frac{25 \text{ J}}{0.050 \text{ m}} = 5.0 \times 10^2 \text{ N}.$$

(a) For  $\phi = 64^\circ$ , we have  $W = F_a d \cos \phi = (5.0 \times 10^2 \text{ N})(0.050 \text{ m}) \cos 64^\circ = 11 \text{ J}$ .

(b) For  $\phi = 147^\circ$ , we have  $W = F_a d \cos \phi = (5.0 \times 10^2 \text{ N})(0.050 \text{ m}) \cos 147^\circ = -21 \text{ J}$ .



5. We denote the mass of the father as  $m$  and his initial speed  $v_i$ . The initial kinetic energy of the father is

$$K_i = \frac{1}{2} K_{\text{son}}$$

and his final kinetic energy (when his speed is  $v_f = v_i + 1.0 \text{ m/s}$ ) is  $K_f = K_{\text{son}}$ . We use these relations along with Eq. 7-1 in our solution.

(a) We see from the above that  $K_i = \frac{1}{2} K_f$  which (with SI units understood) leads to

$$\frac{1}{2} m v_i^2 = \frac{1}{2} \left[ \frac{1}{2} m (v_i + 1.0 \text{ m/s})^2 \right].$$

The mass cancels and we find a second-degree equation for  $v_i$ :

$$\frac{1}{2} v_i^2 - v_i - \frac{1}{2} = 0.$$

The positive root (from the quadratic formula) yields  $v_i = 2.4 \text{ m/s}$ .

(b) From the first relation above ( $K_i = \frac{1}{2} K_{\text{son}}$ ), we have

$$\frac{1}{2} m v_i^2 = \frac{1}{2} \left( \frac{1}{2} (m/2) v_{\text{son}}^2 \right)$$

and (after canceling  $m$  and one factor of  $1/2$ ) are led to  $v_{\text{son}} = 2v_i = 4.8 \text{ m/s}$ .

6. We apply the equation  $x(t) = x_0 + v_0 t + \frac{1}{2} a t^2$ , found in Table 2-1. Since at  $t = 0$  s,  $x_0 = 0$  and  $v_0 = 12$  m/s, the equation becomes (in unit of meters)

$$x(t) = 12t + \frac{1}{2} a t^2.$$

With  $x = 10$  m when  $t = 1.0$  s, the acceleration is found to be  $a = -4.0$  m/s<sup>2</sup>. The fact that  $a < 0$  implies that the bead is decelerating. Thus, the position is described by  $x(t) = 12t - 2.0t^2$ . Differentiating  $x$  with respect to  $t$  then yields

$$v(t) = \frac{dx}{dt} = 12 - 4.0t.$$

Indeed at  $t = 3.0$  s,  $v(t = 3.0) = 0$  and the bead stops momentarily. The speed at  $t = 10$  s is  $v(t = 10) = -28$  m/s, and the corresponding kinetic energy is

$$K = \frac{1}{2} m v^2 = \frac{1}{2} (1.8 \times 10^{-2} \text{ kg}) (-28 \text{ m/s})^2 = 7.1 \text{ J}.$$

7. By the work-kinetic energy theorem,

$$W = \Delta K = \frac{1}{2}mv_f^2 - \frac{1}{2}mv_i^2 = \frac{1}{2}(2.0\text{ kg})\left((6.0\text{ m/s})^2 - (4.0\text{ m/s})^2\right) = 20\text{ J}.$$

We note that the *directions* of  $\vec{v}_f$  and  $\vec{v}_i$  play no role in the calculation.

8. Eq. 7-8 readily yields

$$W = F_x \Delta x + F_y \Delta y = (2.0 \text{ N})\cos(100^\circ)(3.0 \text{ m}) + (2.0 \text{ N})\sin(100^\circ)(4.0 \text{ m}) = 6.8 \text{ J}.$$

9. Since this involves constant-acceleration motion, we can apply the equations of Table 2-1, such as  $x = v_0 t + \frac{1}{2} a t^2$  (where  $x_0 = 0$ ). We choose to analyze the third and fifth points, obtaining

$$0.2 \text{ m} = v_0(1.0 \text{ s}) + \frac{1}{2} a (1.0 \text{ s})^2$$

$$0.8 \text{ m} = v_0(2.0 \text{ s}) + \frac{1}{2} a (2.0 \text{ s})^2$$

Simultaneous solution of the equations leads to  $v_0 = 0$  and  $a = 0.40 \text{ m/s}^2$ . We now have two ways to finish the problem. One is to compute force from  $F = ma$  and then obtain the work from Eq. 7-7. The other is to find  $\Delta K$  as a way of computing  $W$  (in accordance with Eq. 7-10). In this latter approach, we find the velocity at  $t = 2.0 \text{ s}$  from  $v = v_0 + at$  (so  $v = 0.80 \text{ m/s}$ ). Thus,

$$W = \Delta K = \frac{1}{2} (3.0 \text{ kg}) (0.80 \text{ m/s})^2 = 0.96 \text{ J}.$$

10. Using Eq. 7-8 (and Eq. 3-23), we find the work done by the water on the ice block:

$$\begin{aligned} W = \vec{F} \cdot \vec{d} &= \left[ (210 \text{ N})\hat{i} - (150 \text{ N})\hat{j} \right] \cdot \left[ (15 \text{ m})\hat{i} - (12 \text{ m})\hat{j} \right] = (210 \text{ N})(15 \text{ m}) + (-150 \text{ N})(-12 \text{ m}) \\ &= 5.0 \times 10^3 \text{ J.} \end{aligned}$$

11. We choose  $+x$  as the direction of motion (so  $\vec{a}$  and  $\vec{F}$  are negative-valued).

(a) Newton's second law readily yields  $\vec{F} = (85 \text{ kg})(-2.0 \text{ m/s}^2)$  so that

$$F = |\vec{F}| = 1.7 \times 10^2 \text{ N}.$$

(b) From Eq. 2-16 (with  $v = 0$ ) we have

$$0 = v_0^2 + 2a\Delta x \Rightarrow \Delta x = -\frac{(37 \text{ m/s})^2}{2(-2.0 \text{ m/s}^2)} = 3.4 \times 10^2 \text{ m}.$$

Alternatively, this can be worked using the work-energy theorem.

(c) Since  $\vec{F}$  is opposite to the direction of motion (so the angle  $\phi$  between  $\vec{F}$  and  $\vec{d} = \Delta x$  is  $180^\circ$ ) then Eq. 7-7 gives the work done as  $W = -F\Delta x = -5.8 \times 10^4 \text{ J}$ .

(d) In this case, Newton's second law yields  $\vec{F} = (85 \text{ kg})(-4.0 \text{ m/s}^2)$  so that  $F = |\vec{F}| = 3.4 \times 10^2 \text{ N}$ .

(e) From Eq. 2-16, we now have

$$\Delta x = -\frac{(37 \text{ m/s})^2}{2(-4.0 \text{ m/s}^2)} = 1.7 \times 10^2 \text{ m}.$$

(f) The force  $\vec{F}$  is again opposite to the direction of motion (so the angle  $\phi$  is again  $180^\circ$ ) so that Eq. 7-7 leads to  $W = -F\Delta x = -5.8 \times 10^4 \text{ J}$ . The fact that this agrees with the result of part (c) provides insight into the concept of work.

12. The change in kinetic energy can be written as

$$\Delta K = \frac{1}{2}m(v_f^2 - v_i^2) = \frac{1}{2}m(2a\Delta x) = ma\Delta x$$

where we have used  $v_f^2 = v_i^2 + 2a\Delta x$  from Table 2-1. From Fig. 7-27, we see that  $\Delta K = (0 - 30) \text{ J} = -30 \text{ J}$  when  $\Delta x = +5 \text{ m}$ . The acceleration can then be obtained as

$$a = \frac{\Delta K}{m\Delta x} = \frac{(-30 \text{ J})}{(8.0 \text{ kg})(5.0 \text{ m})} = -0.75 \text{ m/s}^2.$$

The negative sign indicates that the mass is decelerating. From the figure, we also see that when  $x = 5 \text{ m}$  the kinetic energy becomes zero, implying that the mass comes to rest momentarily. Thus,

$$v_0^2 = v^2 - 2a\Delta x = 0 - 2(-0.75 \text{ m/s}^2)(5.0 \text{ m}) = 7.5 \text{ m}^2/\text{s}^2,$$

or  $v_0 = 2.7 \text{ m/s}$ . The speed of the object when  $x = -3.0 \text{ m}$  is

$$v = \sqrt{v_0^2 + 2a\Delta x} = \sqrt{7.5 \text{ m}^2/\text{s}^2 + 2(-0.75 \text{ m/s}^2)(-3.0 \text{ m})} = \sqrt{12} \text{ m/s} = 3.5 \text{ m/s}.$$



13. (a) The forces are constant, so the work done by any one of them is given by  $W = \vec{F} \cdot \vec{d}$ , where  $\vec{d}$  is the displacement. Force  $\vec{F}_1$  is in the direction of the displacement, so

$$W_1 = F_1 d \cos \phi_1 = (5.00 \text{ N})(3.00 \text{ m}) \cos 0^\circ = 15.0 \text{ J}.$$

Force  $\vec{F}_2$  makes an angle of  $120^\circ$  with the displacement, so

$$W_2 = F_2 d \cos \phi_2 = (9.00 \text{ N})(3.00 \text{ m}) \cos 120^\circ = -13.5 \text{ J}.$$

Force  $\vec{F}_3$  is perpendicular to the displacement, so

$$W_3 = F_3 d \cos \phi_3 = 0 \text{ since } \cos 90^\circ = 0.$$

The net work done by the three forces is

$$W = W_1 + W_2 + W_3 = 15.0 \text{ J} - 13.5 \text{ J} + 0 = +1.50 \text{ J}.$$

(b) If no other forces do work on the box, its kinetic energy increases by 1.50 J during the displacement.

14. (a) From Eq. 7-6,  $F = W/x = 3.00 \text{ N}$  (this is the slope of the graph).

(b) Eq. 7-10 yields  $K = K_i + W = 3.00 \text{ J} + 6.00 \text{ J} = 9.00 \text{ J}$ .

15. Using the work-kinetic energy theorem, we have

$$\Delta K = W = \vec{F} \cdot \vec{d} = Fd \cos \phi$$

In addition,  $F = 12 \text{ N}$  and  $d = \sqrt{(2.00 \text{ m})^2 + (-4.00 \text{ m})^2 + (3.00 \text{ m})^2} = 5.39 \text{ m}$ .

(a) If  $\Delta K = +30.0 \text{ J}$ , then

$$\phi = \cos^{-1} \left( \frac{\Delta K}{Fd} \right) = \cos^{-1} \left( \frac{30.0 \text{ J}}{(12.0 \text{ N})(5.39 \text{ m})} \right) = 62.3^\circ.$$

(b)  $\Delta K = -30.0 \text{ J}$ , then

$$\phi = \cos^{-1} \left( \frac{\Delta K}{Fd} \right) = \cos^{-1} \left( \frac{-30.0 \text{ J}}{(12.0 \text{ N})(5.39 \text{ m})} \right) = 118^\circ$$

16. The forces are all constant, so the total work done by them is given by  $W = F_{\text{net}} \Delta x$ , where  $F_{\text{net}}$  is the magnitude of the net force and  $\Delta x$  is the magnitude of the displacement. We add the three vectors, finding the  $x$  and  $y$  components of the net force:

$$F_{\text{net } x} = -F_1 - F_2 \sin 50.0^\circ + F_3 \cos 35.0^\circ = -3.00 \text{ N} - (4.00 \text{ N}) \sin 35.0^\circ + (10.0 \text{ N}) \cos 35.0^\circ = 2.13 \text{ N}$$

$$F_{\text{net } y} = -F_2 \cos 50.0^\circ + F_3 \sin 35.0^\circ = -(4.00 \text{ N}) \cos 50.0^\circ + (10.0 \text{ N}) \sin 35.0^\circ = 3.17 \text{ N}.$$

The magnitude of the net force is

$$F_{\text{net}} = \sqrt{F_{\text{net } x}^2 + F_{\text{net } y}^2} = \sqrt{(2.13 \text{ N})^2 + (3.17 \text{ N})^2} = 3.82 \text{ N}.$$

The work done by the net force is

$$W = F_{\text{net}} d = (3.82 \text{ N})(4.00 \text{ m}) = 15.3 \text{ J}$$

where we have used the fact that  $\vec{d} \parallel \vec{F}_{\text{net}}$  (which follows from the fact that the canister started from rest and moved horizontally under the action of horizontal forces — the resultant effect of which is expressed by  $\vec{F}_{\text{net}}$ ).

17. (a) We use  $\vec{F}$  to denote the upward force exerted by the cable on the astronaut. The force of the cable is upward and the force of gravity is  $mg$  downward. Furthermore, the acceleration of the astronaut is  $g/10$  upward. According to Newton's second law,  $F - mg = mg/10$ , so  $F = 11 mg/10$ . Since the force  $\vec{F}$  and the displacement  $\vec{d}$  are in the same direction, the work done by  $\vec{F}$  is

$$W_F = Fd = \frac{11mgd}{10} = \frac{11 (72 \text{ kg})(9.8 \text{ m/s}^2)(15 \text{ m})}{10} = 1.164 \times 10^4 \text{ J}$$

which (with respect to significant figures) should be quoted as  $1.2 \times 10^4 \text{ J}$ .

(b) The force of gravity has magnitude  $mg$  and is opposite in direction to the displacement. Thus, using Eq. 7-7, the work done by gravity is

$$W_g = -mgd = - (72 \text{ kg})(9.8 \text{ m/s}^2)(15 \text{ m}) = -1.058 \times 10^4 \text{ J}$$

which should be quoted as  $-1.1 \times 10^4 \text{ J}$ .

(c) The total work done is  $W = 1.164 \times 10^4 \text{ J} - 1.058 \times 10^4 \text{ J} = 1.06 \times 10^3 \text{ J}$ . Since the astronaut started from rest, the work-kinetic energy theorem tells us that this (which we round to  $1.1 \times 10^3 \text{ J}$ ) is her final kinetic energy.

(d) Since  $K = \frac{1}{2}mv^2$ , her final speed is

$$v = \sqrt{\frac{2K}{m}} = \sqrt{\frac{2(1.06 \times 10^3 \text{ J})}{72 \text{ kg}}} = 5.4 \text{ m/s}.$$

18. In both cases, there is no acceleration, so the lifting force is equal to the weight of the object.

(a) Eq. 7-8 leads to  $W = \vec{F} \cdot \vec{d} = (360 \text{ kN})(0.10 \text{ m}) = 36 \text{ kJ}$ .

(b) In this case, we find  $W = (4000 \text{ N})(0.050 \text{ m}) = 2.0 \times 10^2 \text{ J}$ .

19. (a) We use  $F$  to denote the magnitude of the force of the cord on the block. This force is upward, opposite to the force of gravity (which has magnitude  $Mg$ ). The acceleration is  $\vec{a} = g/4$  downward. Taking the downward direction to be positive, then Newton's second law yields

$$\vec{F}_{\text{net}} = m\vec{a} \Rightarrow Mg - F = M\left(\frac{g}{4}\right)$$

so  $F = 3Mg/4$ . The displacement is downward, so the work done by the cord's force is, using Eq. 7-7,

$$W_F = -Fd = -3Mgd/4.$$

(b) The force of gravity is in the same direction as the displacement, so it does work  $W_g = Mgd$ .

(c) The total work done on the block is  $-3Mgd/4 + Mgd = Mgd/4$ . Since the block starts from rest, we use Eq. 7-15 to conclude that this ( $Mgd/4$ ) is the block's kinetic energy  $K$  at the moment it has descended the distance  $d$ .

(d) Since  $K = \frac{1}{2}Mv^2$ , the speed is

$$v = \sqrt{\frac{2K}{M}} = \sqrt{\frac{2(Mgd/4)}{M}} = \sqrt{\frac{gd}{2}}$$

at the moment the block has descended the distance  $d$ .

20. (a) Using notation common to many vector capable calculators, we have (from Eq. 7-8)  $W = \text{dot}([20.0, 0] + [0, -(3.00)(9.8)], [0.500 \angle 30.0^\circ]) = +1.31 \text{ J}$ .

(b) Eq. 7-10 (along with Eq. 7-1) then leads to

$$v = \sqrt{2(1.31 \text{ J})/(3.00 \text{ kg})} = 0.935 \text{ m/s}.$$



21. The fact that the applied force  $\vec{F}_a$  causes the box to move up a frictionless ramp at a constant speed implies that there is no net change in the kinetic energy:  $\Delta K = 0$ . Thus, the work done by  $\vec{F}_a$  must be equal to the negative work done by gravity:  $W_a = -W_g$ . Since the box is displaced vertically upward by  $h = 0.150$  m, we have

$$W_a = +mgh = (3.00 \text{ kg})(9.80 \text{ m/s}^2)(0.150 \text{ m}) = 4.41 \text{ J}$$

22. From the figure, one may write the kinetic energy (in units of J) as a function of  $x$  as

$$K = K_s - 20x = 40 - 20x$$

Since  $W = \Delta K = \vec{F}_x \cdot \Delta x$ , the component of the force along the force along  $+x$  is  $F_x = dK / dx = -20$  N. The normal force on the block is  $F_N = F_y$ , which is related to the gravitational force by

$$mg = \sqrt{F_x^2 + (-F_y)^2}.$$

(Note that  $F_N$  points in the opposite direction of the component of the gravitational force.)

With an initial kinetic energy  $K_s = 40.0$  J and  $v_0 = 4.00$  m/s, the mass of the block is

$$m = \frac{2K_s}{v_0^2} = \frac{2(40.0 \text{ J})}{(4.00 \text{ m/s})^2} = 5.00 \text{ kg}.$$

Thus, the normal force is

$$F_y = \sqrt{(mg)^2 - F_x^2} = \sqrt{(5.0 \text{ kg})(9.8 \text{ m/s}^2)^2 - (20 \text{ N})^2} = 44.7 \text{ N} \approx 45 \text{ N}.$$

23. Eq. 7-15 applies, but the wording of the problem suggests that it is only necessary to examine the contribution from the rope (which would be the " $W_a$ " term in Eq. 7-15):

$$W_a = -(50 \text{ N})(0.50 \text{ m}) = -25 \text{ J}$$

(the minus sign arises from the fact that the pull from the rope is anti-parallel to the direction of motion of the block). Thus, the kinetic energy would have been 25 J greater if the rope had not been attached (given the same displacement).

24. We use  $d$  to denote the magnitude of the spelunker's displacement during each stage. The mass of the spelunker is  $m = 80.0$  kg. The work done by the lifting force is denoted  $W_i$  where  $i = 1, 2, 3$  for the three stages. We apply the work-energy theorem, Eq. 17-15.

(a) For stage 1,  $W_1 - mgd = \Delta K_1 = \frac{1}{2}mv_1^2$ , where  $v_1 = 5.00$  m/s. This gives

$$W_1 = mgd + \frac{1}{2}mv_1^2 = (80.0 \text{ kg})(9.80 \text{ m/s}^2)(10.0 \text{ m}) + \frac{1}{2}(80.0 \text{ kg})(5.00 \text{ m/s})^2 = 8.84 \times 10^3 \text{ J}.$$

(b) For stage 2,  $W_2 - mgd = \Delta K_2 = 0$ , which leads to

$$W_2 = mgd = (80.0 \text{ kg})(9.80 \text{ m/s}^2)(10.0 \text{ m}) = 7.84 \times 10^3 \text{ J}.$$

(c) For stage 3,  $W_3 - mgd = \Delta K_3 = -\frac{1}{2}mv_1^2$ . We obtain

$$W_3 = mgd - \frac{1}{2}mv_1^2 = (80.0 \text{ kg})(9.80 \text{ m/s}^2)(10.0 \text{ m}) - \frac{1}{2}(80.0 \text{ kg})(5.00 \text{ m/s})^2 = 6.84 \times 10^3 \text{ J}.$$

25. (a) The net upward force is given by

$$F + F_N - (m + M)g = (m + M)a$$

where  $m = 0.250$  kg is the mass of the cheese,  $M = 900$  kg is the mass of the elevator cab,  $F$  is the force from the cable, and  $F_N = 3.00$  N is the normal force on the cheese. On the cheese alone, we have

$$F_N - mg = ma \Rightarrow a = \frac{3.00 \text{ N} - (0.250 \text{ kg})(9.80 \text{ m/s}^2)}{0.250 \text{ kg}} = 2.20 \text{ m/s}^2.$$

Thus the force from the cable is  $F = (m + M)(a + g) - F_N = 1.08 \times 10^4$  N, and the work done by the cable on the cab is

$$W = Fd_1 = (1.80 \times 10^4 \text{ N})(2.40 \text{ m}) = 2.59 \times 10^4 \text{ J}.$$

(b) If  $W = 92.61$  kJ and  $d_2 = 10.5$  m, the magnitude of the normal force is

$$F_N = (m + M)g - \frac{W}{d_2} = (0.250 \text{ kg} + 900 \text{ kg})(9.80 \text{ m/s}^2) - \frac{9.261 \times 10^4 \text{ J}}{10.5 \text{ m}} = 2.45 \text{ N}.$$

26. The spring constant is  $k = 100 \text{ N/m}$  and the maximum elongation is  $x_i = 5.00 \text{ m}$ . Using Eq. 7-25 with  $x_f = 0$ , the work is found to be

$$W = \frac{1}{2} k x_i^2 = \frac{1}{2} (100 \text{ N/m}) (5.00 \text{ m})^2 = 1.25 \times 10^3 \text{ J}.$$

27. From Eq. 7-25, we see that the work done by the spring force is given by

$$W_s = \frac{1}{2}k(x_i^2 - x_f^2).$$

The fact that 360 N of force must be applied to pull the block to  $x = +4.0$  cm implies that the spring constant is

$$k = \frac{360 \text{ N}}{4.0 \text{ cm}} = 90 \text{ N/cm} = 9.0 \times 10^3 \text{ N/m}.$$

(a) When the block moves from  $x_i = +5.0$  cm to  $x = +3.0$  cm, we have

$$W_s = \frac{1}{2}(9.0 \times 10^3 \text{ N/m})[(0.050 \text{ m})^2 - (0.030 \text{ m})^2] = 7.2 \text{ J}.$$

(b) Moving from  $x_i = +5.0$  cm to  $x = -3.0$  cm, we have

$$W_s = \frac{1}{2}(9.0 \times 10^3 \text{ N/m})[(0.050 \text{ m})^2 - (-0.030 \text{ m})^2] = 7.2 \text{ J}.$$

(c) Moving from  $x_i = +5.0$  cm to  $x = -5.0$  cm, we have

$$W_s = \frac{1}{2}(9.0 \times 10^3 \text{ N/m})[(0.050 \text{ m})^2 - (-0.050 \text{ m})^2] = 0 \text{ J}.$$

(d) Moving from  $x_i = +5.0$  cm to  $x = -9.0$  cm, we have

$$W_s = \frac{1}{2}(9.0 \times 10^3 \text{ N/m})[(0.050 \text{ m})^2 - (-0.090 \text{ m})^2] = -25 \text{ J}.$$

28. We make use of Eq. 7-25 and Eq. 7-28 since the block is stationary before and after the displacement. The work done by the applied force can be written as

$$W_a = -W_s = \frac{1}{2}k(x_f^2 - x_i^2).$$

The spring constant is  $k = (80 \text{ N}) / (2.0 \text{ cm}) = 4.0 \times 10^3 \text{ N/m}$ . With  $W_a = 4.0 \text{ J}$ , and  $x_i = -2.0 \text{ cm}$ , we have

$$x_f = \pm \sqrt{\frac{2W_a}{k} + x_i^2} = \pm \sqrt{\frac{2(4.0 \text{ J})}{(4.0 \times 10^3 \text{ N/m})} + (-0.020 \text{ m})^2} = \pm 0.049 \text{ m} = \pm 4.9 \text{ cm}.$$



29. (a) As the body moves along the  $x$  axis from  $x_i = 3.0$  m to  $x_f = 4.0$  m the work done by the force is

$$W = \int_{x_i}^{x_f} F_x dx = \int_{x_i}^{x_f} -6x dx = -3(x_f^2 - x_i^2) = -3(4.0^2 - 3.0^2) = -21 \text{ J.}$$

According to the work-kinetic energy theorem, this gives the change in the kinetic energy:

$$W = \Delta K = \frac{1}{2}m(v_f^2 - v_i^2)$$

where  $v_i$  is the initial velocity (at  $x_i$ ) and  $v_f$  is the final velocity (at  $x_f$ ). The theorem yields

$$v_f = \sqrt{\frac{2W}{m} + v_i^2} = \sqrt{\frac{2(-21 \text{ J})}{2.0 \text{ kg}} + (8.0 \text{ m/s})^2} = 6.6 \text{ m/s.}$$

(b) The velocity of the particle is  $v_f = 5.0$  m/s when it is at  $x = x_f$ . The work-kinetic energy theorem is used to solve for  $x_f$ . The net work done on the particle is  $W = -3(x_f^2 - x_i^2)$ , so the theorem leads to

$$-3(x_f^2 - x_i^2) = \frac{1}{2}m(v_f^2 - v_i^2).$$

Thus,

$$x_f = \sqrt{-\frac{m}{6}(v_f^2 - v_i^2) + x_i^2} = \sqrt{-\frac{2.0 \text{ kg}}{6 \text{ N/m}}((5.0 \text{ m/s})^2 - (8.0 \text{ m/s})^2) + (3.0 \text{ m})^2} = 4.7 \text{ m.}$$

30. The work done by the spring force is given by Eq. 7-25:

$$W_s = \frac{1}{2}k(x_i^2 - x_f^2).$$

Since  $F_x = -kx$ , the slope in Fig. 7-36 corresponds to the spring constant  $k$ . Its value is given by  $k = 80 \text{ N/cm} = 8.0 \times 10^3 \text{ N/m}$ .

(a) When the block moves from  $x_i = +8.0 \text{ cm}$  to  $x = +5.0 \text{ cm}$ , we have

$$W_s = \frac{1}{2}(8.0 \times 10^3 \text{ N/m})[(0.080 \text{ m})^2 - (0.050 \text{ m})^2] = 15.6 \text{ J} \approx 16 \text{ J}.$$

(b) Moving from  $x_i = +8.0 \text{ cm}$  to  $x = -5.0 \text{ cm}$ , we have

$$W_s = \frac{1}{2}(8.0 \times 10^3 \text{ N/m})[(0.080 \text{ m})^2 - (-0.050 \text{ m})^2] = 15.6 \text{ J} \approx 16 \text{ J}.$$

(c) Moving from  $x_i = +8.0 \text{ cm}$  to  $x = -8.0 \text{ cm}$ , we have

$$W_s = \frac{1}{2}(8.0 \times 10^3 \text{ N/m})[(0.080 \text{ m})^2 - (-0.080 \text{ m})^2] = 0 \text{ J}.$$

(d) Moving from  $x_i = +8.0 \text{ cm}$  to  $x = -10.0 \text{ cm}$ , we have

$$W_s = \frac{1}{2}(8.0 \times 10^3 \text{ N/m})[(0.080 \text{ m})^2 - (-0.10 \text{ m})^2] = -14.4 \text{ J} \approx -14 \text{ J}.$$

31. The work done by the spring force is given by Eq. 7-25:  $W_s = \frac{1}{2}k(x_i^2 - x_f^2)$ .

The spring constant  $k$  can be deduced from Fig. 7-37 which shows the amount of work done to pull the block from 0 to  $x = 3.0$  cm. The parabola  $W_a = kx^2 / 2$  contains (0,0), (2.0 cm, 0.40 J) and (3.0 cm, 0.90 J). Thus, we may infer from the data that  $k = 2.0 \times 10^3$  N/m.

(a) When the block moves from  $x_i = +5.0$  cm to  $x = +4.0$  cm, we have

$$W_s = \frac{1}{2}(2.0 \times 10^3 \text{ N/m})[(0.050 \text{ m})^2 - (0.040 \text{ m})^2] = 0.90 \text{ J}.$$

(b) Moving from  $x_i = +5.0$  cm to  $x = -2.0$  cm, we have

$$W_s = \frac{1}{2}(2.0 \times 10^3 \text{ N/m})[(0.050 \text{ m})^2 - (-0.020 \text{ m})^2] = 2.1 \text{ J}.$$

(c) Moving from  $x_i = +5.0$  cm to  $x = -5.0$  cm, we have

$$W_s = \frac{1}{2}(2.0 \times 10^3 \text{ N/m})[(0.050 \text{ m})^2 - (-0.050 \text{ m})^2] = 0 \text{ J}.$$

32. Hooke's law and the work done by a spring is discussed in the chapter. We apply work-kinetic energy theorem, in the form of  $\Delta K = W_a + W_s$ , to the points in Figure 7-38 at  $x = 1.0$  m and  $x = 2.0$  m, respectively. The "applied" work  $W_a$  is that due to the constant force  $\vec{P}$ .

$$4 \text{ J} = P(1.0 \text{ m}) - \frac{1}{2}k(1.0 \text{ m})^2$$
$$0 = P(2.0 \text{ m}) - \frac{1}{2}k(2.0 \text{ m})^2$$

(a) Simultaneous solution leads to  $P = 8.0$  N.

(b) Similarly, we find  $k = 8.0$  N/m.

33. (a) This is a situation where Eq. 7-28 applies, so we have

$$Fx = \frac{1}{2}kx^2 \Rightarrow (3.0 \text{ N})x = \frac{1}{2}(50 \text{ N/m})x^2$$

which (other than the trivial root) gives  $x = (3.0/25) \text{ m} = 0.12 \text{ m}$ .

(b) The work done by the applied force is  $W_a = Fx = (3.0 \text{ N})(0.12 \text{ m}) = 0.36 \text{ J}$ .

(c) Eq. 7-28 immediately gives  $W_s = -W_a = -0.36 \text{ J}$ .

(d) With  $K_f = K$  considered variable and  $K_i = 0$ , Eq. 7-27 gives  $K = Fx - \frac{1}{2}kx^2$ . We take the derivative of  $K$  with respect to  $x$  and set the resulting expression equal to zero, in order to find the position  $x_c$  which corresponds to a maximum value of  $K$ :

$$x_c = \frac{F}{k} = (3.0/50) \text{ m} = 0.060 \text{ m}.$$

We note that  $x_c$  is also the point where the applied and spring forces “balance.”

(e) At  $x_c$  we find  $K = K_{\max} = 0.090 \text{ J}$ .

34. From Eq. 7-32, we see that the “area” in the graph is equivalent to the work done. Finding that area (in terms of rectangular [length  $\times$  width] and triangular [ $\frac{1}{2}$  base  $\times$  height] areas) we obtain

$$W = W_{0 < x < 2} + W_{2 < x < 4} + W_{4 < x < 6} + W_{6 < x < 8} = (20 + 10 + 0 - 5) \text{ J} = 25 \text{ J}.$$

35. (a) The graph shows  $F$  as a function of  $x$  assuming  $x_0$  is positive. The work is negative as the object moves from  $x = 0$  to  $x = x_0$  and positive as it moves from  $x = x_0$  to  $x = 2x_0$ .


Since the area of a triangle is (base)(altitude)/2, the work done from  $x = 0$  to  $x = x_0$  is  $-(x_0)(F_0)/2$  and the work done from  $x = x_0$  to  $x = 2x_0$  is

$$(2x_0 - x_0)(F_0)/2 = (x_0)(F_0)/2$$

The total work is the sum, which is zero.

(b) The integral for the work is

$$W = \int_0^{2x_0} F_0 \left( \frac{x}{x_0} - 1 \right) dx = F_0 \left( \frac{x^2}{2x_0} - x \right) \Bigg|_0^{2x_0} = 0.$$

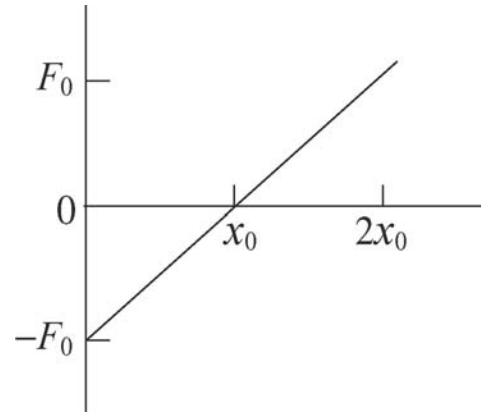

36. According to the graph the acceleration  $a$  varies linearly with the coordinate  $x$ . We may write  $a = \alpha x$ , where  $\alpha$  is the slope of the graph. Numerically,

$$\alpha = \frac{20 \text{ m/s}^2}{8.0 \text{ m}} = 2.5 \text{ s}^{-2}.$$

The force on the brick is in the positive  $x$  direction and, according to Newton's second law, its magnitude is given by  $F = ma = m\alpha x$ . If  $x_f$  is the final coordinate, the work done by the force is

$$W = \int_0^{x_f} F \, dx = m\alpha \int_0^{x_f} x \, dx = \frac{m\alpha}{2} x_f^2 = \frac{(10 \text{ kg})(2.5 \text{ s}^{-2})}{2} (8.0 \text{ m})^2 = 8.0 \times 10^2 \text{ J}.$$



37. We choose to work this using Eq. 7-10 (the work-kinetic energy theorem). To find the initial and final kinetic energies, we need the speeds, so

$$v = \frac{dx}{dt} = 3.0 - 8.0t + 3.0t^2$$

in SI units. Thus, the initial speed is  $v_i = 3.0$  m/s and the speed at  $t = 4$  s is  $v_f = 19$  m/s. The change in kinetic energy for the object of mass  $m = 3.0$  kg is therefore

$$\Delta K = \frac{1}{2} m (v_f^2 - v_i^2) = 528 \text{ J}$$

which we round off to two figures and (using the work-kinetic energy theorem) conclude that the work done is  $W = 5.3 \times 10^2$  J.

38. Using Eq. 7-32, we find

$$W = \int_{0.25}^{1.25} e^{-4x^2} dx = 0.21 \text{ J}$$

where the result has been obtained numerically. Many modern calculators have that capability, as well as most math software packages that a great many students have access to.

39. (a) We first multiply the vertical axis by the mass, so that it becomes a graph of the applied force. Now, adding the triangular and rectangular “areas” in the graph (for  $0 \leq x \leq 4$ ) gives 42 J for the work done.

(b) Counting the “areas” under the axis as negative contributions, we find (for  $0 \leq x \leq 7$ ) the work to be 30 J at  $x = 7.0$  m.

(c) And at  $x = 9.0$  m, the work is 12 J.

(d) Eq. 7-10 (along with Eq. 7-1) leads to speed  $v = 6.5$  m/s at  $x = 4.0$  m. Returning to the original graph (where  $a$  was plotted) we note that (since it started from rest) it has received acceleration(s) (up to this point) only in the  $+x$  direction and consequently must have a velocity vector pointing in the  $+x$  direction at  $x = 4.0$  m.

(e) Now, using the result of part (b) and Eq. 7-10 (along with Eq. 7-1) we find the speed is 5.5 m/s at  $x = 7.0$  m. Although it has experienced some deceleration during the  $0 \leq x \leq 7$  interval, its velocity vector still points in the  $+x$  direction.

(f) Finally, using the result of part (c) and Eq. 7-10 (along with Eq. 7-1) we find its speed  $v = 3.5$  m/s at  $x = 9.0$  m. It certainly has experienced a significant amount of deceleration during the  $0 \leq x \leq 9$  interval; nonetheless, its velocity vector *still* points in the  $+x$  direction.

40. (a) Using the work-kinetic energy theorem

$$K_f = K_i + \int_0^{2.0} (2.5 - x^2) dx = 0 + (2.5)(2.0) - \frac{1}{3}(2.0)^3 = 2.3 \text{ J.}$$

(b) For a variable end-point, we have  $K_f$  as a function of  $x$ , which could be differentiated to find the extremum value, but we recognize that this is equivalent to solving  $F = 0$  for  $x$ :

$$F = 0 \Rightarrow 2.5 - x^2 = 0.$$

Thus,  $K$  is extremized at  $x = \sqrt{2.5} \approx 1.6 \text{ m}$  and we obtain

$$K_f = K_i + \int_0^{\sqrt{2.5}} (2.5 - x^2) dx = 0 + (2.5)(\sqrt{2.5}) - \frac{1}{3}(\sqrt{2.5})^3 = 2.6 \text{ J.}$$

Recalling our answer for part (a), it is clear that this extreme value is a maximum.

41. As the body moves along the  $x$  axis from  $x_i = 0$  m to  $x_f = 3.00$  m the work done by the force is

$$W = \int_{x_i}^{x_f} F_x dx = \int_{x_i}^{x_f} (cx - 3.00x^2) dx = \left( \frac{c}{2} x^2 - x^3 \right)_0^3 = \frac{c}{2} (3.00)^2 - (3.00)^3$$

$$= 4.50c - 27.0.$$

However,  $W = \Delta K = (11.0 - 20.0) = -9.00$  J from the work-kinetic energy theorem. Thus,

$$4.50c - 27.0 = -9.00$$

or  $c = 4.00$  N/m.

42. We solve the problem using the work-kinetic energy theorem which states that the change in kinetic energy is equal to the work done by the applied force,  $\Delta K = W$ . In our problem, the work done is  $W = Fd$ , where  $F$  is the tension in the cord and  $d$  is the length of the cord pulled as the cart slides from  $x_1$  to  $x_2$ . From Fig. 7-42, we have

$$\begin{aligned} d &= \sqrt{x_1^2 + h^2} - \sqrt{x_2^2 + h^2} = \sqrt{(3.00 \text{ m})^2 + (1.20 \text{ m})^2} - \sqrt{(1.00 \text{ m})^2 + (1.20 \text{ m})^2} \\ &= 3.23 \text{ m} - 1.56 \text{ m} = 1.67 \text{ m} \end{aligned}$$

which yields  $\Delta K = Fd = (25.0 \text{ N})(1.67 \text{ m}) = 41.7 \text{ J}$ .

43. The power associated with force  $\vec{F}$  is given by  $P = \vec{F} \cdot \vec{v}$ , where  $\vec{v}$  is the velocity of the object on which the force acts. Thus,

$$P = \vec{F} \cdot \vec{v} = Fv \cos \phi = (122 \text{ N})(5.0 \text{ m/s}) \cos 37^\circ = 4.9 \times 10^2 \text{ W}.$$

44. Recognizing that the force in the cable must equal the total weight (since there is no acceleration), we employ Eq. 7-47:

$$P = Fv \cos \theta = mg \left( \frac{\Delta x}{\Delta t} \right)$$

where we have used the fact that  $\theta = 0^\circ$  (both the force of the cable and the elevator's motion are upward). Thus,

$$P = (3.0 \times 10^3 \text{ kg})(9.8 \text{ m/s}^2) \left( \frac{210 \text{ m}}{23 \text{ s}} \right) = 2.7 \times 10^5 \text{ W}.$$



45. (a) The power is given by  $P = Fv$  and the work done by  $\vec{F}$  from time  $t_1$  to time  $t_2$  is given by

$$W = \int_{t_1}^{t_2} P \, dt = \int_{t_1}^{t_2} Fv \, dt.$$

Since  $\vec{F}$  is the net force, the magnitude of the acceleration is  $a = F/m$ , and, since the initial velocity is  $v_0 = 0$ , the velocity as a function of time is given by  $v = v_0 + at = (F/m)t$ . Thus

$$W = \int_{t_1}^{t_2} (F^2 / m)t \, dt = \frac{1}{2}(F^2 / m)(t_2^2 - t_1^2).$$

For  $t_1 = 0$  and  $t_2 = 1.0 \text{ s}$ ,

$$W = \frac{1}{2} \left( \frac{(5.0 \text{ N})^2}{15 \text{ kg}} \right) (1.0 \text{ s})^2 = 0.83 \text{ J}.$$

(b) For  $t_1 = 1.0 \text{ s}$ , and  $t_2 = 2.0 \text{ s}$ ,

$$W = \frac{1}{2} \left( \frac{(5.0 \text{ N})^2}{15 \text{ kg}} \right) [(2.0 \text{ s})^2 - (1.0 \text{ s})^2] = 2.5 \text{ J}.$$

(c) For  $t_1 = 2.0 \text{ s}$  and  $t_2 = 3.0 \text{ s}$ ,

$$W = \frac{1}{2} \left( \frac{(5.0 \text{ N})^2}{15 \text{ kg}} \right) [(3.0 \text{ s})^2 - (2.0 \text{ s})^2] = 4.2 \text{ J}.$$

(d) Substituting  $v = (F/m)t$  into  $P = Fv$  we obtain  $P = F^2 t / m$  for the power at any time  $t$ . At the end of the third second

$$P = \left( \frac{(5.0 \text{ N})^2 (3.0 \text{ s})}{15 \text{ kg}} \right) = 5.0 \text{ W}.$$

46. (a) Since constant speed implies  $\Delta K = 0$ , we require  $W_a = -W_g$ , by Eq. 7-15. Since  $W_g$  is the same in both cases (same weight and same path), then  $W_a = 9.0 \times 10^2$  J just as it was in the first case.

(b) Since the speed of 1.0 m/s is constant, then 8.0 meters is traveled in 8.0 seconds. Using Eq. 7-42, and noting that average power is *the* power when the work is being done at a steady rate, we have

$$P = \frac{W}{\Delta t} = \frac{900 \text{ J}}{8.0 \text{ s}} = 1.1 \times 10^2 \text{ W}.$$

(c) Since the speed of 2.0 m/s is constant, 8.0 meters is traveled in 4.0 seconds. Using Eq. 7-42, with *average power* replaced by *power*, we have

$$P = \frac{W}{\Delta t} = \frac{900 \text{ J}}{4.0 \text{ s}} = 225 \text{ W} \approx 2.3 \times 10^2 \text{ W}.$$

47. The total work is the sum of the work done by gravity on the elevator, the work done by gravity on the counterweight, and the work done by the motor on the system:

$$W_T = W_e + W_c + W_s.$$

Since the elevator moves at constant velocity, its kinetic energy does not change and according to the work-kinetic energy theorem the total work done is zero. This means  $W_e + W_c + W_s = 0$ . The elevator moves upward through 54 m, so the work done by gravity on it is

$$W_e = -m_e g d = -(1200 \text{ kg})(9.80 \text{ m/s}^2)(54 \text{ m}) = -6.35 \times 10^5 \text{ J}.$$

The counterweight moves downward the same distance, so the work done by gravity on it is

$$W_c = m_c g d = (950 \text{ kg})(9.80 \text{ m/s}^2)(54 \text{ m}) = 5.03 \times 10^5 \text{ J}.$$

Since  $W_T = 0$ , the work done by the motor on the system is

$$W_s = -W_e - W_c = 6.35 \times 10^5 \text{ J} - 5.03 \times 10^5 \text{ J} = 1.32 \times 10^5 \text{ J}.$$

This work is done in a time interval of  $\Delta t = 3.0 \text{ min} = 180 \text{ s}$ , so the power supplied by the motor to lift the elevator is

$$P = \frac{W_s}{\Delta t} = \frac{1.32 \times 10^5 \text{ J}}{180 \text{ s}} = 7.4 \times 10^2 \text{ W}.$$

48. (a) Using Eq. 7-48 and Eq. 3-23, we obtain

$$P = \vec{F} \cdot \vec{v} = (4.0 \text{ N})(-2.0 \text{ m/s}) + (9.0 \text{ N})(4.0 \text{ m/s}) = 28 \text{ W}.$$

(b) We again use Eq. 7-48 and Eq. 3-23, but with a one-component velocity:  $\vec{v} = v\hat{j}$ .

$$P = \vec{F} \cdot \vec{v} \Rightarrow -12 \text{ W} = (-2.0 \text{ N})v.$$

which yields  $v = 6 \text{ m/s}$ .

49. (a) Eq. 7-8 yields

$$\begin{aligned} W &= F_x \Delta x + F_y \Delta y + F_z \Delta z \\ &= (2.00 \text{ N})(7.5 \text{ m} - 0.50 \text{ m}) + (4.00 \text{ N})(12.0 \text{ m} - 0.75 \text{ m}) + (6.00 \text{ N})(7.2 \text{ m} - 0.20 \text{ m}) \\ &= 101 \text{ J} \approx 1.0 \times 10^2 \text{ J}. \end{aligned}$$

(b) Dividing this result by 12 s (see Eq. 7-42) yields  $P = 8.4 \text{ W}$ .

50. (a) Since the force exerted by the spring on the mass is zero when the mass passes through the equilibrium position of the spring, the rate at which the spring is doing work on the mass at this instant is also zero.

(b) The rate is given by  $P = \vec{F} \cdot \vec{v} = -Fv$ , where the minus sign corresponds to the fact that  $\vec{F}$  and  $\vec{v}$  are anti-parallel to each other. The magnitude of the force is given by

$$F = kx = (500 \text{ N/m})(0.10 \text{ m}) = 50 \text{ N},$$

while  $v$  is obtained from conservation of energy for the spring-mass system:

$$E = K + U = 10 \text{ J} = \frac{1}{2}mv^2 + \frac{1}{2}kx^2 = \frac{1}{2}(0.30 \text{ kg})v^2 + \frac{1}{2}(500 \text{ N/m})(0.10 \text{ m})^2$$

which gives  $v = 7.1 \text{ m/s}$ . Thus,

$$P = -Fv = -(50 \text{ N})(7.1 \text{ m/s}) = -3.5 \times 10^2 \text{ W}.$$

51. (a) The object's displacement is

$$\vec{d} = \vec{d}_f - \vec{d}_i = (-8.00 \text{ m})\hat{i} + (6.00 \text{ m})\hat{j} + (2.00 \text{ m})\hat{k}.$$

Thus, Eq. 7-8 gives

$$W = \vec{F} \cdot \vec{d} = (3.00 \text{ N})(-8.00 \text{ m}) + (7.00 \text{ N})(6.00 \text{ m}) + (7.00 \text{ N})(2.00 \text{ m}) = 32.0 \text{ J}.$$

(b) The average power is given by Eq. 7-42:

$$P_{\text{avg}} = \frac{W}{t} = \frac{32.0}{4.00} = 8.00 \text{ W}.$$

(c) The distance from the coordinate origin to the initial position is

$$d_i = \sqrt{(3.00 \text{ m})^2 + (-2.00 \text{ m})^2 + (5.00 \text{ m})^2} = 6.16 \text{ m},$$

and the magnitude of the distance from the coordinate origin to the final position is

$$d_f = \sqrt{(-5.00 \text{ m})^2 + (4.00 \text{ m})^2 + (7.00 \text{ m})^2} = 9.49 \text{ m}.$$

Their scalar (dot) product is

$$\vec{d}_i \cdot \vec{d}_f = (3.00 \text{ m})(-5.00 \text{ m}) + (-2.00 \text{ m})(4.00 \text{ m}) + (5.00 \text{ m})(7.00 \text{ m}) = 12.0 \text{ m}^2.$$

Thus, the angle between the two vectors is

$$\phi = \cos^{-1} \left( \frac{\vec{d}_i \cdot \vec{d}_f}{d_i d_f} \right) = \cos^{-1} \left( \frac{12.0}{(6.16)(9.49)} \right) = 78.2^\circ.$$

52. According to the problem statement, the power of the car is

$$P = \frac{dW}{dt} = \frac{d}{dt} \left( \frac{1}{2} mv^2 \right) = mv \frac{dv}{dt} = \text{constant}.$$

The condition implies  $dt = mvdv / P$ , which can be integrated to give

$$\int_0^T dt = \int_0^{v_T} \frac{mvdv}{P} \Rightarrow T = \frac{mv_T^2}{2P}$$

where  $v_T$  is the speed of the car at  $t = T$ . On the other hand, the total distance traveled can be written as

$$L = \int_0^T v dt = \int_0^{v_T} v \frac{mvdv}{P} = \frac{m}{P} \int_0^{v_T} v^2 dv = \frac{mv_T^3}{3P}.$$

By squaring the expression for  $L$  and substituting the expression for  $T$ , we obtain

$$L^2 = \left( \frac{mv_T^3}{3P} \right)^2 = \frac{8P}{9m} \left( \frac{mv_T^2}{2P} \right)^3 = \frac{8PT^3}{9m}$$

which implies that

$$PT^3 = \frac{9}{8} mL^2 = \text{constant}.$$

Differentiating the above equation gives  $dPT^3 + 3PT^2 dT = 0$ , or  $dT = -\frac{T}{3P} dP$ .



53. (a) We set up the ratio

$$\frac{50 \text{ km}}{1 \text{ km}} = \left( \frac{E}{1 \text{ megaton}} \right)^{1/3}$$

and find  $E = 50^3 \approx 1 \times 10^5$  megatons of TNT.

(b) We note that 15 kilotons is equivalent to 0.015 megatons. Dividing the result from part (a) by 0.013 yields about ten million bombs.

54. (a) The compression of the spring is  $d = 0.12$  m. The work done by the force of gravity (acting on the block) is, by Eq. 7-12,

$$W_1 = mgd = (0.25 \text{ kg}) (9.8 \text{ m/s}^2) (0.12 \text{ m}) = 0.29 \text{ J}.$$

(b) The work done by the spring is, by Eq. 7-26,

$$W_2 = -\frac{1}{2}kd^2 = -\frac{1}{2} (250 \text{ N/m}) (0.12 \text{ m})^2 = -1.8 \text{ J}.$$

(c) The speed  $v_i$  of the block just before it hits the spring is found from the work-kinetic energy theorem (Eq. 7-15):

$$\Delta K = 0 - \frac{1}{2}mv_i^2 = W_1 + W_2$$

which yields

$$v_i = \sqrt{\frac{(-2)(W_1 + W_2)}{m}} = \sqrt{\frac{(-2)(0.29 \text{ J} - 1.8 \text{ J})}{0.25 \text{ kg}}} = 3.5 \text{ m/s}.$$

(d) If we instead had  $v_i' = 7 \text{ m/s}$ , we reverse the above steps and solve for  $d'$ . Recalling the theorem used in part (c), we have

$$0 - \frac{1}{2}mv_i'^2 = W_1' + W_2' = mgd' - \frac{1}{2}kd'^2$$

which (choosing the positive root) leads to

$$d' = \frac{mg + \sqrt{m^2g^2 + mkv_i'^2}}{k}$$

which yields  $d' = 0.23$  m. In order to obtain this result, we have used more digits in our intermediate results than are shown above (so  $v_i = \sqrt{12.048} \text{ m/s} = 3.471 \text{ m/s}$  and  $v_i' = 6.942 \text{ m/s}$ ).

55. One approach is to assume a “path” from  $\vec{r}_i$  to  $\vec{r}_f$  and do the line-integral accordingly. Another approach is to simply use Eq. 7-36, which we demonstrate:

$$W = \int_{x_i}^{x_f} F_x dx + \int_{y_i}^{y_f} F_y dy = \int_2^{-4} (2x) dx + \int_3^{-3} (3) dy$$

with SI units understood. Thus, we obtain  $W = 12 \text{ J} - 18 \text{ J} = -6 \text{ J}$ .

56. (a) The force of the worker on the crate is constant, so the work it does is given by  $W_F = \vec{F} \cdot \vec{d} = Fd \cos \phi$ , where  $\vec{F}$  is the force,  $\vec{d}$  is the displacement of the crate, and  $\phi$  is the angle between the force and the displacement. Here  $F = 210$  N,  $d = 3.0$  m, and  $\phi = 20^\circ$ . Thus,

$$W_F = (210 \text{ N}) (3.0 \text{ m}) \cos 20^\circ = 590 \text{ J}.$$

(b) The force of gravity is downward, perpendicular to the displacement of the crate. The angle between this force and the displacement is  $90^\circ$  and  $\cos 90^\circ = 0$ , so the work done by the force of gravity is zero.

(c) The normal force of the floor on the crate is also perpendicular to the displacement, so the work done by this force is also zero.

(d) These are the only forces acting on the crate, so the total work done on it is 590 J.

57. There is no acceleration, so the lifting force is equal to the weight of the object. We note that the person's pull  $\vec{F}$  is equal (in magnitude) to the tension in the cord.

(a) As indicated in the *hint*, tension contributes twice to the lifting of the canister:  $2T = mg$ . Since  $|\vec{F}| = T$ , we find  $|\vec{F}| = 98 \text{ N}$ .

(b) To rise  $0.020 \text{ m}$ , two segments of the cord (see Fig. 7-44) must shorten by that amount. Thus, the amount of string pulled down at the left end (this is the magnitude of  $\vec{d}$ , the downward displacement of the hand) is  $d = 0.040 \text{ m}$ .

(c) Since (at the left end) both  $\vec{F}$  and  $\vec{d}$  are downward, then Eq. 7-7 leads to

$$W = \vec{F} \cdot \vec{d} = (98 \text{ N})(0.040 \text{ m}) = 3.9 \text{ J}.$$

(d) Since the force of gravity  $\vec{F}_g$  (with magnitude  $mg$ ) is opposite to the displacement  $\vec{d}_c = 0.020 \text{ m}$  (up) of the canister, Eq. 7-7 leads to

$$W = \vec{F}_g \cdot \vec{d}_c = - (196 \text{ N})(0.020 \text{ m}) = -3.9 \text{ J}.$$

This is consistent with Eq. 7-15 since there is no change in kinetic energy.

58. With SI units understood, Eq. 7-8 leads to  $W = (4.0)(3.0) - c(2.0) = 12 - 2c$ .

(a) If  $W = 0$ , then  $c = 6.0$  N.

(b) If  $W = 17$  J, then  $c = -2.5$  N.

(c) If  $W = -18$  J, then  $c = 15$  N.

59. Using Eq. 7-8, we find

$$W = \vec{F} \cdot \vec{d} = (F \cos \theta \hat{i} + F \sin \theta \hat{j}) \cdot (x \hat{i} + y \hat{j}) = Fx \cos \theta + Fy \sin \theta$$

where  $x = 2.0$  m,  $y = -4.0$  m,  $F = 10$  N, and  $\theta = 150^\circ$ . Thus, we obtain  $W = -37$  J. Note that the given mass value (2.0 kg) is not used in the computation.

60. The acceleration is constant, so we may use the equations in Table 2-1. We choose the direction of motion as  $+x$  and note that the displacement is the same as the distance traveled, in this problem. We designate the force (assumed singular) along the  $x$  direction acting on the  $m = 2.0$  kg object as  $F$ .

(a) With  $v_0 = 0$ , Eq. 2-11 leads to  $a = v/t$ . And Eq. 2-17 gives  $\Delta x = \frac{1}{2}vt$ . Newton's second law yields the force  $F = ma$ . Eq. 7-8, then, gives the work:

$$W = F\Delta x = m\left(\frac{v}{t}\right)\left(\frac{1}{2}vt\right) = \frac{1}{2}mv^2$$

as we expect from the work-kinetic energy theorem. With  $v = 10$  m/s, this yields  $W = 1.0 \times 10^2$  J.

(b) Instantaneous power is defined in Eq. 7-48. With  $t = 3.0$  s, we find

$$P = Fv = m\left(\frac{v}{t}\right)v = 67 \text{ W}.$$

(c) The velocity at  $t' = 1.5$  s is  $v' = at' = 5.0$  m/s. Thus,  $P' = Fv' = 33$  W.



61. The total weight is  $(100)(660 \text{ N}) = 6.60 \times 10^4 \text{ N}$ , and the words “raises ... at constant speed” imply zero acceleration, so the lift-force is equal to the total weight. Thus

$$P = Fv = (6.60 \times 10^4)(150 \text{ m}/60.0 \text{ s}) = 1.65 \times 10^5 \text{ W}.$$

62. (a) The force  $\vec{F}$  of the incline is a combination of normal and friction force which is serving to “cancel” the tendency of the box to fall downward (due to its 19.6 N weight). Thus,  $\vec{F} = mg$  upward. In this part of the problem, the angle  $\phi$  between the belt and  $\vec{F}$  is  $80^\circ$ . From Eq. 7-47, we have

$$P = Fv \cos \phi = (19.6 \text{ N})(0.50 \text{ m/s}) \cos 80^\circ = 1.7 \text{ W}.$$

(b) Now the angle between the belt and  $\vec{F}$  is  $90^\circ$ , so that  $P = 0$ .

(c) In this part, the angle between the belt and  $\vec{F}$  is  $100^\circ$ , so that

$$P = (19.6 \text{ N})(0.50 \text{ m/s}) \cos 100^\circ = -1.7 \text{ W}.$$

63. (a) In 10 min the cart moves

$$d = \left( 6.0 \frac{\text{mi}}{\text{h}} \right) \left( \frac{5280 \text{ ft/mi}}{60 \text{ min/h}} \right) (10 \text{ min}) = 5280 \text{ ft}$$

so that Eq. 7-7 yields

$$W = Fd \cos \phi = (40 \text{ lb})(5280 \text{ ft}) \cos 30^\circ = 1.8 \times 10^5 \text{ ft} \cdot \text{lb}.$$

(b) The average power is given by Eq. 7-42, and the conversion to horsepower (hp) can be found on the inside back cover. We note that 10 min is equivalent to 600 s.

$$P_{\text{avg}} = \frac{1.8 \times 10^5 \text{ ft} \cdot \text{lb}}{600 \text{ s}} = 305 \text{ ft} \cdot \text{lb/s}$$

which (upon dividing by 550) converts to  $P_{\text{avg}} = 0.55 \text{ hp}$ .

64. Using Eq. 7-7, we have  $W = Fd \cos \phi = 1504 \text{ J}$ . Then, by the work-kinetic energy theorem, we find the kinetic energy  $K_f = K_i + W = 0 + 1504 \text{ J}$ . The answer is therefore 1.5 kJ.

65. (a) To hold the crate at equilibrium in the final situation,  $\vec{F}$  must have the same magnitude as the horizontal component of the rope's tension  $T \sin \theta$ , where  $\theta$  is the angle between the rope (in the final position) and vertical:

$$\theta = \sin^{-1}\left(\frac{4.00}{12.0}\right) = 19.5^\circ.$$

But the vertical component of the tension supports against the weight:  $T \cos \theta = mg$ . Thus, the tension is

$$T = (230 \text{ kg})(9.80 \text{ m/s}^2)/\cos 19.5^\circ = 2391 \text{ N}$$

and  $F = (2391 \text{ N}) \sin 19.5^\circ = 797 \text{ N}$ .

An alternative approach based on drawing a vector triangle (of forces) in the final situation provides a quick solution.

(b) Since there is no change in kinetic energy, the net work on it is zero.

(c) The work done by gravity is  $W_g = \vec{F}_g \cdot \vec{d} = -mgh$ , where  $h = L(1 - \cos \theta)$  is the vertical component of the displacement. With  $L = 12.0 \text{ m}$ , we obtain  $W_g = -1547 \text{ J}$  which should be rounded to three figures:  $-1.55 \text{ kJ}$ .

(d) The tension vector is everywhere perpendicular to the direction of motion, so its work is zero (since  $\cos 90^\circ = 0$ ).

(e) The implication of the previous three parts is that the work due to  $\vec{F}$  is  $-W_g$  (so the net work turns out to be zero). Thus,  $W_F = -W_g = 1.55 \text{ kJ}$ .

(f) Since  $\vec{F}$  does not have constant magnitude, we cannot expect Eq. 7-8 to apply.

66. From Eq. 7-32, we see that the “area” in the graph is equivalent to the work done. We find the area in terms of rectangular [length  $\times$  width] and triangular [ $\frac{1}{2}$  base  $\times$  height] areas and use the work-kinetic energy theorem appropriately. The initial point is taken to be  $x = 0$ , where  $v_0 = 4.0$  m/s.

(a) With  $K_i = \frac{1}{2}mv_0^2 = 16$  J, we have

$$K_3 - K_0 = W_{0 < x < 1} + W_{1 < x < 2} + W_{2 < x < 3} = -4.0 \text{ J}$$

so that  $K_3$  (the kinetic energy when  $x = 3.0$  m) is found to equal 12 J.

(b) With SI units understood, we write  $W_{3 < x < x_f}$  as  $F_x \Delta x = (-4.0 \text{ N})(x_f - 3.0 \text{ m})$  and apply the work-kinetic energy theorem:

$$\begin{aligned} K_{x_f} - K_3 &= W_{3 < x < x_f} \\ K_{x_f} - 12 &= (-4)(x_f - 3.0) \end{aligned}$$

so that the requirement  $K_{x_f} = 8.0$  J leads to  $x_f = 4.0$  m.

(c) As long as the work is positive, the kinetic energy grows. The graph shows this situation to hold until  $x = 1.0$  m. At that location, the kinetic energy is

$$K_1 = K_0 + W_{0 < x < 1} = 16 \text{ J} + 2.0 \text{ J} = 18 \text{ J}.$$

67. (a) Noting that the  $x$  component of the third force is  $F_{3x} = (4.00 \text{ N})\cos(60^\circ)$ , we apply Eq. 7-8 to the problem:

$$W = [5.00 \text{ N} - 1.00 \text{ N} + (4.00 \text{ N})\cos 60^\circ](0.20 \text{ m}) = 1.20 \text{ J}.$$

(b) Eq. 7-10 (along with Eq. 7-1) then yields  $v = \sqrt{2W/m} = 1.10 \text{ m/s}$ .

68. (a) In the work-kinetic energy theorem, we include both the work due to an applied force  $W_a$  and work done by gravity  $W_g$  in order to find the latter quantity.

$$\Delta K = W_a + W_g \Rightarrow 30 \text{ J} = (100 \text{ N})(1.8 \text{ m})\cos 180^\circ + W_g$$

leading to  $W_g = 2.1 \times 10^2 \text{ J}$ .

(b) The value of  $W_g$  obtained in part (a) still applies since the weight and the path of the child remain the same, so  $\Delta K = W_g = 2.1 \times 10^2 \text{ J}$ .



69. (a) Eq. 7-6 gives  $W_a = Fd = (209 \text{ N})(1.50 \text{ m}) \approx 314 \text{ J}$ .

(b) Eq. 7-12 leads to  $W_g = (25.0 \text{ kg})(9.80 \text{ m/s}^2)(1.50 \text{ m})\cos(115^\circ) \approx -155 \text{ J}$ .

(c) The angle between the normal force and the direction of motion remains  $90^\circ$  at all times, so the work it does is zero.

(d) The total work done on the crate is  $W_T = 314 \text{ J} - 155 \text{ J} = 158 \text{ J}$ .

70. After converting the speed to meters-per-second, we find

$$K = \frac{1}{2}mv^2 = 667 \text{ kJ.}$$

71. (a) Hooke's law and the work done by a spring is discussed in the chapter. Taking absolute values, and writing that law in terms of differences  $\Delta F$  and  $\Delta x$ , we analyze the first two pictures as follows:

$$\begin{aligned} |\Delta F| &= k|\Delta x| \\ 240 \text{ N} - 110 \text{ N} &= k(60 \text{ mm} - 40 \text{ mm}) \end{aligned}$$

which yields  $k = 6.5 \text{ N/mm}$ . Designating the relaxed position (as read by that scale) as  $x_0$  we look again at the first picture:

$$110 \text{ N} = k(40 \text{ mm} - x_0)$$

which (upon using the above result for  $k$ ) yields  $x_0 = 23 \text{ mm}$ .

(b) Using the results from part (a) to analyze that last picture, we find

$$W = k(30 \text{ mm} - x_0) = 45 \text{ N} \cdot \text{m}$$

72. (a) Using Eq. 7-8 and SI units, we find

$$W = \vec{F} \cdot \vec{d} = (2\hat{i} - 4\hat{j}) \cdot (8\hat{i} + c\hat{j}) = 16 - 4c$$

which, if equal zero, implies  $c = 16/4 = 4$  m.

(b) If  $W > 0$  then  $16 > 4c$ , which implies  $c < 4$  m.

(c) If  $W < 0$  then  $16 < 4c$ , which implies  $c > 4$  m.

73. A convenient approach is provided by Eq. 7-48.

$$P = F v = (1800 \text{ kg} + 4500 \text{ kg})(9.8 \text{ m/s}^2)(3.80 \text{ m/s}) = 235 \text{ kW}.$$

Note that we have set the applied force equal to the weight in order to maintain constant velocity (zero acceleration).

74. (a) The component of the force of gravity exerted on the ice block (of mass  $m$ ) along the incline is  $mg \sin \theta$ , where  $\theta = \sin^{-1}(0.91/1.5)$  gives the angle of inclination for the inclined plane. Since the ice block slides down with uniform velocity, the worker must exert a force  $\vec{F}$  “uphill” with a magnitude equal to  $mg \sin \theta$ . Consequently,

$$F = mg \sin \theta = (45 \text{ kg})(9.8 \text{ m/s}^2) \left( \frac{0.91 \text{ m}}{1.5 \text{ m}} \right) = 2.7 \times 10^2 \text{ N}.$$

(b) Since the “downhill” displacement is opposite to  $\vec{F}$ , the work done by the worker is

$$W_1 = -(2.7 \times 10^2 \text{ N})(1.5 \text{ m}) = -4.0 \times 10^2 \text{ J}.$$


(c) Since the displacement has a vertically downward component of magnitude 0.91 m (in the same direction as the force of gravity), we find the work done by gravity to be

$$W_2 = (45 \text{ kg})(9.8 \text{ m/s}^2)(0.91 \text{ m}) = 4.0 \times 10^2 \text{ J}.$$

(d) Since  $\vec{F}_N$  is perpendicular to the direction of motion of the block, and  $\cos 90^\circ = 0$ , work done by the normal force is  $W_3 = 0$  by Eq. 7-7.

(e) The resultant force  $\vec{F}_{\text{net}}$  is zero since there is no acceleration. Thus, its work is zero, as can be checked by adding the above results  $W_1 + W_2 + W_3 = 0$ .

75. (a) The plot of the function (with SI units understood) is shown below.

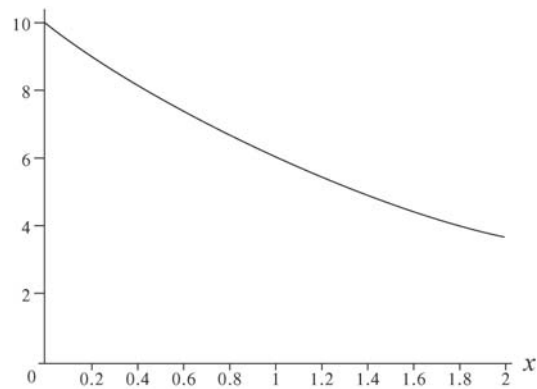

Estimating the area under the curve allows for a range of answers. Estimates from 11 J to 14 J are typical.

(b) Evaluating the work analytically (using Eq. 7-32), we have

$$W = \int_0^2 10e^{-x/2} dx = -20e^{-x/2} \Big|_0^2 = 12.6 \text{ J} \approx 13 \text{ J}.$$

76. (a) Eq. 7-10 (along with Eq. 7-1 and Eq. 7-7) leads to

$$v_f = \left(2 \frac{d}{m} F \cos \theta\right)^{1/2} = (\cos \theta)^{1/2},$$


where we have substituted  $F = 2.0 \text{ N}$ ,  $m = 4.0 \text{ kg}$  and  $d = 1.0 \text{ m}$ .

(b) With  $v_i = 1$ , those same steps lead to  $v_f = (1 + \cos \theta)^{1/2}$ .

(c) Replacing  $\theta$  with  $180^\circ - \theta$ , and still using  $v_i = 1$ , we find

$$v_f = [1 + \cos(180^\circ - \theta)]^{1/2} = (1 - \cos \theta)^{1/2}.$$

(d) The graphs are shown on the right. Note that as  $\theta$  is increased in parts (a) and (b) the force provides less and less of a positive acceleration, whereas in part (c) the force provides less and less of a deceleration (as its  $\theta$  value increases). The highest curve (which slowly decreases from 1.4 to 1) is the curve for part (b); the other decreasing curve (starting at 1 and ending at 0) is for part (a). The rising curve is for part (c); it is equal to 1 where  $\theta = 90^\circ$ .

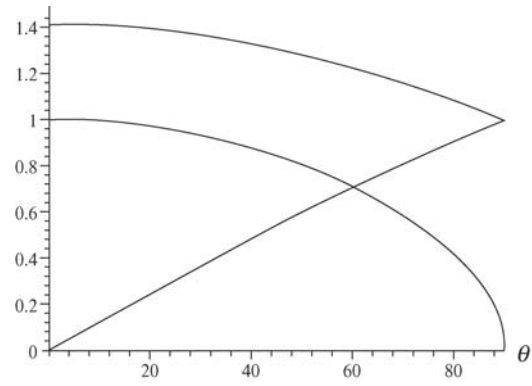



77. (a) We can easily fit the curve to a concave-downward parabola:  $x = \frac{1}{10}t(10 - t)$ , from which (by taking two derivatives) we find the acceleration to be  $a = -0.20 \text{ m/s}^2$ . The (constant) force is therefore  $F = ma = -0.40 \text{ N}$ , with a corresponding work given by  $W = Fx = \frac{2}{50}t(t - 10)$ . It also follows from the  $x$  expression that  $v_0 = 1.0 \text{ m/s}$ . This means that  $K_i = \frac{1}{2}mv^2 = 1.0 \text{ J}$ . Therefore, when  $t = 1.0 \text{ s}$ , Eq. 7-10 gives  $K = K_i + W = 0.64 \text{ J} \approx 0.6 \text{ J}$ , where the second significant figure is not to be taken too seriously.

(b) At  $t = 5.0 \text{ s}$ , the above method gives  $K = 0$ .

(c) Evaluating the  $W = \frac{2}{50}t(t - 10)$  expression at  $t = 5.0 \text{ s}$  and  $t = 1.0 \text{ s}$ , and subtracting, yields  $-0.6 \text{ J}$ . This can also be inferred from the answers for parts (a) and (b).

78. The problem indicates that SI units are understood, so the result (of Eq. 7-23) is in Joules. Done numerically, using features available on many modern calculators, the result is roughly 0.47 J. For the interested student it might be worthwhile to quote the “exact” answer (in terms of the “error function”):

$$\int_{.15}^{1.2} e^{-2x^2} dx = \frac{1}{4} \sqrt{2\pi} [\operatorname{erf}(6\sqrt{2}/5) - \operatorname{erf}(3\sqrt{2}/20)] .$$


79. (a) To estimate the area under the curve between  $x = 1$  m and  $x = 3$  m (which should yield the value for the work done), one can try “counting squares” (or half-squares or thirds of squares) between the curve and the axis. Estimates between 5 J and 8 J are typical for this (crude) procedure.

(b) Eq. 7-32 gives

$$\int_1^3 \frac{a}{x^2} dx = \frac{a}{3} - \frac{a}{1} = 6 \text{ J}$$

where  $a = -9 \text{ N}\cdot\text{m}^2$  is given in the problem statement.

80. (a) Using Eq. 7-32, the work becomes  $W = \frac{9}{2}x^2 - x^3$  (SI units understood). The plot is shown below:

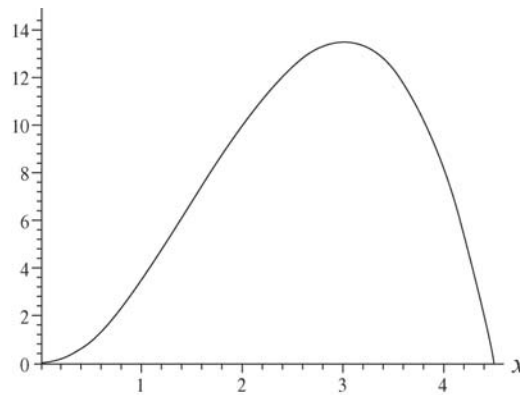

(b) We see from the graph that its peak value occurs at  $x = 3.00$  m. This can be verified by taking the derivative of  $W$  and setting equal to zero, or simply by noting that this is where the force vanishes.

(c) The maximum value is  $W = \frac{9}{2}(3.00)^2 - (3.00)^3 = 13.50$  J.

(d) We see from the graph (or from our analytic expression) that  $W = 0$  at  $x = 4.50$  m.

(e) The case is at rest when  $v = 0$ . Since  $W = \Delta K = mv^2 / 2$ , the condition implies  $W = 0$ . This happens at  $x = 4.50$  m.

1. (a) Noting that the vertical displacement is  $10.0 \text{ m} - 1.50 \text{ m} = 8.50 \text{ m}$  downward (same direction as  $\vec{F}_g$ ), Eq. 7-12 yields

$$W_g = mgd \cos \phi = (2.00 \text{ kg})(9.80 \text{ m/s}^2)(8.50 \text{ m}) \cos 0^\circ = 167 \text{ J}.$$

(b) One approach (which is fairly trivial) is to use Eq. 8-1, but we feel it is instructive to instead calculate this as  $\Delta U$  where  $U = mgy$  (with upwards understood to be the  $+y$  direction). The result is

$$\Delta U = mg(y_f - y_i) = (2.00 \text{ kg})(9.80 \text{ m/s}^2)(1.50 \text{ m} - 10.0 \text{ m}) = -167 \text{ J}.$$

(c) In part (b) we used the fact that  $U_i = mgy_i = 196 \text{ J}$ .

(d) In part (b), we also used the fact  $U_f = mgy_f = 29 \text{ J}$ .

(e) The computation of  $W_g$  does not use the new information (that  $U = 100 \text{ J}$  at the ground), so we again obtain  $W_g = 167 \text{ J}$ .

(f) As a result of Eq. 8-1, we must again find  $\Delta U = -W_g = -167 \text{ J}$ .

(g) With this new information (that  $U_0 = 100 \text{ J}$  where  $y = 0$ ) we have

$$U_i = mgy_i + U_0 = 296 \text{ J}.$$

(h) With this new information (that  $U_0 = 100 \text{ J}$  where  $y = 0$ ) we have

$$U_f = mgy_f + U_0 = 129 \text{ J}.$$

We can check part (f) by subtracting the new  $U_i$  from this result.

2. (a) The only force that does work on the ball is the force of gravity; the force of the rod is perpendicular to the path of the ball and so does no work. In going from its initial position to the lowest point on its path, the ball moves vertically through a distance equal to the length  $L$  of the rod, so the work done by the force of gravity is

$$W = mgL = (0.341 \text{ kg})(9.80 \text{ m/s}^2)(0.452 \text{ m}) = 1.51 \text{ J}.$$

(b) In going from its initial position to the highest point on its path, the ball moves vertically through a distance equal to  $L$ , but this time the displacement is upward, opposite the direction of the force of gravity. The work done by the force of gravity is

$$W = -mgL = -(0.341 \text{ kg})(9.80 \text{ m/s}^2)(0.452 \text{ m}) = -1.51 \text{ J}.$$

(c) The final position of the ball is at the same height as its initial position. The displacement is horizontal, perpendicular to the force of gravity. The force of gravity does no work during this displacement.

(d) The force of gravity is conservative. The change in the gravitational potential energy of the ball-Earth system is the negative of the work done by gravity:

$$\Delta U = -mgL = -(0.341 \text{ kg})(9.80 \text{ m/s}^2)(0.452 \text{ m}) = -1.51 \text{ J}$$

as the ball goes to the lowest point.

(e) Continuing this line of reasoning, we find

$$\Delta U = +mgL = (0.341 \text{ kg})(9.80 \text{ m/s}^2)(0.452 \text{ m}) = 1.51 \text{ J}$$

as it goes to the highest point.

(f) Continuing this line of reasoning, we have  $\Delta U = 0$  as it goes to the point at the same height.

(g) The change in the gravitational potential energy depends only on the initial and final positions of the ball, not on its speed anywhere. The change in the potential energy is the *same* since the initial and final positions are the same.

3. (a) The force of gravity is constant, so the work it does is given by  $W = \vec{F} \cdot \vec{d}$ , where  $\vec{F}$  is the force and  $\vec{d}$  is the displacement. The force is vertically downward and has magnitude  $mg$ , where  $m$  is the mass of the flake, so this reduces to  $W = mgh$ , where  $h$  is the height from which the flake falls. This is equal to the radius  $r$  of the bowl. Thus

$$W = mgr = (2.00 \times 10^{-3} \text{ kg})(9.8 \text{ m/s}^2)(22.0 \times 10^{-2} \text{ m}) = 4.31 \times 10^{-3} \text{ J}.$$

(b) The force of gravity is conservative, so the change in gravitational potential energy of the flake-Earth system is the negative of the work done:  $\Delta U = -W = -4.31 \times 10^{-3} \text{ J}$ .

(c) The potential energy when the flake is at the top is greater than when it is at the bottom by  $|\Delta U|$ . If  $U = 0$  at the bottom, then  $U = +4.31 \times 10^{-3} \text{ J}$  at the top.

(d) If  $U = 0$  at the top, then  $U = -4.31 \times 10^{-3} \text{ J}$  at the bottom.

(e) All the answers are proportional to the mass of the flake. If the mass is doubled, all answers are doubled.

4. We use Eq. 7-12 for  $W_g$  and Eq. 8-9 for  $U$ .

(a) The displacement between the initial point and  $A$  is horizontal, so  $\phi = 90.0^\circ$  and  $W_g = 0$  (since  $\cos 90.0^\circ = 0$ ).

(b) The displacement between the initial point and  $B$  has a vertical component of  $h/2$  downward (same direction as  $\vec{F}_g$ ), so we obtain

$$W_g = \vec{F}_g \cdot \vec{d} = \frac{1}{2} mgh = \frac{1}{2} (825 \text{ kg})(9.80 \text{ m/s}^2)(42.0 \text{ m}) = 1.70 \times 10^5 \text{ J}.$$

(c) The displacement between the initial point and  $C$  has a vertical component of  $h$  downward (same direction as  $\vec{F}_g$ ), so we obtain

$$W_g = \vec{F}_g \cdot \vec{d} = mgh = (825 \text{ kg})(9.80 \text{ m/s}^2)(42.0 \text{ m}) = 3.40 \times 10^5 \text{ J}.$$

(d) With the reference position at  $C$ , we obtain

$$U_B = \frac{1}{2} mgh = \frac{1}{2} (825 \text{ kg})(9.80 \text{ m/s}^2)(42.0 \text{ m}) = 1.70 \times 10^5 \text{ J}$$

(e) Similarly, we find

$$U_A = mgh = (825 \text{ kg})(9.80 \text{ m/s}^2)(42.0 \text{ m}) = 3.40 \times 10^5 \text{ J}$$

(f) All the answers are proportional to the mass of the object. If the mass is doubled, all answers are doubled.



5. The potential energy stored by the spring is given by  $U = \frac{1}{2} kx^2$ , where  $k$  is the spring constant and  $x$  is the displacement of the end of the spring from its position when the spring is in equilibrium. Thus

$$k = \frac{2U}{x^2} = \frac{2(25\text{J})}{(0.075\text{m})^2} = 8.9 \times 10^3 \text{ N/m}.$$

6. (a) The force of gravity is constant, so the work it does is given by  $W = \vec{F} \cdot \vec{d}$ , where  $\vec{F}$  is the force and  $\vec{d}$  is the displacement. The force is vertically downward and has magnitude  $mg$ , where  $m$  is the mass of the snowball. The expression for the work reduces to  $W = mgh$ , where  $h$  is the height through which the snowball drops. Thus

$$W = mgh = (1.50 \text{ kg})(9.80 \text{ m/s}^2)(12.5 \text{ m}) = 184 \text{ J}.$$

(b) The force of gravity is conservative, so the change in the potential energy of the snowball-Earth system is the negative of the work it does:  $\Delta U = -W = -184 \text{ J}$ .

(c) The potential energy when it reaches the ground is less than the potential energy when it is fired by  $|\Delta U|$ , so  $U = -184 \text{ J}$  when the snowball hits the ground.

7. The main challenge for students in this type of problem seems to be working out the trigonometry in order to obtain the height of the ball (relative to the low point of the swing)  $h = L - L \cos \theta$  (for angle  $\theta$  measured from vertical as shown in Fig. 8-34). Once this relation (which we will not derive here since we have found this to be most easily illustrated at the blackboard) is established, then the principal results of this problem follow from Eq. 7-12 (for  $W_g$ ) and Eq. 8-9 (for  $U$ ).

(a) The vertical component of the displacement vector is downward with magnitude  $h$ , so we obtain

$$\begin{aligned} W_g &= \vec{F}_g \cdot \vec{d} = mgh = mgL(1 - \cos \theta) \\ &= (5.00 \text{ kg})(9.80 \text{ m/s}^2)(2.00 \text{ m})(1 - \cos 30^\circ) = 13.1 \text{ J} \end{aligned}$$

(b) From Eq. 8-1, we have  $\Delta U = -W_g = -mgL(1 - \cos \theta) = -13.1 \text{ J}$ .

(c) With  $y = h$ , Eq. 8-9 yields  $U = mgL(1 - \cos \theta) = 13.1 \text{ J}$ .

(d) As the angle increases, we intuitively see that the height  $h$  increases (and, less obviously, from the mathematics, we see that  $\cos \theta$  decreases so that  $1 - \cos \theta$  increases), so the answers to parts (a) and (c) increase, and the absolute value of the answer to part (b) also increases.

8. We use Eq. 7-12 for  $W_g$  and Eq. 8-9 for  $U$ .

(a) The displacement between the initial point and  $Q$  has a vertical component of  $h - R$  downward (same direction as  $\vec{F}_g$ ), so (with  $h = 5R$ ) we obtain

$$W_g = \vec{F}_g \cdot \vec{d} = 4mgR = 4(3.20 \times 10^{-2} \text{ kg})(9.80 \text{ m/s}^2)(0.12 \text{ m}) = 0.15 \text{ J}.$$

(b) The displacement between the initial point and the top of the loop has a vertical component of  $h - 2R$  downward (same direction as  $\vec{F}_g$ ), so (with  $h = 5R$ ) we obtain

$$W_g = \vec{F}_g \cdot \vec{d} = 3mgR = 3(3.20 \times 10^{-2} \text{ kg})(9.80 \text{ m/s}^2)(0.12 \text{ m}) = 0.11 \text{ J}.$$

(c) With  $y = h = 5R$ , at  $P$  we find

$$U = 5mgR = 5(3.20 \times 10^{-2} \text{ kg})(9.80 \text{ m/s}^2)(0.12 \text{ m}) = 0.19 \text{ J}.$$

(d) With  $y = R$ , at  $Q$  we have

$$U = mgR = (3.20 \times 10^{-2} \text{ kg})(9.80 \text{ m/s}^2)(0.12 \text{ m}) = 0.038 \text{ J}$$

(e) With  $y = 2R$ , at the top of the loop, we find

$$U = 2mgR = 2(3.20 \times 10^{-2} \text{ kg})(9.80 \text{ m/s}^2)(0.12 \text{ m}) = 0.075 \text{ J}$$

(f) The new information ( $v_i \neq 0$ ) is not involved in any of the preceding computations; the above results are unchanged.

9. We neglect any work done by friction. We work with SI units, so the speed is converted:  $v = 130(1000/3600) = 36.1$  m/s.

(a) We use Eq. 8-17:  $K_f + U_f = K_i + U_i$  with  $U_i = 0$ ,  $U_f = mgh$  and  $K_f = 0$ . Since  $K_i = \frac{1}{2}mv^2$ , where  $v$  is the initial speed of the truck, we obtain

$$\frac{1}{2}mv^2 = mgh \Rightarrow h = \frac{v^2}{2g} = \frac{(36.1 \text{ m/s})^2}{2(9.8 \text{ m/s}^2)} = 66.5 \text{ m}.$$

If  $L$  is the length of the ramp, then  $L \sin 15^\circ = 66.5$  m so that  $L = (66.5 \text{ m})/\sin 15^\circ = 257$  m. Therefore, the ramp must be about  $2.6 \times 10^2$  m long if friction is negligible.

(b) The answers do not depend on the mass of the truck. They remain the same if the mass is reduced.

(c) If the speed is decreased,  $h$  and  $L$  both decrease (note that  $h$  is proportional to the square of the speed and that  $L$  is proportional to  $h$ ).

10. We use Eq. 8-17, representing the conservation of mechanical energy (which neglects friction and other dissipative effects).

(a) In the solution to exercise 2 (to which this problem refers), we found  $U_i = mgy_i = 196\text{ J}$  and  $U_f = mgy_f = 29.0\text{ J}$  (assuming the reference position is at the ground). Since  $K_i = 0$  in this case, we have

$$0 + 196\text{ J} = K_f + 29.0\text{ J}$$

which gives  $K_f = 167\text{ J}$  and thus leads to

$$v = \sqrt{\frac{2K_f}{m}} = \sqrt{\frac{2(167\text{ J})}{2.00\text{ kg}}} = 12.9\text{ m/s}.$$

(b) If we proceed algebraically through the calculation in part (a), we find  $K_f = -\Delta U = mgh$  where  $h = y_i - y_f$  and is positive-valued. Thus,

$$v = \sqrt{\frac{2K_f}{m}} = \sqrt{2gh}$$

as we might also have derived from the equations of Table 2-1 (particularly Eq. 2-16). The fact that the answer is independent of mass means that the answer to part (b) is identical to that of part (a), i.e.,  $v = 12.9\text{ m/s}$ .

(c) If  $K_i \neq 0$ , then we find  $K_f = mgh + K_i$  (where  $K_i$  is necessarily positive-valued). This represents a larger value for  $K_f$  than in the previous parts, and thus leads to a larger value for  $v$ .

11. (a) If  $K_i$  is the kinetic energy of the flake at the edge of the bowl,  $K_f$  is its kinetic energy at the bottom,  $U_i$  is the gravitational potential energy of the flake-Earth system with the flake at the top, and  $U_f$  is the gravitational potential energy with it at the bottom, then  $K_f + U_f = K_i + U_i$ .

Taking the potential energy to be zero at the bottom of the bowl, then the potential energy at the top is  $U_i = mgr$  where  $r = 0.220$  m is the radius of the bowl and  $m$  is the mass of the flake.  $K_i = 0$  since the flake starts from rest. Since the problem asks for the speed at the bottom, we write  $\frac{1}{2}mv^2$  for  $K_f$ . Energy conservation leads to

$$W_g = \vec{F}_g \cdot \vec{d} = mgh = mgL(1 - \cos\theta) .$$

The speed is  $v = \sqrt{2gr} = 2.08$  m/s .

(b) Since the expression for speed does not contain the mass of the flake, the speed would be the same, 2.08 m/s, regardless of the mass of the flake.

(c) The final kinetic energy is given by  $K_f = K_i + U_i - U_f$ . Since  $K_i$  is greater than before,  $K_f$  is greater. This means the final speed of the flake is greater.

12. We use Eq. 8-18, representing the conservation of mechanical energy (which neglects friction and other dissipative effects).

(a) In the solution to Problem 4 we found  $\Delta U = mgL$  as it goes to the highest point. Thus, we have

$$\begin{aligned}\Delta K + \Delta U &= 0 \\ K_{\text{top}} - K_0 + mgL &= 0\end{aligned}$$

which, upon requiring  $K_{\text{top}} = 0$ , gives  $K_0 = mgL$  and thus leads to

$$v_0 = \sqrt{\frac{2K_0}{m}} = \sqrt{2gL} = \sqrt{2(9.80 \text{ m/s}^2)(0.452 \text{ m})} = 2.98 \text{ m/s}.$$

(b) We also found in the Problem 4 that the potential energy change is  $\Delta U = -mgL$  in going from the initial point to the lowest point (the bottom). Thus,

$$\begin{aligned}\Delta K + \Delta U &= 0 \\ K_{\text{bottom}} - K_0 - mgL &= 0\end{aligned}$$

which, with  $K_0 = mgL$ , leads to  $K_{\text{bottom}} = 2mgL$ . Therefore,

$$v_{\text{bottom}} = \sqrt{\frac{2K_{\text{bottom}}}{m}} = \sqrt{4gL} = \sqrt{4(9.80 \text{ m/s}^2)(0.452 \text{ m})} = 4.21 \text{ m/s}.$$

(c) Since there is no change in height (going from initial point to the rightmost point), then  $\Delta U = 0$ , which implies  $\Delta K = 0$ . Consequently, the speed is the same as what it was initially,

$$v_{\text{right}} = v_0 = 2.98 \text{ m/s}.$$

(d) It is evident from the above manipulations that the results do not depend on mass. Thus, a different mass for the ball must lead to the same results.



13. We use Eq. 8-17, representing the conservation of mechanical energy (which neglects friction and other dissipative effects).

(a) In Problem 4, we found  $U_A = mgh$  (with the reference position at  $C$ ). Referring again to Fig. 8-33, we see that this is the same as  $U_0$  which implies that  $K_A = K_0$  and thus that

$$v_A = v_0 = 17.0 \text{ m/s.}$$

(b) In the solution to Problem 4, we also found  $U_B = mgh/2$ . In this case, we have

$$\begin{aligned} K_0 + U_0 &= K_B + U_B \\ \frac{1}{2}mv_0^2 + mgh &= \frac{1}{2}mv_B^2 + mg\left(\frac{h}{2}\right) \end{aligned}$$

which leads to

$$v_B = \sqrt{v_0^2 + gh} = \sqrt{(17.0 \text{ m/s})^2 + (9.80 \text{ m/s}^2)(42.0 \text{ m})} = 26.5 \text{ m/s.}$$

(c) Similarly,

$$v_C = \sqrt{v_0^2 + 2gh} = \sqrt{(17.0 \text{ m/s})^2 + 2(9.80 \text{ m/s}^2)(42.0 \text{ m})} = 33.4 \text{ m/s.}$$

(d) To find the “final” height, we set  $K_f = 0$ . In this case, we have

$$\begin{aligned} K_0 + U_0 &= K_f + U_f \\ \frac{1}{2}mv_0^2 + mgh &= 0 + mgh_f \end{aligned}$$

$$\text{which yields } h_f = h + \frac{v_0^2}{2g} = 42.0 \text{ m} + \frac{(17.0 \text{ m/s})^2}{2(9.80 \text{ m/s}^2)} = 56.7 \text{ m.}$$

(e) It is evident that the above results do not depend on mass. Thus, a different mass for the coaster must lead to the same results.

14. We use Eq. 8-18, representing the conservation of mechanical energy. We choose the reference position for computing  $U$  to be at the ground below the cliff; it is also regarded as the “final” position in our calculations.

(a) Using Eq. 8-9, the initial potential energy is given by  $U_i = mgh$  where  $h = 12.5$  m and  $m = 1.50$  kg. Thus, we have

$$K_i + U_i = K_f + U_f$$

$$\frac{1}{2}mv_i^2 + mgh = \frac{1}{2}mv^2 + 0$$

which leads to the speed of the snowball at the instant before striking the ground:

$$v = \sqrt{\frac{2}{m} \left( \frac{1}{2}mv_i^2 + mgh \right)} = \sqrt{v_i^2 + 2gh}$$

where  $v_i = 14.0$  m/s is the magnitude of its initial velocity (not just one component of it). Thus we find  $v = 21.0$  m/s.

(b) As noted above,  $v_i$  is the magnitude of its initial velocity and not just one component of it; therefore, there is no dependence on launch angle. The answer is again 21.0 m/s.

(c) It is evident that the result for  $v$  in part (a) does not depend on mass. Thus, changing the mass of the snowball does not change the result for  $v$ .

15. We take the reference point for gravitational potential energy at the position of the marble when the spring is compressed.

(a) The gravitational potential energy when the marble is at the top of its motion is  $U_g = mgh$ , where  $h = 20$  m is the height of the highest point. Thus,

$$U_g = (5.0 \times 10^{-3} \text{ kg})(9.8 \text{ m/s}^2)(20 \text{ m}) = 0.98 \text{ J}.$$

(b) Since the kinetic energy is zero at the release point and at the highest point, then conservation of mechanical energy implies  $\Delta U_g + \Delta U_s = 0$ , where  $\Delta U_s$  is the change in the spring's elastic potential energy. Therefore,  $\Delta U_s = -\Delta U_g = -0.98 \text{ J}$ .

(c) We take the spring potential energy to be zero when the spring is relaxed. Then, our result in the previous part implies that its initial potential energy is  $U_s = 0.98 \text{ J}$ . This must be  $\frac{1}{2} kx^2$ , where  $k$  is the spring constant and  $x$  is the initial compression. Consequently,

$$k = \frac{2U_s}{x^2} = \frac{2(0.98 \text{ J})}{(0.080 \text{ m})^2} = 3.1 \times 10^2 \text{ N/m} = 3.1 \text{ N/cm}.$$

16. We use Eq. 8-18, representing the conservation of mechanical energy. The reference position for computing  $U$  is the lowest point of the swing; it is also regarded as the “final” position in our calculations.

(a) In the solution to problem 7, we found  $U = mgL(1 - \cos \theta)$  at the position shown in Fig. 8-34 (which we consider to be the initial position). Thus, we have

$$K_i + U_i = K_f + U_f$$

$$0 + mgL(1 - \cos \theta) = \frac{1}{2}mv^2 + 0$$

which leads to

$$v = \sqrt{\frac{2mgL(1 - \cos \theta)}{m}} = \sqrt{2gL(1 - \cos \theta)}.$$

Plugging in  $L = 2.00$  m and  $\theta = 30.0^\circ$  we find  $v = 2.29$  m/s.

(b) It is evident that the result for  $v$  does not depend on mass. Thus, a different mass for the ball must not change the result.

17. We use Eq. 8-18, representing the conservation of mechanical energy (which neglects friction and other dissipative effects). The reference position for computing  $U$  (and height  $h$ ) is the lowest point of the swing; it is also regarded as the “final” position in our calculations.

(a) Careful examination of the figure leads to the trigonometric relation  $h = L - L \cos \theta$  when the angle is measured from vertical as shown. Thus, the gravitational potential energy is  $U = mgL(1 - \cos \theta_0)$  at the position shown in Fig. 8-34 (the initial position). Thus, we have

$$K_0 + U_0 = K_f + U_f$$

$$\frac{1}{2}mv_0^2 + mgL(1 - \cos \theta_0) = \frac{1}{2}mv^2 + 0$$

which leads to

$$v = \sqrt{\frac{2}{m} \left[ \frac{1}{2}mv_0^2 + mgL(1 - \cos \theta_0) \right]} = \sqrt{v_0^2 + 2gL(1 - \cos \theta_0)}$$

$$= \sqrt{(8.00 \text{ m/s})^2 + 2(9.80 \text{ m/s}^2)(1.25 \text{ m})(1 - \cos 40^\circ)} = 8.35 \text{ m/s}.$$

(b) We look for the initial speed required to barely reach the horizontal position — described by  $v_h = 0$  and  $\theta = 90^\circ$  (or  $\theta = -90^\circ$ , if one prefers, but since  $\cos(-\phi) = \cos \phi$ , the sign of the angle is not a concern).

$$K_0 + U_0 = K_h + U_h$$

$$\frac{1}{2}mv_0^2 + mgL(1 - \cos \theta_0) = 0 + mgL$$

which yields

$$v_0 = \sqrt{2gL \cos \theta_0} = \sqrt{2(9.80 \text{ m/s}^2)(1.25 \text{ m}) \cos 40^\circ} = 4.33 \text{ m/s}.$$

(c) For the cord to remain straight, then the centripetal force (at the top) must be (at least) equal to gravitational force:

$$\frac{mv_t^2}{r} = mg \Rightarrow mv_t^2 = mgL$$

where we recognize that  $r = L$ . We plug this into the expression for the kinetic energy (at the top, where  $\theta = 180^\circ$ ).

$$K_0 + U_0 = K_t + U_t$$

$$\frac{1}{2}mv_0^2 + mgL(1 - \cos \theta_0) = \frac{1}{2}mv_t^2 + mg(1 - \cos 180^\circ)$$

$$\frac{1}{2}mv_0^2 + mgL(1 - \cos \theta_0) = \frac{1}{2}(mgL) + mg(2L)$$

which leads to

$$v_0 = \sqrt{gL(3 + 2 \cos \theta_0)} = \sqrt{(9.80 \text{ m/s}^2)(1.25 \text{ m})(3 + 2 \cos 40^\circ)} = 7.45 \text{ m/s}.$$

(d) The more initial potential energy there is, the less initial kinetic energy there needs to be, in order to reach the positions described in parts (b) and (c). Increasing  $\theta_0$  amounts to increasing  $U_0$ , so we see that a greater value of  $\theta_0$  leads to smaller results for  $v_0$  in parts (b) and (c).

18. We place the reference position for evaluating gravitational potential energy at the relaxed position of the spring. We use  $x$  for the spring's compression, measured positively downwards (so  $x > 0$  means it is compressed).

(a) With  $x = 0.190$  m, Eq. 7-26 gives

$$W_s = -\frac{1}{2}kx^2 = -7.22 \text{ J} \approx -7.2 \text{ J}$$

for the work done by the spring force. Using Newton's third law, we see that the work done on the spring is 7.2 J.

(b) As noted above,  $W_s = -7.2$  J.

(c) Energy conservation leads to

$$\begin{aligned} K_i + U_i &= K_f + U_f \\ mgh_0 &= -mgx + \frac{1}{2}kx^2 \end{aligned}$$

which (with  $m = 0.70$  kg) yields  $h_0 = 0.86$  m.

(d) With a new value for the height  $h'_0 = 2h_0 = 1.72$  m, we solve for a new value of  $x$  using the quadratic formula (taking its positive root so that  $x > 0$ ).

$$mgh'_0 = -mgx + \frac{1}{2}kx^2 \Rightarrow x = \frac{mg + \sqrt{(mg)^2 + 2mgkh'_0}}{k}$$

which yields  $x = 0.26$  m.

19. (a) At  $Q$  the block (which is in circular motion at that point) experiences a centripetal acceleration  $v^2/R$  leftward. We find  $v^2$  from energy conservation:

$$K_P + U_P = K_Q + U_Q$$

$$0 + mgh = \frac{1}{2}mv^2 + mgR$$

Using the fact that  $h = 5R$ , we find  $mv^2 = 8mgR$ . Thus, the horizontal component of the net force on the block at  $Q$  is

$$F = mv^2/R = 8mg = 8(0.032 \text{ kg})(9.8 \text{ m/s}^2) = 2.5 \text{ N.}$$

and points left (in the same direction as  $\vec{a}$ ).

(b) The downward component of the net force on the block at  $Q$  is the downward force of gravity

$$F = mg = (0.032 \text{ kg})(9.8 \text{ m/s}^2) = 0.31 \text{ N.}$$

(c) To barely make the top of the loop, the centripetal force there must equal the force of gravity:

$$\frac{mv_t^2}{R} = mg \Rightarrow mv_t^2 = mgR$$

This requires a different value of  $h$  than was used above.

$$K_P + U_P = K_t + U_t$$

$$0 + mgh = \frac{1}{2}mv_t^2 + mgh_t$$

$$mgh = \frac{1}{2}(mgR) + mg(2R)$$

Consequently,  $h = 2.5R = (2.5)(0.12 \text{ m}) = 0.30 \text{ m.}$

(d) The normal force  $F_N$ , for speeds  $v_t$  greater than  $\sqrt{gR}$  (which are the only possibilities for non-zero  $F_N$  — see the solution in the previous part), obeys

$$F_N = \frac{mv_t^2}{R} - mg$$




from Newton's second law. Since  $v_t^2$  is related to  $h$  by energy conservation

$$K_p + U_p = K_t + U_t \Rightarrow gh = \frac{1}{2}v_t^2 + 2gR$$

then the normal force, as a function for  $h$  (so long as  $h \geq 2.5R$  — see solution in previous part), becomes

$$F_N = \frac{2mgh}{R} - 5mg$$

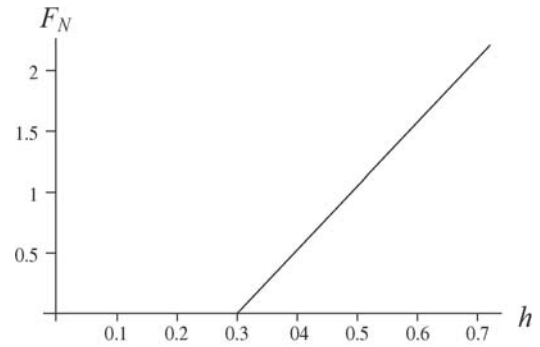

Thus, the graph for  $h \geq 2.5R$  consists of a straight line of positive slope  $2mg/R$  (which can be set to some convenient values for graphing purposes).

Note that for  $h \leq 2.5R$ , the normal force is zero.

20. (a) With energy in Joules and length in meters, we have

$$\Delta U = U(x) - U(0) = -\int_0^x (6x' - 12) dx' .$$

Therefore, with  $U(0) = 27$  J, we obtain  $U(x)$  (written simply as  $U$ ) by integrating and rearranging:

$$U = 27 + 12x - 3x^2 .$$

(b) We can maximize the above function by working through the  $dU/dx = 0$  condition, or we can treat this as a force equilibrium situation — which is the approach we show.

$$F = 0 \Rightarrow 6x_{eq} - 12 = 0$$

Thus,  $x_{eq} = 2.0$  m, and the above expression for the potential energy becomes  $U = 39$  J.

(c) Using the quadratic formula or using the polynomial solver on an appropriate calculator, we find the negative value of  $x$  for which  $U = 0$  to be  $x = -1.6$  m.

(d) Similarly, we find the positive value of  $x$  for which  $U = 0$  to be  $x = 5.6$  m

21. (a) As the string reaches its lowest point, its original potential energy  $U = mgL$  (measured relative to the lowest point) is converted into kinetic energy. Thus,

$$mgL = \frac{1}{2}mv^2 \Rightarrow v = \sqrt{2gL} .$$

With  $L = 1.20$  m we obtain  $v = 4.85$  m/s .

(b) In this case, the total mechanical energy is shared between kinetic  $\frac{1}{2}mv_b^2$  and potential  $mg y_b$ . We note that  $y_b = 2r$  where  $r = L - d = 0.450$  m. Energy conservation leads to

$$mgL = \frac{1}{2}mv_b^2 + mg y_b$$

which yields  $v_b = \sqrt{2gL - 2g(2r)} = 2.42$  m/s .

22. We denote  $m$  as the mass of the block,  $h = 0.40$  m as the height from which it dropped (measured from the relaxed position of the spring), and  $x$  the compression of the spring (measured downward so that it yields a positive value). Our reference point for the gravitational potential energy is the initial position of the block. The block drops a total distance  $h + x$ , and the final gravitational potential energy is  $-mg(h + x)$ . The spring potential energy is  $\frac{1}{2}kx^2$  in the final situation, and the kinetic energy is zero both at the beginning and end. Since energy is conserved

$$K_i + U_i = K_f + U_f$$

$$0 = -mg(h + x) + \frac{1}{2}kx^2$$

which is a second degree equation in  $x$ . Using the quadratic formula, its solution is

$$x = \frac{mg \pm \sqrt{(mg)^2 + 2mghk}}{k}.$$

Now  $mg = 19.6$  N,  $h = 0.40$  m, and  $k = 1960$  N/m, and we choose the positive root so that  $x > 0$ .

$$x = \frac{19.6 + \sqrt{19.6^2 + 2(19.6)(0.40)(1960)}}{1960} = 0.10 \text{ m}.$$

23. Since time does not directly enter into the energy formulations, we return to Chapter 4 (or Table 2-1 in Chapter 2) to find the change of height during this  $t = 6.0$  s flight.

$$\Delta y = v_{0y}t - \frac{1}{2}gt^2$$

This leads to  $\Delta y = -32$  m . Therefore  $\Delta U = mg\Delta y = -318 \text{ J} \approx -3.2 \times 10^{-2} \text{ J}$  .

24. From Chapter 4, we know the height  $h$  of the skier's jump can be found from  $v_y^2 = 0 = v_{0,y}^2 - 2gh$  where  $v_{0,y} = v_0 \sin 28^\circ$  is the upward component of the skier's "launch velocity." To find  $v_0$  we use energy conservation.

(a) The skier starts at rest  $y = 20$  m above the point of "launch" so energy conservation leads to

$$mgy = \frac{1}{2}mv^2 \Rightarrow v = \sqrt{2gy} = 20 \text{ m/s}$$

which becomes the initial speed  $v_0$  for the launch. Hence, the above equation relating  $h$  to  $v_0$  yields

$$h = \frac{(v_0 \sin 28^\circ)^2}{2g} = 4.4 \text{ m} .$$

(b) We see that all reference to mass cancels from the above computations, so a new value for the mass will yield the same result as before.

25. (a) To find out whether or not the vine breaks, it is sufficient to examine it at the moment Tarzan swings through the lowest point, which is when the vine — if it didn't break — would have the greatest tension. Choosing upward positive, Newton's second law leads to

$$T - mg = m \frac{v^2}{r}$$

where  $r = 18.0 \text{ m}$  and  $m = W/g = 688/9.8 = 70.2 \text{ kg}$ . We find the  $v^2$  from energy conservation (where the reference position for the potential energy is at the lowest point).

$$mgh = \frac{1}{2}mv^2 \Rightarrow v^2 = 2gh$$

where  $h = 3.20 \text{ m}$ . Combining these results, we have

$$T = mg + m \frac{2gh}{r} = mg \left( 1 + \frac{2h}{r} \right)$$

which yields 933 N. Thus, the vine does not break.

(b) Rounding to an appropriate number of significant figures, we see the maximum tension is roughly  $9.3 \times 10^2 \text{ N}$ .

26. (a) We take the reference point for gravitational energy to be at the lowest point of the swing. Let  $\theta$  be the angle measured from vertical. Then the height  $y$  of the pendulum “bob” (the object at the end of the pendulum, which in this problem is the stone) is given by  $L(1 - \cos\theta) = y$ . Hence, the gravitational potential energy is

$$mgy = mgL(1 - \cos\theta).$$

When  $\theta = 0^\circ$  (the string at its lowest point) we are told that its speed is 8.0 m/s; its kinetic energy there is therefore 64 J (using Eq. 7-1). At  $\theta = 60^\circ$  its mechanical energy is

$$E_{\text{mech}} = \frac{1}{2} mv^2 + mgL(1 - \cos\theta).$$

Energy conservation (since there is no friction) requires that this be equal to 64 J. Solving for the speed, we find  $v = 5.0$  m/s.

(b) We now set the above expression again equal to 64 J (with  $\theta$  being the unknown) but with zero speed (which gives the condition for the maximum point, or “turning point” that it reaches). This leads to  $\theta_{\text{max}} = 79^\circ$ .

(c) As observed in our solution to part (a), the total mechanical energy is 64 J.



27. We convert to SI units and choose upward as the  $+y$  direction. Also, the relaxed position of the top end of the spring is the origin, so the initial compression of the spring (defining an equilibrium situation between the spring force and the force of gravity) is  $y_0 = -0.100$  m and the additional compression brings it to the position  $y_1 = -0.400$  m.

(a) When the stone is in the equilibrium ( $a = 0$ ) position, Newton's second law becomes

$$\begin{aligned}\vec{F}_{\text{net}} &= ma \\ F_{\text{spring}} - mg &= 0 \\ -k(-0.100) - (8.00)(9.8) &= 0\end{aligned}$$

where Hooke's law (Eq. 7-21) has been used. This leads to a spring constant equal to  $k = 784$  N/m.

(b) With the additional compression (and release) the acceleration is no longer zero, and the stone will start moving upwards, turning some of its elastic potential energy (stored in the spring) into kinetic energy. The amount of elastic potential energy at the moment of release is, using Eq. 8-11,

$$U = \frac{1}{2} ky_1^2 = \frac{1}{2}(784)(-0.400)^2 = 62.7 \text{ J.}$$

(c) Its maximum height  $y_2$  is beyond the point that the stone separates from the spring (entering free-fall motion). As usual, it is characterized by having (momentarily) zero speed. If we choose the  $y_1$  position as the reference position in computing the gravitational potential energy, then

$$\begin{aligned}K_1 + U_1 &= K_2 + U_2 \\ 0 + \frac{1}{2} ky_1^2 &= 0 + mgh\end{aligned}$$

where  $h = y_2 - y_1$  is the height above the release point. Thus,  $mgh$  (the gravitational potential energy) is seen to be equal to the previous answer, 62.7 J, and we proceed with the solution in the next part.

(d) We find  $h = ky_1^2 / 2mg = 0.800$  m, or 80.0 cm.

28. We take the original height of the box to be the  $y = 0$  reference level and observe that, in general, the height of the box (when the box has moved a distance  $d$  downhill) is  $y = -d \sin 40^\circ$ .

(a) Using the conservation of energy, we have

$$K_i + U_i = K + U \Rightarrow 0 + 0 = \frac{1}{2}mv^2 + mgy + \frac{1}{2}kd^2.$$

Therefore, with  $d = 0.10$  m, we obtain  $v = 0.81$  m/s.

(b) We look for a value of  $d \neq 0$  such that  $K = 0$ .

$$K_i + U_i = K + U \Rightarrow 0 + 0 = 0 + mgy + \frac{1}{2}kd^2.$$

Thus, we obtain  $mgd \sin 40^\circ = \frac{1}{2}kd^2$  and find  $d = 0.21$  m.

(c) The uphill force is caused by the spring (Hooke's law) and has magnitude  $kd = 25.2$  N. The downhill force is the component of gravity  $mg \sin 40^\circ = 12.6$  N. Thus, the net force on the box is  $(25.2 - 12.6)$  N = 12.6 N uphill, with  $a = F/m = (12.6 \text{ N})/(2.0 \text{ kg}) = 6.3 \text{ m/s}^2$ .

(d) The acceleration is up the incline.

29. The reference point for the gravitational potential energy  $U_g$  (and height  $h$ ) is at the block when the spring is maximally compressed. When the block is moving to its highest point, it is first accelerated by the spring; later, it separates from the spring and finally reaches a point where its speed  $v_f$  is (momentarily) zero. The  $x$  axis is along the incline, pointing uphill (so  $x_0$  for the initial compression is negative-valued); its origin is at the relaxed position of the spring. We use SI units, so  $k = 1960$  N/m and  $x_0 = -0.200$  m.

(a) The elastic potential energy is  $\frac{1}{2} kx_0^2 = 39.2$  J .

(b) Since initially  $U_g = 0$ , the change in  $U_g$  is the same as its final value  $mgh$  where  $m = 2.00$  kg. That this must equal the result in part (a) is made clear in the steps shown in the next part. Thus,  $\Delta U_g = U_g = 39.2$  J.

(c) The principle of mechanical energy conservation leads to

$$K_0 + U_0 = K_f + U_f$$

$$0 + \frac{1}{2} kx_0^2 = 0 + mgh$$

which yields  $h = 2.00$  m. The problem asks for the distance *along the incline*, so we have  $d = h/\sin 30^\circ = 4.00$  m.

30. From the slope of the graph, we find the spring constant

$$k = \frac{\Delta F}{\Delta x} = 0.10 \text{ N/cm} = 10 \text{ N/m}.$$

(a) Equating the potential energy of the compressed spring to the kinetic energy of the cork at the moment of release, we have

$$\frac{1}{2} kx^2 = \frac{1}{2} mv^2 \Rightarrow v = x \sqrt{\frac{k}{m}}$$

which yields  $v = 2.8 \text{ m/s}$  for  $m = 0.0038 \text{ kg}$  and  $x = 0.055 \text{ m}$ .

(b) The new scenario involves some potential energy at the moment of release. With  $d = 0.015 \text{ m}$ , energy conservation becomes

$$\frac{1}{2} kx^2 = \frac{1}{2} mv^2 + \frac{1}{2} kd^2 \Rightarrow v = \sqrt{\frac{k}{m}(x^2 - d^2)}$$

which yields  $v = 2.7 \text{ m/s}$ .

31. We refer to its starting point as  $A$ , the point where it first comes into contact with the spring as  $B$ , and the point where the spring is compressed  $|x| = 0.055$  m as  $C$ . Point  $C$  is our reference point for computing gravitational potential energy. Elastic potential energy (of the spring) is zero when the spring is relaxed. Information given in the second sentence allows us to compute the spring constant. From Hooke's law, we find

$$k = \frac{F}{x} = \frac{270 \text{ N}}{0.02 \text{ m}} = 1.35 \times 10^4 \text{ N/m} .$$

(a) The distance between points  $A$  and  $B$  is  $\vec{F}_g$  and we note that the total sliding distance  $\ell + |x|$  is related to the initial height  $h$  of the block (measured relative to  $C$ ) by

$$\frac{h}{\ell + |x|} = \sin \theta$$

where the incline angle  $\theta$  is  $30^\circ$ . Mechanical energy conservation leads to

$$\begin{aligned} K_A + U_A &= K_C + U_C \\ 0 + mgh &= 0 + \frac{1}{2} kx^2 \end{aligned}$$

which yields

$$h = \frac{kx^2}{2mg} = \frac{(1.35 \times 10^4 \text{ N/m})(0.055 \text{ m})^2}{2(12 \text{ kg})(9.8 \text{ m/s}^2)} = 0.174 \text{ m} .$$

Therefore,

$$\ell + |x| = \frac{h}{\sin 30^\circ} = \frac{0.174 \text{ m}}{\sin 30^\circ} = 0.35 \text{ m} .$$

(b) From this result, we find  $\ell = 0.35 - 0.055 = 0.29$  m , which means that  $\Delta y = -\ell \sin \theta = -0.15$  m in sliding from point  $A$  to point  $B$ . Thus, Eq. 8-18 gives

$$\begin{aligned} \Delta K + \Delta U &= 0 \\ \frac{1}{2} mv_B^2 + mg\Delta h &= 0 \end{aligned}$$

which yields  $v_B = \sqrt{-2g\Delta h} = \sqrt{-(9.8)(-0.15)} = 1.7$  m/s .

32. The work required is the change in the gravitational potential energy as a result of the chain being pulled onto the table. Dividing the hanging chain into a large number of infinitesimal segments, each of length  $dy$ , we note that the mass of a segment is  $(m/L) dy$  and the change in potential energy of a segment when it is a distance  $|y|$  below the table top is

$$dU = (m/L)g|y| dy = -(m/L)gy dy$$

since  $y$  is negative-valued (we have  $+y$  upward and the origin is at the tabletop). The total potential energy change is

$$\Delta U = -\frac{mg}{L} \int_{-L/4}^0 y dy = \frac{1}{2} \frac{mg}{L} (L/4)^2 = mgL/32.$$

The work required to pull the chain onto the table is therefore

$$W = \Delta U = mgL/32 = (0.012 \text{ kg})(9.8 \text{ m/s}^2)(0.28 \text{ m})/32 = 0.0010 \text{ J}.$$

33. All heights  $h$  are measured from the lower end of the incline (which is our reference position for computing gravitational potential energy  $mgh$ ). Our  $x$  axis is along the incline, with  $+x$  being uphill (so spring compression corresponds to  $x > 0$ ) and its origin being at the relaxed end of the spring. The height that corresponds to the canister's initial position (with spring compressed amount  $x = 0.200$  m) is given by  $h_1 = (D + x) \sin \theta$ , where  $\theta = 37^\circ$ .

(a) Energy conservation leads to

$$K_1 + U_1 = K_2 + U_2 \quad \Rightarrow \quad 0 + mg(D + x) \sin \theta + \frac{1}{2} kx^2 = \frac{1}{2} mv_2^2 + mgD \sin \theta$$

which yields, using the data  $m = 2.00$  kg and  $k = 170$  N/m,

$$v_2 = \sqrt{2gx \sin \theta + kx^2 / m} = 2.40 \text{ m/s}.$$

(b) In this case, energy conservation leads to

$$\begin{aligned} K_1 + U_1 &= K_3 + U_3 \\ 0 + mg(D + x) \sin \theta + \frac{1}{2} kx^2 &= \frac{1}{2} mv_3^2 + 0 \end{aligned}$$

which yields  $v_3 = \sqrt{2g(D + x) \sin \theta + kx^2 / m} = 4.19 \text{ m/s}$ .

34. The distance the marble travels is determined by its initial speed (and the methods of Chapter 4), and the initial speed is determined (using energy conservation) by the original compression of the spring. We denote  $h$  as the height of the table, and  $x$  as the horizontal distance to the point where the marble lands. Then  $x = v_0 t$  and  $h = \frac{1}{2}gt^2$  (since the vertical component of the marble's "launch velocity" is zero). From these we find  $x = v_0 \sqrt{2h/g}$ . We note from this that the distance to the landing point is directly proportional to the initial speed. We denote  $v_{01}$  be the initial speed of the first shot and  $D_1 = (2.20 - 0.27) \text{ m} = 1.93 \text{ m}$  be the horizontal distance to its landing point; similarly,  $v_{02}$  is the initial speed of the second shot and  $D = 2.20 \text{ m}$  is the horizontal distance to its landing spot. Then

$$\frac{v_{02}}{v_{01}} = \frac{D}{D_1} \Rightarrow v_{02} = \frac{D}{D_1} v_{01}$$

When the spring is compressed an amount  $\ell$ , the elastic potential energy is  $\frac{1}{2}k\ell^2$ . When the marble leaves the spring its kinetic energy is  $\frac{1}{2}mv_0^2$ . Mechanical energy is conserved:  $\frac{1}{2}mv_0^2 = \frac{1}{2}k\ell^2$ , and we see that the initial speed of the marble is directly proportional to the original compression of the spring. If  $\ell_1$  is the compression for the first shot and  $\ell_2$  is the compression for the second, then  $v_{02} = (\ell_2/\ell_1)v_{01}$ . Relating this to the previous result, we obtain

$$\ell_2 = \frac{D}{D_1} \ell_1 = \left( \frac{2.20 \text{ m}}{1.93 \text{ m}} \right) (1.10 \text{ cm}) = 1.25 \text{ cm}.$$



35. Consider a differential element of length  $dx$  at a distance  $x$  from one end (the end which remains stuck) of the cord. As the cord turns vertical, its change in potential energy is given by

$$dU = -(\lambda dx)gx$$

where  $\lambda = m/h$  is the mass/unit length and the negative sign indicates that the potential energy decreases. Integrating over the entire length, we obtain the total change in the potential energy:

$$\Delta U = \int dU = - \int_0^h \lambda g x dx = -\frac{1}{2} \lambda g h^2 = -\frac{1}{2} m g h.$$

With  $m=15$  g and  $h = 25$  cm, we have  $\Delta U = -0.018$  J.

36. Let  $\vec{F}_N$  be the normal force of the ice on him and  $m$  is his mass. The net inward force is  $mg \cos \theta - F_N$  and, according to Newton's second law, this must be equal to  $mv^2/R$ , where  $v$  is the speed of the boy. At the point where the boy leaves the ice  $F_N = 0$ , so  $g \cos \theta = v^2/R$ . We wish to find his speed. If the gravitational potential energy is taken to be zero when he is at the top of the ice mound, then his potential energy at the time shown is

$$U = -mgR(1 - \cos \theta).$$

He starts from rest and his kinetic energy at the time shown is  $\frac{1}{2}mv^2$ . Thus conservation of energy gives

$$0 = \frac{1}{2}mv^2 - mgR(1 - \cos \theta),$$

or  $v^2 = 2gR(1 - \cos \theta)$ . We substitute this expression into the equation developed from the second law to obtain  $g \cos \theta = 2g(1 - \cos \theta)$ . This gives  $\cos \theta = 2/3$ . The height of the boy above the bottom of the mound is

$$h = R \cos \theta = 2R/3 = 2(13.8 \text{ m})/3 = 9.20 \text{ m}.$$

37. (a) The (final) elastic potential energy is

$$U = \frac{1}{2} kx^2 = \frac{1}{2} (431 \text{ N/m})(0.210 \text{ m})^2 = 9.50 \text{ J}.$$

Ultimately this must come from the original (gravitational) energy in the system  $mg y$  (where we are measuring  $y$  from the lowest “elevation” reached by the block, so  $y = (d + x)\sin(30^\circ)$ ). Thus,

$$mg(d + x)\sin(30^\circ) = 9.50 \text{ J} \quad \Rightarrow \quad d = 0.396 \text{ m}.$$

(b) The block is still accelerating (due to the component of gravity along the incline,  $mg\sin(30^\circ)$ ) for a few moments after coming into contact with the spring (which exerts the Hooke’s law force  $kx$ ), until the Hooke’s law force is strong enough to cause the block to being decelerating. This point is reached when

$$kx = mg\sin 30^\circ$$

which leads to  $x = 0.0364 \text{ m} = 3.64 \text{ cm}$ ; this is long before the block finally stops (36.0 cm before it stops).

38. (a) The force at the equilibrium position  $r = r_{\text{eq}}$  is

$$F = -\frac{dU}{dr} \Big|_{r=r_{\text{eq}}} = 0 \quad \Rightarrow \quad -\frac{12A}{r_{\text{eq}}^{13}} + \frac{6B}{r_{\text{eq}}^7} = 0$$

which leads to the result

$$r_{\text{eq}} = \left( \frac{2A}{B} \right)^{\frac{1}{6}} = 1.12 \left( \frac{A}{B} \right)^{\frac{1}{6}}.$$

(b) This defines a minimum in the potential energy curve (as can be verified either by a graph or by taking another derivative and verifying that it is concave upward at this point), which means that for values of  $r$  slightly smaller than  $r_{\text{eq}}$  the slope of the curve is negative (so the force is positive, repulsive).

(c) And for values of  $r$  slightly larger than  $r_{\text{eq}}$  the slope of the curve must be positive (so the force is negative, attractive).

39. From Fig. 8-50, we see that at  $x = 4.5$  m, the potential energy is  $U_1 = 15$  J. If the speed is  $v = 7.0$  m/s, then the kinetic energy is

$$K_1 = mv^2/2 = (0.90 \text{ kg})(7.0 \text{ m/s})^2/2 = 22 \text{ J}.$$

The total energy is  $E_1 = U_1 + K_1 = (15 + 22) \text{ J} = 37 \text{ J}$ .

(a) At  $x = 1.0$  m, the potential energy is  $U_2 = 35$  J. From energy conservation, we have  $K_2 = 2.0 \text{ J} > 0$ . This means that the particle can reach there with a corresponding speed

$$v_2 = \sqrt{\frac{2K_2}{m}} = \sqrt{\frac{2(2.0 \text{ J})}{0.90 \text{ kg}}} = 2.1 \text{ m/s}.$$

(b) The force acting on the particle is related to the potential energy by the negative of the slope:

$$F_x = -\frac{\Delta U}{\Delta x}$$

From the figure we have  $F_x = -\frac{35 \text{ J} - 15 \text{ J}}{2 \text{ m} - 4 \text{ m}} = +10 \text{ N}$ .

(c) Since the magnitude  $F_x > 0$ , the force points in the  $+x$  direction.

(d) At  $x = 7.0$  m, the potential energy is  $U_3 = 45$  J which exceeds the initial total energy  $E_1$ . Thus, the particle can never reach there. At the turning point, the kinetic energy is zero. Between  $x = 5$  and  $6$  m, the potential energy is given by

$$U(x) = 15 + 30(x - 5), \quad 5 \leq x \leq 6.$$

Thus, the turning point is found by solving  $37 = 15 + 30(x - 5)$ , which yields  $x = 5.7$  m.

(e) At  $x = 5.0$  m, the force acting on the particle is

$$F_x = -\frac{\Delta U}{\Delta x} = -\frac{(45 - 15) \text{ J}}{(6 - 5) \text{ m}} = -30 \text{ N}$$

The magnitude is  $|F_x| = 30 \text{ N}$ .

(f) The fact that  $F_x < 0$  indicated that the force points in the  $-x$  direction.

40. In this problem, the mechanical energy (the sum of  $K$  and  $U$ ) remains constant as the particle moves.

(a) Since mechanical energy is conserved,  $U_B + K_B = U_A + K_A$ , the kinetic energy of the particle in region  $A$  ( $3.00 \text{ m} \leq x \leq 4.00 \text{ m}$ ) is

$$K_A = U_B - U_A + K_B = 12.0 \text{ J} - 9.00 \text{ J} + 4.00 \text{ J} = 7.00 \text{ J}.$$

With  $K_A = mv_A^2/2$ , the speed of the particle at  $x = 3.5 \text{ m}$  (within region  $A$ ) is


$$v_A = \sqrt{\frac{2K_A}{m}} = \sqrt{\frac{2(7.00 \text{ J})}{0.200 \text{ kg}}} = 8.37 \text{ m/s}.$$

(b) At  $x = 6.5 \text{ m}$ ,  $U = 0$  and  $K = U_B + K_B = 12.0 \text{ J} + 4.00 \text{ J} = 16.0 \text{ J}$  by mechanical energy conservation. Therefore, the speed at this point is

$$v = \sqrt{\frac{2K}{m}} = \sqrt{\frac{2(16.0 \text{ J})}{0.200 \text{ kg}}} = 12.6 \text{ m/s}.$$


(c) At the turning point, the speed of the particle is zero. Let the position of the right turning point be  $x_R$ . From the figure shown on the right, we find  $x_R$  to be

$$\frac{16.00 \text{ J} - 0}{x_R - 7.00 \text{ m}} = \frac{24.00 \text{ J} - 16.00 \text{ J}}{8.00 \text{ m} - x_R} \Rightarrow x_R = 7.67 \text{ m}.$$




(d) Let the position of the left turning point be  $x_L$ . From the figure shown, we find  $x_L$  to be

$$\frac{16.00 \text{ J} - 20.00 \text{ J}}{x_L - 1.00 \text{ m}} = \frac{9.00 \text{ J} - 16.00 \text{ J}}{3.00 \text{ m} - x_L} \Rightarrow x_L = 1.73 \text{ m}.$$



41. (a) The energy at  $x = 5.0$  m is  $E = K + U = 2.0 \text{ J} - 5.7 \text{ J} = -3.7 \text{ J}$ .

(b) A plot of the potential energy curve (SI units understood) and the energy  $E$  (the horizontal line) is shown for  $0 \leq x \leq 10$  m.

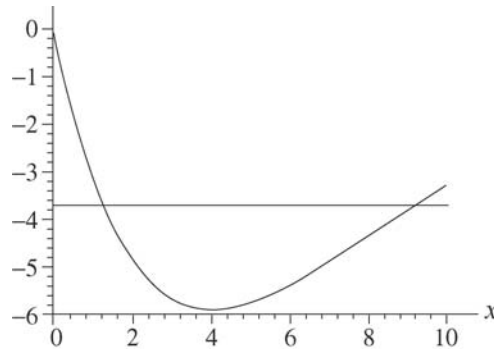

(c) The problem asks for a graphical determination of the turning points, which are the points on the curve corresponding to the total energy computed in part (a). The result for the smallest turning point (determined, to be honest, by more careful means) is  $x = 1.3$  m.

(d) And the result for the largest turning point is  $x = 9.1$  m.

(e) Since  $K = E - U$ , then maximizing  $K$  involves finding the minimum of  $U$ . A graphical determination suggests that this occurs at  $x = 4.0$  m, which plugs into the expression  $E - U = -3.7 - (-4xe^{-x/4})$  to give  $K = 2.16 \text{ J} \approx 2.2 \text{ J}$ . Alternatively, one can measure from the graph from the minimum of the  $U$  curve up to the level representing the total energy  $E$  and thereby obtain an estimate of  $K$  at that point.

(f) As mentioned in the previous part, the minimum of the  $U$  curve occurs at  $x = 4.0$  m.

(g) The force (understood to be in newtons) follows from the potential energy, using Eq. 8-20 (and Appendix E if students are unfamiliar with such derivatives).

$$F = \frac{dU}{dx} = (4 - x)e^{-x/4}$$

(h) This revisits the considerations of parts (d) and (e) (since we are returning to the minimum of  $U(x)$ ) — but now with the advantage of having the analytic result of part (g). We see that the location which produces  $F = 0$  is exactly  $x = 4.0$  m.

42. Since the velocity is constant,  $\vec{a} = 0$  and the horizontal component of the worker's push  $F \cos \theta$  (where  $\theta = 32^\circ$ ) must equal the friction force magnitude  $f_k = \mu_k F_N$ . Also, the vertical forces must cancel, implying

$$W_{\text{applied}} = (8.0\text{N})(0.70\text{m}) = 5.6 \text{ J}$$

which is solved to find  $F = 71 \text{ N}$ .

(a) The work done on the block by the worker is, using Eq. 7-7,

$$W = Fd \cos \theta = (71 \text{ N})(9.2 \text{ m}) \cos 32^\circ = 5.6 \times 10^2 \text{ J} .$$

(b) Since  $f_k = \mu_k (mg + F \sin \theta)$ , we find  $\Delta E_{\text{th}} = f_k d = (60 \text{ N})(9.2 \text{ m}) = 5.6 \times 10^2 \text{ J}$ .



43. (a) Using Eq. 7-8, we have

$$W_{\text{applied}} = (8.0 \text{ N})(0.70 \text{ m}) = 5.6 \text{ J}.$$

(b) Using Eq. 8-31, the thermal energy generated is

$$\Delta E_{\text{th}} = f_k d = (5.0 \text{ N})(0.70 \text{ m}) = 3.5 \text{ J}.$$

44. (a) The work is  $W = Fd = (35.0 \text{ N})(3.00 \text{ m}) = 105 \text{ J}$ .

(b) The total amount of energy that has gone to thermal forms is (see Eq. 8-31 and Eq. 6-2)

$$\Delta E_{\text{th}} = \mu_k mgd = (0.600)(4.00 \text{ kg})(9.80 \text{ m/s}^2)(3.00 \text{ m}) = 70.6 \text{ J}.$$

If 40.0 J has gone to the block then  $(70.6 - 40.0) \text{ J} = 30.6 \text{ J}$  has gone to the floor.

(c) Much of the work (105 J) has been “wasted” due to the 70.6 J of thermal energy generated, but there still remains  $(105 - 70.6) \text{ J} = 34.4 \text{ J}$  which has gone into increasing the kinetic energy of the block. (It has not gone into increasing the potential energy of the block because the floor is presumed to be horizontal.)

45. (a) The work done on the block by the force in the rope is, using Eq. 7-7,

$$W = Fd \cos \theta = (7.68 \text{ N})(4.06 \text{ m}) \cos 15.0^\circ = 30.1 \text{ J}.$$

(b) Using  $f$  for the magnitude of the kinetic friction force, Eq. 8-29 reveals that the increase in thermal energy is

$$\Delta E_{\text{th}} = fd = (7.42 \text{ N})(4.06 \text{ m}) = 30.1 \text{ J}.$$

(c) We can use Newton's second law of motion to obtain the frictional and normal forces, then use  $\mu_k = f/F_N$  to obtain the coefficient of friction. Place the  $x$  axis along the path of the block and the  $y$  axis normal to the floor. The  $x$  and the  $y$  component of Newton's second law are

$$\begin{aligned} x: \quad & F \cos \theta - f = 0 \\ y: \quad & F_N + F \sin \theta - mg = 0, \end{aligned}$$

where  $m$  is the mass of the block,  $F$  is the force exerted by the rope, and  $\theta$  is the angle between that force and the horizontal. The first equation gives

$$f = F \cos \theta = (7.68 \text{ N}) \cos 15.0^\circ = 7.42 \text{ N}$$

and the second gives

$$F_N = mg - F \sin \theta = (3.57 \text{ kg})(9.8 \text{ m/s}^2) - (7.68 \text{ N}) \sin 15.0^\circ = 33.0 \text{ N}.$$

Thus,

$$\mu_k = \frac{f}{F_N} = \frac{7.42 \text{ N}}{33.0 \text{ N}} = 0.225.$$

46. Equation 8-33 provides  $\Delta E_{\text{th}} = -\Delta E_{\text{mec}}$  for the energy “lost” in the sense of this problem. Thus,

$$\begin{aligned}\Delta E_{\text{th}} &= \frac{1}{2}m(v_i^2 - v_f^2) + mg(y_i - y_f) = \frac{1}{2}(60 \text{ kg})[(24 \text{ m/s})^2 - (22 \text{ m/s})^2] + (60 \text{ kg})(9.8 \text{ m/s}^2)(14 \text{ m}) \\ &= 1.1 \times 10^4 \text{ J}.\end{aligned}$$

That the angle of  $25^\circ$  is nowhere used in this calculation is indicative of the fact that energy is a scalar quantity.

47. (a) We take the initial gravitational potential energy to be  $U_i = 0$ . Then the final gravitational potential energy is  $U_f = -mgL$ , where  $L$  is the length of the tree. The change is

$$U_f - U_i = -mgL = -(25 \text{ kg})(9.8 \text{ m/s}^2)(12 \text{ m}) = -2.9 \times 10^3 \text{ J}.$$

(b) The kinetic energy is  $K = \frac{1}{2}mv^2 = \frac{1}{2}(25 \text{ kg})(5.6 \text{ m/s})^2 = 3.9 \times 10^2 \text{ J}$ .

(c) The changes in the mechanical and thermal energies must sum to zero. The change in thermal energy is  $\Delta E_{\text{th}} = fL$ , where  $f$  is the magnitude of the average frictional force; therefore,

$$f = -\frac{\Delta K + \Delta U}{L} = -\frac{3.9 \times 10^2 \text{ J} - 2.9 \times 10^3 \text{ J}}{12 \text{ m}} = 2.1 \times 10^2 \text{ N}$$

48. We work this using the English units (with  $g = 32 \text{ ft/s}$ ), but for consistency we convert the weight to pounds

$$mg = (9.0) \text{ oz} \left( \frac{16 \text{ lb}}{16 \text{ oz}} \right) = 0.56 \text{ lb}$$

which implies  $m = 0.018 \text{ lb} \cdot \text{s}^2/\text{ft}$  (which can be phrased as 0.018 slug as explained in Appendix D). And we convert the initial speed to feet-per-second

$$v_i = (81.8 \text{ mi/h}) \left( \frac{5280 \text{ ft/mi}}{3600 \text{ s/h}} \right) = 120 \text{ ft/s}$$

or a more “direct” conversion from Appendix D can be used. Equation 8-30 provides  $\Delta E_{\text{th}} = -\Delta E_{\text{mec}}$  for the energy “lost” in the sense of this problem. Thus,

$$\Delta E_{\text{th}} = \frac{1}{2} m(v_i^2 - v_f^2) + mg(y_i - y_f) = \frac{1}{2} (0.018)(120^2 - 110^2) + 0 = 20 \text{ ft} \cdot \text{lb}.$$

49. We use SI units so  $m = 0.075$  kg. Equation 8-33 provides  $\Delta E_{\text{th}} = -\Delta E_{\text{mec}}$  for the energy “lost” in the sense of this problem. Thus,

$$\begin{aligned}\Delta E_{\text{th}} &= \frac{1}{2}m(v_i^2 - v_f^2) + mg(y_i - y_f) \\ &= \frac{1}{2}(0.075 \text{ kg})[(12 \text{ m/s})^2 - (10.5 \text{ m/s})^2] + (0.075 \text{ kg})(9.8 \text{ m/s}^2)(1.1 \text{ m} - 2.1 \text{ m}) \\ &= 0.53 \text{ J}.\end{aligned}$$

50. We use Eq. 8-31 to obtain

$$\Delta E_{\text{th}} = f_k d = (10 \text{ N})(5.0 \text{ m}) = 50 \text{ J}$$

and Eq. 7-8 to get

$$W = Fd = (2.0 \text{ N})(5.0 \text{ m}) = 10 \text{ J}.$$

Similarly, Eq. 8-31 gives

$$W = \Delta K + \Delta U + \Delta E_{\text{th}}$$

$$10 = 35 + \Delta U + 50$$

which yields  $\Delta U = -75 \text{ J}$ . By Eq. 8-1, then, the work done by gravity is  $W = -\Delta U = 75 \text{ J}$ .



51. (a) The initial potential energy is

$$U_i = mgy_i = (520 \text{ kg}) (9.8 \text{ m/s}^2) (300 \text{ m}) = 1.53 \times 10^6 \text{ J}$$

where +y is upward and  $y = 0$  at the bottom (so that  $U_f = 0$ ).

(b) Since  $f_k = \mu_k F_N = \mu_k mg \cos \theta$  we have  $\Delta E_{\text{th}} = f_k d = \mu_k mgd \cos \theta$  from Eq. 8-31. Now, the hillside surface (of length  $d = 500 \text{ m}$ ) is treated as an hypotenuse of a 3-4-5 triangle, so  $\cos \theta = x/d$  where  $x = 400 \text{ m}$ . Therefore,

$$\Delta E_{\text{th}} = \mu_k mgd \frac{x}{d} = \mu_k mgx = (0.25)(520)(9.8)(400) = 5.1 \times 10^5 \text{ J}.$$

(c) Using Eq. 8-31 (with  $W = 0$ ) we find

$$\begin{aligned} K_f &= K_i + U_i - U_f - \Delta E_{\text{th}} \\ &= 0 + 1.53 \times 10^6 - 0 - 5.1 \times 10^5 \\ &= 0 + 1.02 \times 10^6 \text{ J}. \end{aligned}$$

(d) From  $K_f = mv^2 / 2$ , we obtain  $v = 63 \text{ m/s}$ .

52. Energy conservation, as expressed by Eq. 8-33 (with  $W = 0$ ) leads to

$$\begin{aligned}\Delta E_{\text{th}} = K_i - K_f + U_i - U_f &\Rightarrow f_k d = 0 - 0 + \frac{1}{2} kx^2 - 0 \\ \Rightarrow \mu_k mgd = \frac{1}{2} (200 \text{ N/m})(0.15 \text{ m})^2 &\Rightarrow \mu_k (2.0 \text{ kg})(9.8 \text{ m/s}^2)(0.75 \text{ m}) = 2.25 \text{ J}\end{aligned}$$

which yields  $\mu_k = 0.15$  as the coefficient of kinetic friction.

53. Since the valley is frictionless, the only reason for the speed being less when it reaches the higher level is the gain in potential energy  $\Delta U = mgh$  where  $h = 1.1$  m. Sliding along the rough surface of the higher level, the block finally stops since its remaining kinetic energy has turned to thermal energy  $\Delta E_{\text{th}} = f_k d = \mu mgd$ , where  $\mu = 0.60$ . Thus, Eq. 8-33 (with  $W = 0$ ) provides us with an equation to solve for the distance  $d$ :

$$K_i = \Delta U + \Delta E_{\text{th}} = mg(h + \mu d)$$

where  $K_i = mv_i^2 / 2$  and  $v_i = 6.0$  m/s. Dividing by mass and rearranging, we obtain

$$d = \frac{v_i^2}{2\mu g} - \frac{h}{\mu} = 1.2 \text{ m.}$$

54. (a) An appropriate picture (once friction is included) for this problem is Figure 8-3 in the textbook. We apply equation 8-31,  $\Delta E_{\text{th}} = f_k d$ , and relate initial kinetic energy  $K_i$  to the "resting" potential energy  $U_r$ :

$$K_i + U_i = f_k d + K_r + U_r \Rightarrow 20.0 \text{ J} + 0 = f_k d + 0 + \frac{1}{2} k d^2$$

where  $f_k = 10.0 \text{ N}$  and  $k = 400 \text{ N/m}$ . We solve the equation for  $d$  using the quadratic formula or by using the polynomial solver on an appropriate calculator, with  $d = 0.292 \text{ m}$  being the only positive root.

(b) We apply equation 8-31 again and relate  $U_r$  to the "second" kinetic energy  $K_s$  it has at the unstretched position.

$$K_r + U_r = f_k d + K_s + U_s \Rightarrow \frac{1}{2} k d^2 = f_k d + K_s + 0$$

Using the result from part (a), this yields  $K_s = 14.2 \text{ J}$ .

55. (a) The vertical forces acting on the block are the normal force, upward, and the force of gravity, downward. Since the vertical component of the block's acceleration is zero, Newton's second law requires  $F_N = mg$ , where  $m$  is the mass of the block. Thus  $f = \mu_k F_N = \mu_k mg$ . The increase in thermal energy is given by  $\Delta E_{\text{th}} = fd = \mu_k mgD$ , where  $D$  is the distance the block moves before coming to rest. Using Eq. 8-29, we have

$$\Delta E_{\text{th}} = (0.25)(3.5 \text{ kg})(9.8 \text{ m/s}^2)(7.8 \text{ m}) = 67 \text{ J}.$$

(b) The block has its maximum kinetic energy  $K_{\text{max}}$  just as it leaves the spring and enters the region where friction acts. Therefore, the maximum kinetic energy equals the thermal energy generated in bringing the block back to rest, 67 J.

(c) The energy that appears as kinetic energy is originally in the form of potential energy in the compressed spring. Thus,  $K_{\text{max}} = U_i = \frac{1}{2} kx^2$ , where  $k$  is the spring constant and  $x$  is the compression. Thus,

$$x = \sqrt{\frac{2K_{\text{max}}}{k}} = \sqrt{\frac{2(67 \text{ J})}{640 \text{ N/m}}} = 0.46 \text{ m}.$$

56. We look for the distance along the incline  $d$  which is related to the height ascended by  $\Delta h = d \sin \theta$ . By a force analysis of the style done in Ch. 6, we find the normal force has magnitude  $F_N = mg \cos \theta$  which means  $f_k = \mu_k mg \cos \theta$ . Thus, Eq. 8-33 (with  $W = 0$ ) leads to

$$\begin{aligned} 0 &= K_f - K_i + \Delta U + \Delta E_{\text{th}} \\ &= 0 - K_i + mgd \sin \theta + \mu_k mgd \cos \theta \end{aligned}$$

which leads to

$$d = \frac{K_i}{mg(\sin \theta + \mu_k \cos \theta)} = \frac{128}{(4.0)(9.8)(\sin 30^\circ + 0.30 \cos 30^\circ)} = 4.3 \text{ m.}$$

57. Before the launch, the mechanical energy is  $\Delta E_{\text{mech},0} = 0$ . At the maximum height  $h$  where the speed of the beetle vanishes, the mechanical energy is  $\Delta E_{\text{mech},1} = mgh$ . The change of the mechanical energy is related to the external force by

$$\Delta E_{\text{mech}} = \Delta E_{\text{mech},1} - \Delta E_{\text{mech},0} = mgh = F_{\text{avg}} d \cos \phi,$$

where  $F_{\text{avg}}$  is the average magnitude of the external force on the beetle.

(a) From the above equation, we have

$$F_{\text{avg}} = \frac{mgh}{d \cos \phi} = \frac{(4.0 \times 10^{-6} \text{ kg})(9.80 \text{ m/s}^2)(0.30 \text{ m})}{(7.7 \times 10^{-4} \text{ m})(\cos 0^\circ)} = 1.5 \times 10^{-2} \text{ N}.$$

(b) Dividing the above result by the mass of the beetle, we obtain

$$a = \frac{F_{\text{avg}}}{m} = \frac{h}{d \cos \phi} g = \frac{(0.30 \text{ m})}{(7.7 \times 10^{-4} \text{ m})(\cos 0^\circ)} g = 3.8 \times 10^2 g.$$

58. (a) Using the force analysis shown in Chapter 6, we find the normal force  $F_N = mg \cos \theta$  (where  $mg = 267 \text{ N}$ ) which means  $f_k = \mu_k F_N = \mu_k mg \cos \theta$ . Thus, Eq. 8-31 yields

$$\Delta E_{\text{th}} = f_k d = \mu_k mg d \cos \theta = (0.10)(267)(6.1) \cos 20^\circ = 1.5 \times 10^2 \text{ J}.$$

(b) The potential energy change is

$$\Delta U = mg(-d \sin \theta) = (267 \text{ N})(-6.1 \text{ m}) \sin 20^\circ = -5.6 \times 10^2 \text{ J}.$$

The initial kinetic energy is

$$K_i = \frac{1}{2} m v_i^2 = \frac{1}{2} \left( \frac{267 \text{ N}}{9.8 \text{ m/s}^2} \right) (0.457 \text{ m/s}^2) = 2.8 \text{ J}.$$

Therefore, using Eq. 8-33 (with  $W = 0$ ), the final kinetic energy is

$$K_f = K_i - \Delta U - \Delta E_{\text{th}} = 2.8 - (-5.6 \times 10^2) - 1.5 \times 10^2 = 4.1 \times 10^2 \text{ J}.$$

Consequently, the final speed is  $v_f = \sqrt{2K_f/m} = 5.5 \text{ m/s}$ .



59. (a) With  $x = 0.075$  m and  $k = 320$  N/m, Eq. 7-26 yields  $W_s = -\frac{1}{2}kx^2 = -0.90$  J. For later reference, this is equal to the negative of  $\Delta U$ .

(b) Analyzing forces, we find  $F_N = mg$  which means  $f_k = \mu_k F_N = \mu_k mg$ . With  $d = x$ , Eq. 8-31 yields

$$\Delta E_{\text{th}} = f_k d = \mu_k mgx = (0.25)(2.5)(9.8)(0.075) = 0.46 \text{ J.}$$

(c) Eq. 8-33 (with  $W = 0$ ) indicates that the initial kinetic energy is

$$K_i = \Delta U + \Delta E_{\text{th}} = 0.90 + 0.46 = 1.36 \text{ J}$$

which leads to  $v_i = \sqrt{2K_i/m} = 1.0 \text{ m/s}$ .

60. This can be worked entirely by the methods of Chapters 2–6, but we will use energy methods in as many steps as possible.

(a) By a force analysis of the style done in Ch. 6, we find the normal force has magnitude  $F_N = mg \cos \theta$  (where  $\theta = 40^\circ$ ) which means  $f_k = \mu_k F_N = \mu_k mg \cos \theta$  where  $\mu_k = 0.15$ . Thus, Eq. 8-31 yields

$$\Delta E_{\text{th}} = f_k d = \mu_k mgd \cos \theta.$$

Also, elementary trigonometry leads us to conclude that  $\Delta U = mgd \sin \theta$ . Eq. 8-33 (with  $W = 0$  and  $K_f = 0$ ) provides an equation for determining  $d$ :

$$\begin{aligned} K_i &= \Delta U + \Delta E_{\text{th}} \\ \frac{1}{2}mv_i^2 &= mgd(\sin \theta + \mu_k \cos \theta) \end{aligned}$$

where  $v_i = 1.4 \text{ m/s}$ . Dividing by mass and rearranging, we obtain

$$d = \frac{v_i^2}{2g(\sin \theta + \mu_k \cos \theta)} = 0.13 \text{ m}.$$

(b) Now that we know where on the incline it stops ( $d' = 0.13 + 0.55 = 0.68 \text{ m}$  from the bottom), we can use Eq. 8-33 again (with  $W = 0$  and now with  $K_i = 0$ ) to describe the final kinetic energy (at the bottom):

$$\begin{aligned} K_f &= -\Delta U - \Delta E_{\text{th}} \\ \frac{1}{2}mv^2 &= mgd'(\sin \theta - \mu_k \cos \theta) \end{aligned}$$

which — after dividing by the mass and rearranging — yields

$$v = \sqrt{2gd'(\sin \theta - \mu_k \cos \theta)} = 2.7 \text{ m/s}.$$

(c) In part (a) it is clear that  $d$  increases if  $\mu_k$  decreases — both mathematically (since it is a positive term in the denominator) and intuitively (less friction — less energy “lost”). In part (b), there are two terms in the expression for  $v$  which imply that it should increase if  $\mu_k$  were smaller: the increased value of  $d' = d_0 + d$  and that last factor  $\sin \theta - \mu_k \cos \theta$  which indicates that less is being subtracted from  $\sin \theta$  when  $\mu_k$  is less (so the factor itself increases in value).

61. (a) The maximum height reached is  $h$ . The thermal energy generated by air resistance as the stone rises to this height is  $\Delta E_{\text{th}} = fh$  by Eq. 8-31. We use energy conservation in the form of Eq. 8-33 (with  $W = 0$ ):

$$K_f + U_f + \Delta E_{\text{th}} = K_i + U_i$$

and we take the potential energy to be zero at the throwing point (ground level). The initial kinetic energy is  $K_i = \frac{1}{2}mv_0^2$ , the initial potential energy is  $U_i = 0$ , the final kinetic energy is  $K_f = 0$ , and the final potential energy is  $U_f = wh$ , where  $w = mg$  is the weight of the stone. Thus,  $wh + fh = \frac{1}{2}mv_0^2$ , and we solve for the height:

$$h = \frac{mv_0^2}{2(w + f)} = \frac{v_0^2}{2g(1 + f/w)}.$$

Numerically, we have, with  $m = (5.29 \text{ N})/(9.80 \text{ m/s}^2) = 0.54 \text{ kg}$ ,

$$h = \frac{(20.0 \text{ m/s})^2}{2(9.80 \text{ m/s}^2)(1 + 0.265/5.29)} = 19.4 \text{ m/s}.$$

(b) We notice that the force of the air is downward on the trip up and upward on the trip down, since it is opposite to the direction of motion. Over the entire trip the increase in thermal energy is  $\Delta E_{\text{th}} = 2fh$ . The final kinetic energy is  $K_f = \frac{1}{2}mv^2$ , where  $v$  is the speed of the stone just before it hits the ground. The final potential energy is  $U_f = 0$ . Thus, using Eq. 8-31 (with  $W = 0$ ), we find

$$\frac{1}{2}mv^2 + 2fh = \frac{1}{2}mv_0^2.$$

We substitute the expression found for  $h$  to obtain

$$\frac{2fv_0^2}{2g(1 + f/w)} = \frac{1}{2}mv^2 - \frac{1}{2}mv_0^2$$

which leads to

$$v^2 = v_0^2 - \frac{2fv_0^2}{mg(1 + f/w)} = v_0^2 - \frac{2fv_0^2}{w(1 + f/w)} = v_0^2 \left( 1 - \frac{2f}{w + f} \right) = v_0^2 \frac{w - f}{w + f}$$

where  $w$  was substituted for  $mg$  and some algebraic manipulations were carried out. Therefore,

$$v = v_0 \sqrt{\frac{w - f}{w + f}} = (20.0 \text{ m/s}) \sqrt{\frac{5.29 \text{ N} - 0.265 \text{ N}}{5.29 \text{ N} + 0.265 \text{ N}}} = 19.0 \text{ m/s}.$$

62. In the absence of friction, we have a simple conversion (as it moves along the inclined ramps) of energy between the kinetic form (Eq. 7-1) and the potential form (Eq. 8-9). Along the horizontal plateaus, however, there is friction which causes some of the kinetic energy to dissipate in accordance with Eq. 8-31 (along with Eq. 6-2 where  $\mu_k = 0.50$  and  $F_N = mg$  in this situation). Thus, after it slides down a (vertical) distance  $d$  it has gained  $K = \frac{1}{2} mv^2 = mgd$ , some of which ( $\Delta E_{th} = \mu_k mgd$ ) is dissipated, so that the value of kinetic energy at the end of the first plateau (just before it starts descending towards the lowest plateau) is  $K = mgd - \mu_k mgd = 0.5mgd$ . In its descent to the lowest plateau, it gains  $mgd/2$  more kinetic energy, but as it slides across it “loses”  $\mu_k mgd/2$  of it. Therefore, as it starts its climb up the right ramp, it has kinetic energy equal to

$$K = 0.5mgd + mgd/2 - \mu_k mgd/2 = 3 mgd / 4.$$

Setting this equal to Eq. 8-9 (to find the height to which it climbs) we get  $H = \frac{3}{4}d$ . Thus, the block (momentarily) stops on the inclined ramp at the right, at a height of

$$H = 0.75d = 0.75 (40 \text{ cm}) = 30 \text{ cm}$$

measured from the lowest plateau.

63. The initial and final kinetic energies are zero, and we set up energy conservation in the form of Eq. 8-33 (with  $W = 0$ ) according to our assumptions. Certainly, it can only come to a permanent stop somewhere in the flat part, but the question is whether this occurs during its first pass through (going rightward) or its second pass through (going leftward) or its third pass through (going rightward again), and so on. If it occurs during its first pass through, then the thermal energy generated is  $\Delta E_{\text{th}} = f_k d$  where  $d \leq L$  and  $f_k = \mu_k mg$ . If it occurs during its second pass through, then the total thermal energy is  $\Delta E_{\text{th}} = \mu_k mg(L + d)$  where we again use the symbol  $d$  for how far through the level area it goes during that last pass (so  $0 \leq d \leq L$ ). Generalizing to the  $n^{\text{th}}$  pass through, we see that

$$\Delta E_{\text{th}} = \mu_k mg[(n-1)L + d].$$

In this way, we have

$$mgh = \mu_k mg((n-1)L + d)$$

which simplifies (when  $h = L/2$  is inserted) to

$$\frac{d}{L} = 1 + \frac{1}{2\mu_k} - n.$$

The first two terms give  $1 + 1/2\mu_k = 3.5$ , so that the requirement  $0 \leq d/L \leq 1$  demands that  $n = 3$ . We arrive at the conclusion that  $d/L = \frac{1}{2}$ , or

$$d = \frac{1}{2}L = \frac{1}{2}(40 \text{ cm}) = 20 \text{ cm}$$

and that this occurs on its third pass through the flat region.

64. We will refer to the point where it first encounters the “rough region” as point  $C$  (this is the point at a height  $h$  above the reference level). From Eq. 8-17, we find the speed it has at point  $C$  to be

$$v_C = \sqrt{v_A^2 - 2gh} = \sqrt{(8.0)^2 - 2(9.8)(2.0)} = 4.980 \approx 5.0 \text{ m/s.}$$

Thus, we see that its kinetic energy right at the beginning of its “rough slide” (heading uphill towards  $B$ ) is

$$K_C = \frac{1}{2} m(4.980 \text{ m/s})^2 = 12.4m$$

(with SI units understood). Note that we “carry along” the mass (as if it were a known quantity); as we will see, it will cancel out, shortly. Using Eq. 8-37 (and Eq. 6-2 with  $F_N = mg\cos\theta$ ) and  $y = d\sin\theta$ , we note that if  $d < L$  (the block does not reach point  $B$ ), this kinetic energy will turn entirely into thermal (and potential) energy

$$K_C = mgy + f_k d \Rightarrow 12.4m = mgd\sin\theta + \mu_k mgd\cos\theta.$$

With  $\mu_k = 0.40$  and  $\theta = 30^\circ$ , we find  $d = 1.49 \text{ m}$ , which is greater than  $L$  (given in the problem as  $0.75 \text{ m}$ ), so our assumption that  $d < L$  is incorrect. What is its kinetic energy as it reaches point  $B$ ? The calculation is similar to the above, but with  $d$  replaced by  $L$  and the final  $v^2$  term being the unknown (instead of assumed zero):

$$\frac{1}{2} m v^2 = K_C - (mgL\sin\theta + \mu_k mgL\cos\theta).$$

This determines the speed with which it arrives at point  $B$ :

$$\begin{aligned} v_B &= \sqrt{v_C^2 - 2gL(\sin\theta + \mu_k \cos\theta)} \\ &= \sqrt{(4.98 \text{ m/s})^2 - 2(9.80 \text{ m/s}^2)(0.75 \text{ m})(\sin 30^\circ + 0.4 \cos 30^\circ)} = 3.5 \text{ m/s.} \end{aligned}$$

65. We observe that the last line of the problem indicates that static friction is not to be considered a factor in this problem. The friction force of magnitude  $f = 4400$  N mentioned in the problem is kinetic friction and (as mentioned) is constant (and directed upward), and the thermal energy change associated with it is  $\Delta E_{\text{th}} = fd$  (Eq. 8-31) where  $d = 3.7$  m in part (a) (but will be replaced by  $x$ , the spring compression, in part (b)).

(a) With  $W = 0$  and the reference level for computing  $U = mgy$  set at the top of the (relaxed) spring, Eq. 8-33 leads to

$$U_i = K + \Delta E_{\text{th}} \Rightarrow v = \sqrt{2d\left(g - \frac{f}{m}\right)}$$

which yields  $v = 7.4$  m/s for  $m = 1800$  kg.

(b) We again utilize Eq. 8-33 (with  $W = 0$ ), now relating its kinetic energy at the moment it makes contact with the spring to the system energy at the bottom-most point. Using the same reference level for computing  $U = mgy$  as we did in part (a), we end up with gravitational potential energy equal to  $mg(-x)$  at that bottom-most point, where the spring (with spring constant  $k = 1.5 \times 10^5$  N/m) is fully compressed.

$$K = mg(-x) + \frac{1}{2}kx^2 + fx$$

where  $K = \frac{1}{2}mv^2 = 4.9 \times 10^4$  J using the speed found in part (a). Using the abbreviation  $\xi = mg - f = 1.3 \times 10^4$  N, the quadratic formula yields

$$x = \frac{\xi \pm \sqrt{\xi^2 + 2kK}}{k} = 0.90 \text{ m}$$

where we have taken the positive root.

(c) We relate the energy at the bottom-most point to that of the highest point of rebound (a distance  $d'$  above the relaxed position of the spring). We assume  $d' > x$ . We now use the bottom-most point as the reference level for computing gravitational potential energy.

$$\frac{1}{2}kx^2 = mgd' + fd' \Rightarrow d' = \frac{kx^2}{2(mg + d)} = 2.8 \text{ m}.$$

(d) The non-conservative force (§8-1) is friction, and the energy term associated with it is the one that keeps track of the total distance traveled (whereas the potential energy terms, coming as they do from conservative forces, depend on positions — but not on the paths that led to them). We assume the elevator comes to final rest at the equilibrium position of the spring, with the spring compressed an amount  $d_{\text{eq}}$  given by

$$mg = kd_{\text{eq}} \Rightarrow d_{\text{eq}} = \frac{mg}{k} = 0.12 \text{ m}.$$

In this part, we use that final-rest point as the reference level for computing gravitational potential energy, so the original  $U = mgy$  becomes  $mg(d_{\text{eq}} + d)$ . In that final position, then, the gravitational energy is zero and the spring energy is  $kd_{\text{eq}}^2 / 2$ . Thus, Eq. 8-33 becomes

$$mg(d_{\text{eq}} + d) = \frac{1}{2}kd_{\text{eq}}^2 + fd_{\text{total}}$$

$$(1800)(9.8)(0.12 + 3.7) = \frac{1}{2}(1.5 \times 10^5)(0.12)^2 + (4400)d_{\text{total}}$$

which yields  $d_{\text{total}} = 15 \text{ m}$ .



66. (a) Since the speed of the crate of mass  $m$  increases from 0 to 1.20 m/s relative to the factory ground, the kinetic energy supplied to it is

$$K = \frac{1}{2}mv^2 = \frac{1}{2}(300 \text{ kg})(1.20 \text{ m/s})^2 = 216 \text{ J}.$$

(b) The magnitude of the kinetic frictional force is

$$f = \mu F_N = \mu mg = (0.400)(300 \text{ kg})(9.8 \text{ m/s}^2) = 1.18 \times 10^3 \text{ N}.$$

(c) Let the distance the crate moved relative to the conveyor belt before it stops slipping be  $d$ , then from Eq. 2-16 ( $v^2 = 2ad = 2(f/m)d$ ) we find

$$\Delta E_{\text{th}} = fd = \frac{1}{2}mv^2 = K.$$

Thus, the total energy that must be supplied by the motor is

$$W = K + \Delta E_{\text{th}} = 2K = (2)(216 \text{ J}) = 432 \text{ J}.$$

(d) The energy supplied by the motor is the work  $W$  it does on the system, and must be greater than the kinetic energy gained by the crate computed in part (b). This is due to the fact that part of the energy supplied by the motor is being used to compensate for the energy dissipated  $\Delta E_{\text{th}}$  while it was slipping.

67. (a) The assumption is that the slope of the bottom of the slide is horizontal, like the ground. A useful analogy is that of the pendulum of length  $R = 12$  m that is pulled leftward to an angle  $\theta$  (corresponding to being at the top of the slide at height  $h = 4.0$  m) and released so that the pendulum swings to the lowest point (zero height) gaining speed  $v = 6.2$  m/s. Exactly as we would analyze the trigonometric relations in the pendulum problem, we find

$$h = R(1 - \cos \theta) \Rightarrow \theta = \cos^{-1} \left( 1 - \frac{h}{R} \right) = 48^\circ$$

or 0.84 radians. The slide, representing a circular arc of length  $s = R\theta$ , is therefore  $(12 \text{ m})(0.84) = 10$  m long.

(b) To find the magnitude  $f$  of the frictional force, we use Eq. 8-31 (with  $W = 0$ ):

$$\begin{aligned} 0 &= \Delta K + \Delta U + \Delta E_{\text{th}} \\ &= \frac{1}{2}mv^2 - mgh + fs \end{aligned}$$

so that (with  $m = 25$  kg) we obtain  $f = 49$  N.

(c) The assumption is no longer that the slope of the bottom of the slide is horizontal, but rather that the slope of the top of the slide is vertical (and 12 m to the left of the center of curvature). Returning to the pendulum analogy, this corresponds to releasing the pendulum from horizontal (at  $\theta_1 = 90^\circ$  measured from vertical) and taking a snapshot of its motion a few moments later when it is at angle  $\theta_2$  with speed  $v = 6.2$  m/s. The difference in height between these two positions is (just as we would figure for the pendulum of length  $R$ )

$$\Delta h = R(1 - \cos \theta_2) - R(1 - \cos \theta_1) = -R \cos \theta_2$$

where we have used the fact that  $\cos \theta_1 = 0$ . Thus, with  $\Delta h = -4.0$  m, we obtain  $\theta_2 = 70.5^\circ$  which means the arc subtends an angle of  $|\Delta \theta| = 19.5^\circ$  or 0.34 radians. Multiplying this by the radius gives a slide length of  $s' = 4.1$  m.

(d) We again find the magnitude  $f'$  of the frictional force by using Eq. 8-31 (with  $W = 0$ ):

$$\begin{aligned} 0 &= \Delta K + \Delta U + \Delta E_{\text{th}} \\ &= \frac{1}{2}mv^2 - mgh + f's' \end{aligned}$$

so that we obtain  $f' = 1.2 \times 10^2$  N.

68. We use conservation of mechanical energy: the mechanical energy must be the same at the top of the swing as it is initially. Newton's second law is used to find the speed, and hence the kinetic energy, at the top. There the tension force  $T$  of the string and the force of gravity are both downward, toward the center of the circle. We notice that the radius of the circle is  $r = L - d$ , so the law can be written

$$T + mg = mv^2 / (L - d),$$

where  $v$  is the speed and  $m$  is the mass of the ball. When the ball passes the highest point with the least possible speed, the tension is zero. Then

$$mg = m \frac{v^2}{L - d} \Rightarrow v = \sqrt{g(L - d)}.$$

We take the gravitational potential energy of the ball-Earth system to be zero when the ball is at the bottom of its swing. Then the initial potential energy is  $mgL$ . The initial kinetic energy is zero since the ball starts from rest. The final potential energy, at the top of the swing, is  $2mg(L - d)$  and the final kinetic energy is  $\frac{1}{2}mv^2 = \frac{1}{2}mg(L - d)$  using the above result for  $v$ . Conservation of energy yields

$$mgL = 2mg(L - d) + \frac{1}{2}mg(L - d) \Rightarrow d = 3L/5.$$

With  $L = 1.20$  m, we have  $d = 0.60(1.20 \text{ m}) = 0.72$  m.

Notice that if  $d$  is greater than this value, so the highest point is lower, then the speed of the ball is greater as it reaches that point and the ball passes the point. If  $d$  is less, the ball cannot go around. Thus the value we found for  $d$  is a lower limit.

69. There is the same potential energy change in both circumstances, so we can equate the kinetic energy changes as well:

$$\Delta K_2 = \Delta K_1 \Rightarrow \frac{1}{2} m v_B^2 - \frac{1}{2} m (4.00 \text{ m/s})^2 = \frac{1}{2} m (2.60 \text{ m/s})^2 - \frac{1}{2} m (2.00 \text{ m/s})^2$$

which leads to  $v_B = 4.33 \text{ m/s}$ .

70. (a) To stretch the spring an external force, equal in magnitude to the force of the spring but opposite to its direction, is applied. Since a spring stretched in the positive  $x$  direction exerts a force in the negative  $x$  direction, the applied force must be  $F = 52.8x + 38.4x^2$ , in the  $+x$  direction. The work it does is

$$W = \int_{0.50}^{1.00} (52.8x + 38.4x^2) dx = \left( \frac{52.8}{2} x^2 + \frac{38.4}{3} x^3 \right) \bigg|_{0.50}^{1.00} = 31.0 \text{ J}.$$

(b) The spring does 31.0 J of work and this must be the increase in the kinetic energy of the particle. Its speed is then

$$v = \sqrt{\frac{2K}{m}} = \sqrt{\frac{2(31.0 \text{ J})}{2.17 \text{ kg}}} = 5.35 \text{ m/s}.$$

(c) The force is conservative since the work it does as the particle goes from any point  $x_1$  to any other point  $x_2$  depends only on  $x_1$  and  $x_2$ , not on details of the motion between  $x_1$  and  $x_2$ .

71. This can be worked entirely by the methods of Chapters 2–6, but we will use energy methods in as many steps as possible.

(a) By a force analysis in the style of Chapter 6, we find the normal force has magnitude  $F_N = mg \cos \theta$  (where  $\theta = 39^\circ$ ) which means  $f_k = \mu_k mg \cos \theta$  where  $\mu_k = 0.28$ . Thus, Eq. 8-31 yields

$$\Delta E_{\text{th}} = f_k d = \mu_k mgd \cos \theta.$$

Also, elementary trigonometry leads us to conclude that  $\Delta U = -mgd \sin \theta$  where  $d = 3.7 \text{ m}$ . Since  $K_i = 0$ , Eq. 8-33 (with  $W = 0$ ) indicates that the final kinetic energy is

$$K_f = -\Delta U - \Delta E_{\text{th}} = mgd (\sin \theta - \mu_k \cos \theta)$$

which leads to the speed at the bottom of the ramp

$$v = \sqrt{\frac{2K_f}{m}} = \sqrt{2gd (\sin \theta - \mu_k \cos \theta)} = 5.5 \text{ m/s}.$$

(b) This speed begins its horizontal motion, where  $f_k = \mu_k mg$  and  $\Delta U = 0$ . It slides a distance  $d'$  before it stops. According to Eq. 8-31 (with  $W = 0$ ),

$$\begin{aligned} 0 &= \Delta K + \Delta U + \Delta E_{\text{th}} \\ &= 0 - \frac{1}{2}mv^2 + 0 + \mu_k mgd' \\ &= -\frac{1}{2}(2gd (\sin \theta - \mu_k \cos \theta)) + \mu_k gd' \end{aligned}$$

where we have divided by mass and substituted from part (a) in the last step. Therefore,

$$d' = \frac{d(\sin \theta - \mu_k \cos \theta)}{\mu_k} = 5.4 \text{ m}.$$

(c) We see from the algebraic form of the results, above, that the answers do not depend on mass. A 90 kg crate should have the same speed at the bottom and sliding distance across the floor, to the extent that the friction relations in Ch. 6 are accurate. Interestingly, since  $g$  does not appear in the relation for  $d'$ , the sliding distance would seem to be the same if the experiment were performed on Mars!

72. (a) At  $B$  the speed is (from Eq. 8-17)

$$v = \sqrt{v_0^2 + 2gh_1} = \sqrt{(7.0 \text{ m/s})^2 + 2(9.8 \text{ m/s}^2)(6.0 \text{ m})} = 13 \text{ m/s}.$$

(a) Here what matters is the difference in heights (between  $A$  and  $C$ ):

$$v = \sqrt{v_0^2 + 2g(h_1 - h_2)} = \sqrt{(7.0 \text{ m/s})^2 + 2(9.8 \text{ m/s}^2)(4.0 \text{ m})} = 11.29 \text{ m/s} \approx 11 \text{ m/s}.$$

(c) Using the result from part (b), we see that its kinetic energy right at the beginning of its “rough slide” (heading horizontally towards  $D$ ) is  $\frac{1}{2} m(11.29 \text{ m/s})^2 = 63.7m$  (with SI units understood). Note that we “carry along” the mass (as if it were a known quantity); as we will see, it will cancel out, shortly. Using Eq. 8-31 (and Eq. 6-2 with  $F_N = mg$ ) we note that this kinetic energy will turn entirely into thermal energy

$$63.7m = \mu_k mgd$$

if  $d < L$ . With  $\mu_k = 0.70$ , we find  $d = 9.3 \text{ m}$ , which is indeed less than  $L$  (given in the problem as  $12 \text{ m}$ ). We conclude that the block stops before passing out of the “rough” region (and thus does not arrive at point  $D$ ).

73. (a) By mechanical energy conversation, the kinetic energy as it reaches the floor (which we choose to be the  $U = 0$  level) is the sum of the initial kinetic and potential energies:

$$K = K_i + U_i = \frac{1}{2} (2.50 \text{ kg})(3.00 \text{ m/s})^2 + (2.50 \text{ kg})(9.80 \text{ m/s}^2)(4.00 \text{ m}) = 109 \text{ J}.$$

For later use, we note that the speed with which it reaches the ground is

$$v = \sqrt{2K/m} = 9.35 \text{ m/s}.$$

(b) When the drop in height is 2.00 m instead of 4.00 m, the kinetic energy is

$$K = \frac{1}{2} (2.50 \text{ kg})(3.00 \text{ m/s})^2 + (2.50 \text{ kg})(9.80 \text{ m/s}^2)(2.00 \text{ m}) = 60.3 \text{ J}.$$

(c) A simple way to approach this is to imagine the can is *launched* from the ground at  $t = 0$  with speed 9.35 m/s (see above) and ask of its height and speed at  $t = 0.200 \text{ s}$ , using Eq. 2-15 and Eq. 2-11:

$$y = (9.35 \text{ m/s})(0.200 \text{ s}) - \frac{1}{2} (9.80 \text{ m/s}^2)(0.200 \text{ s})^2 = 1.67 \text{ m},$$

$$v = 9.35 \text{ m/s} - (9.80 \text{ m/s}^2)(0.200 \text{ s}) = 7.39 \text{ m/s}.$$

The kinetic energy is

$$K = \frac{1}{2} (2.50 \text{ kg}) (7.39 \text{ m/s})^2 = 68.2 \text{ J}.$$

(d) The gravitational potential energy

$$U = mgy = (2.5 \text{ kg})(9.8 \text{ m/s}^2)(1.67 \text{ m}) = 41.0 \text{ J}$$



74. (a) The initial kinetic energy is  $K_i = \frac{1}{2}(1.5)(3)^2 = 6.75 \text{ J}$ .

(b) The work of gravity is the negative of its change in potential energy. At the highest point, all of  $K_i$  has converted into  $U$  (if we neglect air friction) so we conclude the work of gravity is  $-6.75 \text{ J}$ .

(c) And we conclude that  $\Delta U = 6.75 \text{ J}$ .

(d) The potential energy there is  $U_f = U_i + \Delta U = 6.75 \text{ J}$ .

(e) If  $U_f = 0$ , then  $U_i = U_f - \Delta U = -6.75 \text{ J}$ .

(f) Since  $mg\Delta y = \Delta U$ , we obtain  $\Delta y = 0.459 \text{ m}$ .

75. We note that if the larger mass (block B,  $m_B = 2$  kg) falls  $d = 0.25$  m, then the smaller mass (blocks A,  $m_A = 1$  kg) must increase its height by  $h = d \sin 30^\circ$ . Thus, by mechanical energy conservation, the kinetic energy of the system is

$$K_{\text{total}} = m_B g d - m_A g h = 3.7 \text{ J}.$$

76. (a) At the point of maximum height, where  $y = 140$  m, the vertical component of velocity vanishes but the horizontal component remains what it was when it was launched (if we neglect air friction). Its kinetic energy at that moment is

$$K = \frac{1}{2}(0.55 \text{ kg})v_x^2.$$

Also, its potential energy (with the reference level chosen at the level of the cliff edge) at that moment is  $U = mgy = 755$  J. Thus, by mechanical energy conservation,

$$K = K_i - U = 1550 - 755 \Rightarrow v_x = \sqrt{\frac{2(1550 - 755)}{0.55}} = 54 \text{ m/s}.$$

(b) As mentioned  $v_x = v_{ix}$  so that the initial kinetic energy

$$K_i = \frac{1}{2}m(v_{ix}^2 + v_{iy}^2)$$

can be used to find  $v_{iy}$ . We obtain  $v_{iy} = 52$  m/s.


(c) Applying Eq. 2-16 to the vertical direction (with  $+y$  upward), we have

$$v_y^2 = v_{iy}^2 - 2g\Delta y \Rightarrow (65 \text{ m/s})^2 = (52 \text{ m/s})^2 - 2(9.8 \text{ m/s}^2)\Delta y$$

which yields  $\Delta y = -76$  m. The minus sign tells us it is below its launch point.

77. The work done by  $\vec{F}$  is the negative of its potential energy change (see Eq. 8-6), so  $U_B = U_A - 25 = 15$  J.

78. The free-body diagram for the trunk is shown.

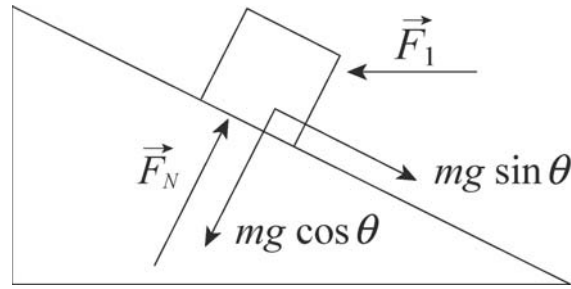

The  $x$  and  $y$  applications of Newton's second law provide two equations:

$$F_1 \cos \theta - f_k - mg \sin \theta = ma$$

$$F_N - F_1 \sin \theta - mg \cos \theta = 0.$$

(a) The trunk is moving up the incline at constant velocity, so  $a = 0$ . Using  $f_k = \mu_k F_N$ , we solve for the push-force  $F_1$  and obtain

$$F_1 = \frac{mg(\sin \theta + \mu_k \cos \theta)}{\cos \theta - \mu_k \sin \theta}.$$

The work done by the push-force  $\vec{F}_1$  as the trunk is pushed through a distance  $\ell$  up the inclined plane is therefore

$$\begin{aligned} W_1 &= F_1 \ell \cos \theta = \frac{(mg \ell \cos \theta)(\sin \theta + \mu_k \cos \theta)}{\cos \theta - \mu_k \sin \theta} \\ &= \frac{(50 \text{ kg})(9.8 \text{ m/s}^2)(6.0 \text{ m})(\cos 30^\circ)(\sin 30^\circ + (0.20) \cos 30^\circ)}{\cos 30^\circ - (0.20) \sin 30^\circ} \\ &= 2.2 \times 10^3 \text{ J.} \end{aligned}$$

(b) The increase in the gravitational potential energy of the trunk is

$$\Delta U = mg \ell \sin \theta = (50 \text{ kg})(9.8 \text{ m/s}^2)(6.0 \text{ m}) \sin 30^\circ = 1.5 \times 10^3 \text{ J.}$$

Since the speed (and, therefore, the kinetic energy) of the trunk is unchanged, Eq. 8-33 leads to

$$W_1 = \Delta U + \Delta E_{\text{th}}.$$

Thus, using more precise numbers than are shown above, the increase in thermal energy (generated by the kinetic friction) is  $2.24 \times 10^3 \text{ J} - 1.47 \times 10^3 \text{ J} = 7.7 \times 10^2 \text{ J}$ . An alternate way to this result is to use  $\Delta E_{\text{th}} = f_k \ell$  (Eq. 8-31).

79. The initial height of the  $2M$  block, shown in Fig. 8-64, is the  $y = 0$  level in our computations of its value of  $U_g$ . As that block drops, the spring stretches accordingly. Also, the kinetic energy  $K_{sys}$  is evaluated for the *system* -- that is, for a total moving mass of  $3M$ .

(a) The conservation of energy, Eq. 8-17, leads to

$$K_i + U_i = K_{sys} + U_{sys} \Rightarrow 0 + 0 = K_{sys} + (2M)g(-0.090) + \frac{1}{2} k(0.090)^2.$$

Thus, with  $M = 2.0$  kg, we obtain  $K_{sys} = 2.7$  J.

(b) The kinetic energy of the  $2M$  block represents a fraction of the total kinetic energy:

$$\frac{K_{2M}}{K_{sys}} = \frac{(2M)v^2 / 2}{(3M)v^2 / 2} = \frac{2}{3}.$$

Therefore,  $K_{2M} = \frac{2}{3}(2.7 \text{ J}) = 1.8 \text{ J}$ .

(c) Here we let  $y = -d$  and solve for  $d$ .

$$K_i + U_i = K_{sys} + U_{sys} \Rightarrow 0 + 0 = 0 + (2M)g(-d) + \frac{1}{2} kd^2.$$

Thus, with  $M = 2.0$  kg, we obtain  $d = 0.39$  m.

80. Sample Problem 8-3 illustrates simple energy conservation in a similar situation, and derives the frequently encountered relationship:  $v = \sqrt{2gh}$ . In our present problem, the height is related to the distance (on the  $\theta = 10^\circ$  slope)  $d = 920$  m by the trigonometric relation  $h = d \sin \theta$ . Thus,

$$v = \sqrt{2(9.8 \text{ m/s}^2)(920 \text{ m}) \sin 10^\circ} = 56 \text{ m/s}.$$

81. Eq. 8-33 gives  $mgy_f = K_i + mgy_i - \Delta E_{\text{th}}$ , or

$$(0.50 \text{ kg})(9.8 \text{ m/s}^2)(0.80 \text{ m}) = \frac{1}{2} (0.50 \text{ kg})(4.00 \text{ /s})^2 + (0.50 \text{ kg})(9.8 \text{ m/s}^2)(0) - \Delta E_{\text{th}}$$

which yields  $\Delta E_{\text{th}} = 4.00 \text{ J} - 3.92 \text{ J} = 0.080 \text{ J}$ .



82. (a) The loss of the initial  $K = \frac{1}{2} mv^2 = \frac{1}{2} (70 \text{ kg})(10 \text{ m/s})^2$  is 3500 J, or 3.5 kJ.

(b) This is dissipated as thermal energy;  $\Delta E_{\text{th}} = 3500 \text{ J} = 3.5 \text{ kJ}$ .

83. The initial height shown in the figure is the  $y = 0$  level in our computations of  $U_g$ , and in parts (a) and (b) the heights are  $y_a = (0.80 \text{ m}) \sin 40^\circ = 0.51 \text{ m}$  and  $y_b = (1.00 \text{ m}) \sin 40^\circ = 0.64 \text{ m}$ , respectively.

(a) The conservation of energy, Eq. 8-17, leads to

$$K_i + U_i = K_a + U_a \Rightarrow 16 \text{ J} + 0 = K_a + mgy_a + \frac{1}{2}k(0.20 \text{ m})^2$$

from which we obtain  $K_a = (16 - 5.0 - 4.0) \text{ J} = 7.0 \text{ J}$ .

(b) Again we use the conservation of energy

$$K_i + U_i = K_b + U_b \Rightarrow K_i + 0 = 0 + mgy_b + \frac{1}{2}k(0.40 \text{ m})^2$$

from which we obtain  $K_i = 6.0 \text{ J} + 16 \text{ J} = 22 \text{ J}$ .

84. (a) Eq. 8-9 gives  $U = (3.2 \text{ kg})(9.8 \text{ m/s}^2)(3.0 \text{ m}) = 94 \text{ J}$ .

(b) The mechanical energy is conserved, so  $K = 94 \text{ J}$ .

(c) The speed (from solving Eq. 7-1) is  $v = \sqrt{2(94 \text{ J})/(32 \text{ kg})} = 7.7 \text{ m/s}$ .

85. (a) Resolving the gravitational force into components and applying Newton's second law (as well as Eq. 6-2), we find

$$F_{\text{machine}} - mg\sin\theta - \mu_k mg\cos\theta = ma.$$

In the situation described in the problem, we have  $a = 0$ , so

$$F_{\text{machine}} = mg\sin\theta + \mu_k mg\cos\theta = 372 \text{ N}.$$

Thus, the work done by the machine is  $F_{\text{machine}}d = 744 \text{ J} = 7.4 \times 10^2 \text{ J}$ .

(b) The thermal energy generated is  $\mu_k mg\cos\theta d = 240 \text{ J} = 2.4 \times 10^2 \text{ J}$ .

86. We use  $P = Fv$  to compute the force:

$$F = \frac{P}{v} = \frac{92 \times 10^6 \text{ W}}{(32.5 \text{ knot}) \left( 1.852 \frac{\text{km/h}}{\text{knot}} \right) \left( \frac{1000 \text{ m/km}}{3600 \text{ s/h}} \right)} = 5.5 \times 10^6 \text{ N}.$$

87. Since the speed is constant  $\Delta K = 0$  and Eq. 8-33 (an application of the energy conservation concept) implies

$$W_{\text{applied}} = \Delta E_{\text{th}} = \Delta E_{\text{th(cube)}} + \Delta E_{\text{th(floor)}}.$$

Thus, if  $W_{\text{applied}} = (15 \text{ N})(3.0 \text{ m}) = 45 \text{ J}$ , and we are told that  $\Delta E_{\text{th(cube)}} = 20 \text{ J}$ , then we conclude that  $\Delta E_{\text{th(floor)}} = 25 \text{ J}$ .

88. (a) We take the gravitational potential energy of the skier-Earth system to be zero when the skier is at the bottom of the peaks. The initial potential energy is  $U_i = mgH$ , where  $m$  is the mass of the skier, and  $H$  is the height of the higher peak. The final potential energy is  $U_f = mgh$ , where  $h$  is the height of the lower peak. The skier initially has a kinetic energy of  $K_i = 0$ , and the final kinetic energy is  $K_f = \frac{1}{2}mv^2$ , where  $v$  is the speed of the skier at the top of the lower peak. The normal force of the slope on the skier does no work and friction is negligible, so mechanical energy is conserved:

$$U_i + K_i = U_f + K_f \Rightarrow mgH = mgh + \frac{1}{2}mv^2$$

Thus,

$$v = \sqrt{2g(H-h)} = \sqrt{2(9.8 \text{ m/s}^2)(850 \text{ m} - 750 \text{ m})} = 44 \text{ m/s}.$$

(b) We recall from analyzing objects sliding down inclined planes that the normal force of the slope on the skier is given by  $F_N = mg \cos \theta$ , where  $\theta$  is the angle of the slope from the horizontal,  $30^\circ$  for each of the slopes shown. The magnitude of the force of friction is given by  $f = \mu_k F_N = \mu_k mg \cos \theta$ . The thermal energy generated by the force of friction is  $fd = \mu_k mgd \cos \theta$ , where  $d$  is the total distance along the path. Since the skier gets to the top of the lower peak with no kinetic energy, the increase in thermal energy is equal to the decrease in potential energy. That is,  $\mu_k mgd \cos \theta = mg(H-h)$ . Consequently,

$$\mu_k = \frac{H-h}{d \cos \theta} = \frac{(850 \text{ m} - 750 \text{ m})}{(3.2 \times 10^3 \text{ m}) \cos 30^\circ} = 0.036.$$

89. To swim at constant velocity the swimmer must push back against the water with a force of 110 N. Relative to him the water is going at 0.22 m/s toward his rear, in the same direction as his force. Using Eq. 7-48, his power output is obtained:

$$P = \vec{F} \cdot \vec{v} = Fv = (110 \text{ N})(0.22 \text{ m/s}) = 24 \text{ W}.$$



90. The initial kinetic energy of the automobile of mass  $m$  moving at speed  $v_i$  is  $K_i = \frac{1}{2}mv_i^2$ , where  $m = 16400/9.8 = 1673$  kg. Using Eq. 8-31 and Eq. 8-33, this relates to the effect of friction force  $f$  in stopping the auto over a distance  $d$  by  $K_i = fd$ , where the road is assumed level (so  $\Delta U = 0$ ). With

$$v_i = (113 \text{ km/h}) = (113 \text{ km/h})(1000 \text{ m/km})(1 \text{ h}/3600 \text{ s}) = 31.4 \text{ m/s},$$

we obtain

$$d = \frac{K_i}{f} = \frac{mv_i^2}{2f} = \frac{(1673 \text{ kg})(31.4 \text{ m/s})^2}{2(8230 \text{ N})} = 100 \text{ m}.$$

91. With the potential energy reference level set at the point of throwing, we have (with SI units understood)

$$\Delta E = mgh - \frac{1}{2}mv_0^2 = m\left((9.8)(8.1) - \frac{1}{2}(14)^2\right)$$

which yields  $\Delta E = -12$  J for  $m = 0.63$  kg. This “loss” of mechanical energy is presumably due to air friction.

92. (a) The (internal) energy the climber must convert to gravitational potential energy is

$$\Delta U = mgh = (90 \text{ kg})(9.80 \text{ m/s}^2)(8850 \text{ m}) = 7.8 \times 10^6 \text{ J}.$$

(b) The number of candy bars this corresponds to is

$$N = \frac{7.8 \times 10^6 \text{ J}}{1.25 \times 10^6 \text{ J/bar}} \approx 6.2 \text{ bars}.$$

93. (a) The acceleration of the sprinter is (using Eq. 2-15)

$$a = \frac{2\Delta x}{t^2} = \frac{(2)(7.0 \text{ m})}{(1.6 \text{ s})^2} = 5.47 \text{ m/s}^2.$$

Consequently, the speed at  $t = 1.6 \text{ s}$  is  $v = at = (5.47 \text{ m/s}^2)(1.6 \text{ s}) = 8.8 \text{ m/s}$ . Alternatively, Eq. 2-17 could be used.

(b) The kinetic energy of the sprinter (of weight  $w$  and mass  $m = w/g$ ) is

$$K = \frac{1}{2}mv^2 = \frac{1}{2}\left(\frac{w}{g}\right)v^2 = \frac{1}{2}(670 \text{ N}/(9.8 \text{ m/s}^2))(8.8 \text{ m/s})^2 = 2.6 \times 10^3 \text{ J}.$$

(c) The average power is

$$P_{\text{avg}} = \frac{\Delta K}{\Delta t} = \frac{2.6 \times 10^3 \text{ J}}{1.6 \text{ s}} = 1.6 \times 10^3 \text{ W}.$$

94. We note that in one second, the block slides  $d = 1.34$  m up the incline, which means its height increase is  $h = d \sin \theta$  where

$$\theta = \tan^{-1}\left(\frac{30}{40}\right) = 37^\circ.$$

We also note that the force of kinetic friction in this inclined plane problem is  $f_k = \mu_k mg \cos \theta$ , where  $\mu_k = 0.40$  and  $m = 1400$  kg. Thus, using Eq. 8-31 and Eq. 8-33, we find

$$W = mgh + f_k d = mgd(\sin \theta + \mu_k \cos \theta)$$

or  $W = 1.69 \times 10^4$  J for this one-second interval. Thus, the power associated with this is

$$P = \frac{1.69 \times 10^4 \text{ J}}{1 \text{ s}} = 1.69 \times 10^4 \text{ W} \approx 1.7 \times 10^4 \text{ W}.$$

95. (a) The initial kinetic energy is  $K_i = (1.5 \text{ kg})(20 \text{ m/s})^2 / 2 = 300 \text{ J}$ .

(b) At the point of maximum height, the vertical component of velocity vanishes but the horizontal component remains what it was when it was “shot” (if we neglect air friction). Its kinetic energy at that moment is

$$K = \frac{1}{2}(1.5 \text{ kg})[(20 \text{ m/s}) \cos 34^\circ]^2 = 206 \text{ J}.$$

Thus,  $\Delta U = K_i - K = 300 \text{ J} - 206 \text{ J} = 93.8 \text{ J}$ .

(c) Since  $\Delta U = mg \Delta y$ , we obtain

$$\Delta y = \frac{94 \text{ J}}{(1.5 \text{ kg})(9.8 \text{ m/s}^2)} = 6.38 \text{ m}.$$

96. From Eq. 8-6, we find (with SI units understood)

$$U(\xi) = - \int_0^\xi (-3x - 5x^2) dx = \frac{3}{2}\xi^2 + \frac{5}{3}\xi^3.$$

(a) Using the above formula, we obtain  $U(2) \approx 19$  J.

(b) When its speed is  $v = 4$  m/s, its mechanical energy is  $\frac{1}{2}mv^2 + U(5)$ . This must equal the energy at the origin:

$$\frac{1}{2}mv^2 + U(5) = \frac{1}{2}mv_o^2 + U(0)$$

so that the speed at the origin is

$$v_o = \sqrt{v^2 + \frac{2}{m}(U(5) - U(0))}.$$

Thus, with  $U(5) = 246$  J,  $U(0) = 0$  and  $m = 20$  kg, we obtain  $v_o = 6.4$  m/s.

(c) Our original formula for  $U$  is changed to

$$U(x) = -8 + \frac{3}{2}x^2 + \frac{5}{3}x^3$$

in this case. Therefore,  $U(2) = 11$  J. But we still have  $v_o = 6.4$  m/s since that calculation only depended on the difference of potential energy values (specifically,  $U(5) - U(0)$ ).

97. Eq. 8-8 leads directly to  $\Delta y = \frac{68000 \text{ J}}{(9.4 \text{ kg})(9.8 \text{ m/s}^2)} = 738 \text{ m}.$



98. Since the period  $T$  is  $(2.5 \text{ rev/s})^{-1} = 0.40 \text{ s}$ , then Eq. 4-33 leads to  $v = 3.14 \text{ m/s}$ . The frictional force has magnitude (using Eq. 6-2)

$$f = \mu_k F_N = (0.320)(180 \text{ N}) = 57.6 \text{ N}.$$

The power dissipated by the friction must equal that supplied by the motor, so Eq. 7-48 gives  $P = (57.6 \text{ N})(3.14 \text{ m/s}) = 181 \text{ W}$ .

99. (a) In the initial situation, the elongation was (using Eq. 8-11)

$$x_i = \sqrt{2(1.44)/3200} = 0.030 \text{ m (or 3.0 cm)}.$$

In the next situation, the elongation is only 2.0 cm (or 0.020 m), so we now have less stored energy (relative to what we had initially). Specifically,

$$\Delta U = \frac{1}{2} (3200 \text{ N/m})(0.020 \text{ m})^2 - 1.44 \text{ J} = -0.80 \text{ J}.$$

(b) The elastic stored energy for  $|x| = 0.020 \text{ m}$ , does not depend on whether this represents a stretch or a compression. The answer is the same as in part (a),  $\Delta U = -0.80 \text{ J}$ .

(c) Now we have  $|x| = 0.040 \text{ m}$  which is greater than  $x_i$ , so this represents an increase in the potential energy (relative to what we had initially). Specifically,

$$\Delta U = \frac{1}{2} (3200 \text{ N/m})(0.040 \text{ m})^2 - 1.44 \text{ J} = +1.12 \text{ J} \approx 1.1 \text{ J}.$$

100. (a) At the highest point, the velocity  $v = v_x$  is purely horizontal and is equal to the horizontal component of the launch velocity (see section 4-6):  $v_{ox} = v_o \cos \theta$ , where  $\theta = 30^\circ$  in this problem. Eq. 8-17 relates the kinetic energy at the highest point to the launch kinetic energy:

$$K_o = mgy + \frac{1}{2} mv^2 = \frac{1}{2} mv_{ox}^2 + \frac{1}{2} mv_{oy}^2.$$

with  $y = 1.83$  m. Since the  $mv_{ox}^2/2$  term on the left-hand side cancels the  $mv^2/2$  term on the right-hand side, this yields  $v_{oy} = \sqrt{2gy} \approx 6$  m/s. With  $v_{oy} = v_o \sin \theta$ , we obtain

$$v_o = 11.98 \text{ m/s} \approx 12 \text{ m/s}.$$

(b) Energy conservation (including now the energy stored elastically in the spring, Eq. 8-11) also applies to the motion along the muzzle (through a distance  $d$  which corresponds to a vertical height increase of  $d \sin \theta$ ):

$$\frac{1}{2} kd^2 = K_o + mg d \sin \theta \quad \Rightarrow \quad d = 0.11 \text{ m}.$$

101. (a) We implement Eq. 8-37 as

$$K_f = K_i + mgy_i - f_k d = 0 + (60 \text{ kg})(9.8 \text{ m/s}^2)(4.0 \text{ m}) - 0 = 2.35 \times 10^3 \text{ J}.$$

(b) Now it applies with a nonzero thermal term:

$$K_f = K_i + mgy_i - f_k d = 0 + (60 \text{ kg})(9.8 \text{ m/s}^2)(4.0 \text{ m}) - (500 \text{ N})(4.0 \text{ m}) = 352 \text{ J}.$$

102. (a) We assume his mass is between  $m_1 = 50$  kg and  $m_2 = 70$  kg (corresponding to a weight between 110 lb and 154 lb). His increase in gravitational potential energy is therefore in the range

$$m_1gh \leq \Delta U \leq m_2gh \Rightarrow 2 \times 10^5 \leq \Delta U \leq 3 \times 10^5$$

in SI units (J), where  $h = 443$  m.

(b) The problem only asks for the amount of internal energy which converts into gravitational potential energy, so this result is the same as in part (a). But if we were to consider his *total* internal energy “output” (much of which converts to heat) we can expect that external climb is quite different from taking the stairs.

103. We use SI units so  $m = 0.030$  kg and  $d = 0.12$  m.

(a) Since there is no change in height (and we assume no changes in elastic potential energy), then  $\Delta U = 0$  and we have

$$\Delta E_{\text{mech}} = \Delta K = -\frac{1}{2} m v_0^2 = -3.8 \times 10^3 \text{ J.}$$

where  $v_0 = 500$  m/s and the final speed is zero.

(b) By Eq. 8-33 (with  $W = 0$ ) we have  $\Delta E_{\text{th}} = 3.8 \times 10^3$  J, which implies

$$f = \frac{\Delta E_{\text{th}}}{d} = 3.1 \times 10^4 \text{ N}$$

using Eq. 8-31 with  $f_k$  replaced by  $f$  (effectively generalizing that equation to include a greater variety of dissipative forces than just those obeying Eq. 6-2).

104. We work this in SI units and convert to horsepower in the last step. Thus,

$$v = (80 \text{ km/h}) \left( \frac{1000 \text{ m/km}}{3600 \text{ s/h}} \right) = 22.2 \text{ m/s}.$$

The force  $F_P$  needed to propel the car (of weight  $w$  and mass  $m = w/g$ ) is found from Newton's second law:

$$F_{\text{net}} = F_P - F = ma = \frac{wa}{g}$$

where  $F = 300 + 1.8v^2$  in SI units. Therefore, the power required is

$$\begin{aligned} P = \vec{F}_P \cdot \vec{v} &= \left( F + \frac{wa}{g} \right) v = \left( 300 + 1.8(22.2)^2 + \frac{(12000)(0.92)}{9.8} \right) (22.2) = 5.14 \times 10^4 \text{ W} \\ &= (5.14 \times 10^4 \text{ W}) \left( \frac{1 \text{ hp}}{746 \text{ W}} \right) = 69 \text{ hp}. \end{aligned}$$

105. (a) With  $P = 1.5 \text{ MW} = 1.5 \times 10^6 \text{ W}$  (assumed constant) and  $t = 6.0 \text{ min} = 360 \text{ s}$ , the work-kinetic energy theorem becomes

$$W = Pt = \Delta K = \frac{1}{2}m(v_f^2 - v_i^2).$$

The mass of the locomotive is then

$$m = \frac{2Pt}{v_f^2 - v_i^2} = \frac{(2)(1.5 \times 10^6 \text{ W})(360 \text{ s})}{(25 \text{ m/s})^2 - (10 \text{ m/s})^2} = 2.1 \times 10^6 \text{ kg}.$$

(b) With  $t$  arbitrary, we use  $Pt = \frac{1}{2}m(v^2 - v_i^2)$  to solve for the speed  $v = v(t)$  as a function of time and obtain

$$v(t) = \sqrt{v_i^2 + \frac{2Pt}{m}} = \sqrt{(10)^2 + \frac{(2)(1.5 \times 10^6)t}{2.1 \times 10^6}} = \sqrt{100 + 1.5t}$$

in SI units ( $v$  in m/s and  $t$  in s).

(c) The force  $F(t)$  as a function of time is

$$F(t) = \frac{P}{v(t)} = \frac{1.5 \times 10^6}{\sqrt{100 + 1.5t}}$$

in SI units ( $F$  in N and  $t$  in s).

(d) The distance  $d$  the train moved is given by

$$d = \int_0^t v(t') dt' = \int_0^{360} \left(100 + \frac{3}{2}t\right)^{1/2} dt = \frac{4}{9} \left(100 + \frac{3}{2}t\right)^{3/2} \bigg|_0^{360} = 6.7 \times 10^3 \text{ m}.$$



106. We take the bottom of the incline to be the  $y = 0$  reference level. The incline angle is  $\theta = 30^\circ$ . The distance along the incline  $d$  (measured from the bottom) is related to height  $y$  by the relation  $y = d \sin \theta$ .

(a) Using the conservation of energy, we have

$$K_0 + U_0 = K_{\text{top}} + U_{\text{top}} \Rightarrow \frac{1}{2}mv_0^2 + 0 = 0 + mgy$$

with  $v_0 = 5.0 \text{ m/s}$ . This yields  $y = 1.3 \text{ m}$ , from which we obtain  $d = 2.6 \text{ m}$ .

(b) An analysis of forces in the manner of Chapter 6 reveals that the magnitude of the friction force is  $f_k = \mu_k mg \cos \theta$ . Now, we write Eq. 8-33 as

$$\begin{aligned} K_0 + U_0 &= K_{\text{top}} + U_{\text{top}} + f_k d \\ \frac{1}{2}mv_0^2 + 0 &= 0 + mgy + f_k d \\ \frac{1}{2}mv_0^2 &= mgd \sin \theta + \mu_k mgd \cos \theta \end{aligned}$$

which — upon canceling the mass and rearranging — provides the result for  $d$ :

$$d = \frac{v_0^2}{2g(\mu_k \cos \theta + \sin \theta)} = 1.5 \text{ m}.$$

(c) The thermal energy generated by friction is  $f_k d = \mu_k mgd \cos \theta = 26 \text{ J}$ .

(d) The slide back down, from the height  $y = 1.5 \sin 30^\circ$  is also described by Eq. 8-33. With  $\Delta E_{\text{th}}$  again equal to 26 J, we have

$$K_{\text{top}} + U_{\text{top}} = K_{\text{bot}} + U_{\text{bot}} + f_k d \Rightarrow 0 + mgy = \frac{1}{2}mv_{\text{bot}}^2 + 0 + 26$$

from which we find  $v_{\text{bot}} = 2.1 \text{ m/s}$ .

107. (a) The effect of a (sliding) friction is described in terms of energy dissipated as shown in Eq. 8-31. We have

$$\Delta E = K + \frac{1}{2}k(0.08)^2 - \frac{1}{2}k(0.10)^2 = -f_k(0.02)$$

where distances are in meters and energies are in Joules. With  $k = 4000 \text{ N/m}$  and  $f_k = 80 \text{ N}$ , we obtain  $K = 5.6 \text{ J}$ .

(b) In this case, we have  $d = 0.10 \text{ m}$ . Thus,

$$\Delta E = K + 0 - \frac{1}{2}k(0.10)^2 = -f_k(0.10)$$

which leads to  $K = 12 \text{ J}$ .

(c) We can approach this two ways. One way is to examine the dependence of energy on the variable  $d$ :

$$\Delta E = K + \frac{1}{2}k(d_0 - d)^2 - \frac{1}{2}kd_0^2 = -f_k d$$

where  $d_0 = 0.10 \text{ m}$ , and solving for  $K$  as a function of  $d$ :

$$K = -\frac{1}{2}kd^2 + (kd_0)d - f_k d.$$

In this first approach, we could work through the  $\frac{dK}{dd} = 0$  condition (or with the special capabilities of a graphing calculator) to obtain the answer  $K_{\max} = \frac{1}{2k}(kd_0 - f_k)^2$ . In the second (and perhaps easier) approach, we note that  $K$  is maximum where  $v$  is maximum — which is where  $a = 0 \Rightarrow$  equilibrium of forces. Thus, the second approach simply solves for the equilibrium position

$$|F_{\text{spring}}| = f_k \Rightarrow kx = 80.$$

Thus, with  $k = 4000 \text{ N/m}$  we obtain  $x = 0.02 \text{ m}$ . But  $x = d_0 - d$  so this corresponds to  $d = 0.08 \text{ m}$ . Then the methods of part (a) lead to the answer  $K_{\max} = 12.8 \text{ J} \approx 13 \text{ J}$ .

108. We assume his initial kinetic energy (when he jumps) is negligible. Then, his initial gravitational potential energy measured relative to where he momentarily stops is what becomes the elastic potential energy of the stretched net (neglecting air friction). Thus,

$$U_{\text{net}} = U_{\text{grav}} = mgh$$

where  $h = 11.0 \text{ m} + 1.5 \text{ m} = 12.5 \text{ m}$ . With  $m = 70 \text{ kg}$ , we obtain  $U_{\text{net}} = 8580 \text{ J} \approx 8.6 \times 10^3 \text{ J}$ .

109. The connection between angle  $\theta$  (measured from vertical) and height  $h$  (measured from the lowest point, which is our choice of reference position in computing the gravitational potential energy  $mgh$ ) is given by  $h = L(1 - \cos \theta)$  where  $L$  is the length of the pendulum.

(a) Using this formula (or simply using intuition) we see the initial height is  $h_1 = 2L$ , and of course  $h_2 = 0$ . We use energy conservation in the form of Eq. 8-17.

$$\begin{aligned} K_1 + U_1 &= K_2 + U_2 \\ 0 + mg(2L) &= \frac{1}{2}mv^2 + 0 \end{aligned}$$

This leads to  $v = 2\sqrt{gL}$ . With  $L = 0.62$  m, we have

$$v = 2\sqrt{(9.8 \text{ m/s}^2)(0.62 \text{ m})} = 4.9 \text{ m/s}.$$

(b) The ball is in circular motion with the center of the circle above it, so  $\vec{a} = v^2 / r$  upward, where  $r = L$ . Newton's second law leads to

$$T - mg = m \frac{v^2}{r} \Rightarrow T = m \left( g + \frac{4gL}{L} \right) = 5mg.$$

With  $m = 0.092$  kg, the tension is given by  $T = 4.5$  N.

(c) The pendulum is now started (with zero speed) at  $\theta_i = 90^\circ$  (that is,  $h_i = L$ ), and we look for an angle  $\theta$  such that  $T = mg$ . When the ball is moving through a point at angle  $\theta$ , then Newton's second law applied to the axis along the rod yields

$$T - mg \cos \theta = m \frac{v^2}{r}$$

which (since  $r = L$ ) implies  $v^2 = gL(1 - \cos \theta)$  at the position we are looking for. Energy conservation leads to

$$\begin{aligned} K_i + U_i &= K + U \\ 0 + mgL &= \frac{1}{2}mv^2 + mgL(1 - \cos \theta) \\ gL &= \frac{1}{2}(gL(1 - \cos \theta)) + gL(1 - \cos \theta) \end{aligned}$$

where we have divided by mass in the last step. Simplifying, we obtain

$$\theta = \cos^{-1} \left( \frac{1}{3} \right) = 71^\circ.$$

(d) Since the angle found in (c) is independent of the mass, the result remains the same if the mass of the ball is changed.

110. We take her original elevation to be the  $y = 0$  reference level and observe that the top of the hill must consequently have  $y_A = R(1 - \cos 20^\circ) = 1.2$  m, where  $R$  is the radius of the hill. The mass of the skier is  $600/9.8 = 61$  kg.

(a) Applying energy conservation, Eq. 8-17, we have

$$K_B + U_B = K_A + U_A \Rightarrow K_B + 0 = K_A + mgy_A.$$

Using  $K_B = \frac{1}{2}(61 \text{ kg})(8.0 \text{ m/s})^2$ , we obtain  $K_A = 1.2 \times 10^3$  J. Thus, we find the speed at the hilltop is

$$v = \sqrt{2K/m} = 6.4 \text{ m/s}.$$

Note: one might wish to check that the skier stays in contact with the hill — which is indeed the case, here. For instance, at  $A$  we find  $v^2/r \approx 2 \text{ m/s}^2$  which is considerably less than  $g$ .

(b) With  $K_A = 0$ , we have

$$K_B + U_B = K_A + U_A \Rightarrow K_B + 0 = 0 + mgy_A$$

which yields  $K_B = 724$  J, and the corresponding speed is  $v = \sqrt{2K/m} = 4.9 \text{ m/s}$ .

(c) Expressed in terms of mass, we have

$$\begin{aligned} K_B + U_B &= K_A + U_A \Rightarrow \\ \frac{1}{2}mv_B^2 + mgy_B &= \frac{1}{2}mv_A^2 + mgy_A. \end{aligned}$$

Thus, the mass  $m$  cancels, and we observe that solving for speed does not depend on the value of mass (or weight).

111. (a) At the top of its flight, the vertical component of the velocity vanishes, and the horizontal component (neglecting air friction) is the same as it was when it was thrown. Thus,

$$K_{\text{top}} = \frac{1}{2}mv_x^2 = \frac{1}{2}(0.050\text{ kg})((8.0\text{ m/s})\cos 30^\circ)^2 = 1.2\text{ J}.$$

(b) We choose the point 3.0 m below the window as the reference level for computing the potential energy. Thus, equating the mechanical energy when it was thrown to when it is at this reference level, we have (with SI units understood)

$$mgy_0 + K_0 = K$$

$$m(9.8)(3.0) + \frac{1}{2}m(8.0)^2 = \frac{1}{2}mv^2$$

which yields (after canceling  $m$  and simplifying)  $v = 11\text{ m/s}$ .

(c) As mentioned,  $m$  cancels — and is therefore not relevant to that computation.

(d) The  $v$  in the kinetic energy formula is the magnitude of the velocity vector; it does not depend on the direction.

112. (a) The rate of change of the gravitational potential energy is

$$\frac{dU}{dt} = mg \frac{dy}{dt} = -mg|v| = -(68)(9.8)(59) = -3.9 \times 10^4 \text{ J/s.}$$

Thus, the gravitational energy is being reduced at the rate of  $3.9 \times 10^4 \text{ W}$ .

(b) Since the velocity is constant, the rate of change of the kinetic energy is zero. Thus the rate at which the mechanical energy is being dissipated is the same as that of the gravitational potential energy ( $3.9 \times 10^4 \text{ W}$ ).

113. The water has gained

$$\Delta K = \frac{1}{2} (10 \text{ kg})(13 \text{ m/s})^2 - \frac{1}{2} (10 \text{ kg})(3.2 \text{ m/s})^2 = 794 \text{ J}$$

of kinetic energy, and it has lost  $\Delta U = (10 \text{ kg})(9.8 \text{ m/s}^2)(15 \text{ m}) = 1470 \text{ J}$ .

of potential energy (the lack of agreement between these two values is presumably due to transfer of energy into thermal forms). The ratio of these values is  $0.54 = 54\%$ . The mass of the water cancels when we take the ratio, so that the assumption (stated at the end of the problem:  $m = 10 \text{ kg}$ ) is not needed for the final result.



114. (a) The integral (see Eq. 8-6, where the value of  $U$  at  $x = \infty$  is required to vanish) is straightforward. The result is  $U(x) = -Gm_1m_2/x$ .

(b) One approach is to use Eq. 8-5, which means that we are effectively doing the integral of part (a) all over again. Another approach is to use our result from part (a) (and thus use Eq. 8-1). Either way, we arrive at

$$W = \frac{G m_1 m_2}{x_1} - \frac{G m_1 m_2}{x_1 + d} = \frac{G m_1 m_2 d}{x_1(x_1 + d)} .$$

115. (a) During one second, the decrease in potential energy is

$$-\Delta U = mg(-\Delta y) = (5.5 \times 10^6 \text{ kg}) (9.8 \text{ m/s}^2) (50 \text{ m}) = 2.7 \times 10^9 \text{ J}$$

where  $+y$  is upward and  $\Delta y = y_f - y_i$ .

(b) The information relating mass to volume is not needed in the computation. By Eq. 8-40 (and the SI relation  $W = J/s$ ), the result follows:

$$P = (2.7 \times 10^9 \text{ J}) / (1 \text{ s}) = 2.7 \times 10^9 \text{ W}.$$

(c) One year is equivalent to  $24 \times 365.25 = 8766 \text{ h}$  which we write as  $8.77 \text{ kh}$ . Thus, the energy supply rate multiplied by the cost and by the time is

$$(2.7 \times 10^9 \text{ W})(8.77 \text{ kh}) \left( \frac{1 \text{ cent}}{1 \text{ kWh}} \right) = 2.4 \times 10^{10} \text{ cents} = \$2.4 \times 10^8.$$

116. (a) The kinetic energy  $K$  of the automobile of mass  $m$  at  $t = 30$  s is

$$K = \frac{1}{2}mv^2 = \frac{1}{2}(1500 \text{ kg}) \left( (72 \text{ km/h}) \left( \frac{1000 \text{ m/km}}{3600 \text{ s/h}} \right) \right)^2 = 3.0 \times 10^5 \text{ J}.$$

(b) The average power required is

$$P_{\text{avg}} = \frac{\Delta K}{\Delta t} = \frac{3.0 \times 10^5 \text{ J}}{30 \text{ s}} = 1.0 \times 10^4 \text{ W}.$$

(c) Since the acceleration  $a$  is constant, the power is  $P = Fv = mav = ma(at) = ma^2t$  using Eq. 2-11. By contrast, from part (b), the average power is  $P_{\text{avg}} = \frac{mv^2}{2t}$  which becomes  $\frac{1}{2}ma^2t$  when  $v = at$  is again utilized. Thus, the instantaneous power at the end of the interval is twice the average power during it:  $P = 2P_{\text{avg}} = (2)(1.0 \times 10^4 \text{ W}) = 2.0 \times 10^4 \text{ W}.$

117. (a) The remark in the problem statement that the forces can be associated with potential energies is illustrated as follows: the work from  $x = 3.00$  m to  $x = 2.00$  m is

$$W = F_2 \Delta x = (5.00 \text{ N})(-1.00 \text{ m}) = -5.00 \text{ J},$$

so the potential energy at  $x = 2.00$  m is  $U_2 = +5.00$  J.

(b) Now, it is evident from the problem statement that  $E_{\max} = 14.0$  J, so the kinetic energy at  $x = 2.00$  m is

$$K_2 = E_{\max} - U_2 = 14.0 - 5.00 = 9.00 \text{ J}.$$

(c) The work from  $x = 2.00$  m to  $x = 0$  is  $W = F_1 \Delta x = (3.00 \text{ N})(-2.00 \text{ m}) = -6.00$  J, so the potential energy at  $x = 0$  is

$$U_0 = 6.00 \text{ J} + U_2 = (6.00 + 5.00) \text{ J} = 11.0 \text{ J}.$$

(d) Similar reasoning to that presented in part (a) then gives

$$K_0 = E_{\max} - U_0 = (14.0 - 11.0) \text{ J} = 3.00 \text{ J}.$$

(e) The work from  $x = 8.00$  m to  $x = 11.0$  m is  $W = F_3 \Delta x = (-4.00 \text{ N})(3.00 \text{ m}) = -12.0$  J, so the potential energy at  $x = 11.0$  m is  $U_{11} = 12.0$  J.

(f) The kinetic energy at  $x = 11.0$  m is therefore

$$K_{11} = E_{\max} - U_{11} = (14.0 - 12.0) \text{ J} = 2.00 \text{ J}.$$

(g) Now we have  $W = F_4 \Delta x = (-1.00 \text{ N})(1.00 \text{ m}) = -1.00$  J, so the potential energy at  $x = 12.0$  m is

$$U_{12} = 1.00 \text{ J} + U_{11} = (1.00 + 12.0) \text{ J} = 13.0 \text{ J}.$$

(h) Thus, the kinetic energy at  $x = 12.0$  m is

$$K_{12} = E_{\max} - U_{12} = (14.0 - 13.0) = 1.00 \text{ J}.$$

(i) There is no work done in this interval (from  $x = 12.0$  m to  $x = 13.0$  m) so the answers are the same as in part (g):  $U_{12} = 13.0$  J.

(j) There is no work done in this interval (from  $x = 12.0$  m to  $x = 13.0$  m) so the answers are the same as in part (h):  $K_{12} = 1.00$  J.

(k) Although the plot is not shown here, it would look like a “potential well” with piecewise-sloping sides: from  $x = 0$  to  $x = 2$  (SI units understood) the graph of  $U$  is a decreasing line segment from 11 to 5, and from  $x = 2$  to  $x = 3$ , it then heads down to zero, where it stays until  $x = 8$ , where it starts increasing to a value of 12 (at  $x = 11$ ), and then in another positive-slope line segment it increases to a value of 13 (at  $x = 12$ ). For  $x > 12$  its value does not change (this is the “top of the well”).

(l) The particle can be thought of as “falling” down the  $0 < x < 3$  slopes of the well, gaining kinetic energy as it does so, and certainly is able to reach  $x = 5$ . Since  $U = 0$  at  $x = 5$ , then it’s initial potential energy (11 J) has completely converted to kinetic: now  $K = 11.0$  J.

(m) This is not sufficient to climb up and out of the well on the large  $x$  side ( $x > 8$ ), but does allow it to reach a “height” of 11 at  $x = 10.8$  m. As discussed in section 8-5, this is a “turning point” of the motion.

(n) Next it “falls” back down and rises back up the small  $x$  slopes until it comes back to its original position. Stating this more carefully, when it is (momentarily) stopped at  $x = 10.8$  m it is accelerated to the left by the force  $\vec{F}_3$ ; it gains enough speed as a result that it eventually is able to return to  $x = 0$ , where it stops again.

118. (a) At  $x = 5.00$  m the potential energy is zero, and the kinetic energy is

$$K = \frac{1}{2} mv^2 = \frac{1}{2} (2.00 \text{ kg})(3.45 \text{ m/s})^2 = 11.9 \text{ J}.$$

The total energy, therefore, is great enough to reach the point  $x = 0$  where  $U = 11.0$  J, with a little “left over” ( $11.9 \text{ J} - 11.0 \text{ J} = 0.9025 \text{ J}$ ). This is the kinetic energy at  $x = 0$ , which means the speed there is

$$v = \sqrt{2(0.9025 \text{ J})/(2 \text{ kg})} = 0.950 \text{ m/s}.$$

It has now come to a stop, therefore, so it has not encountered a turning point.

(b) The total energy (11.9 J) is equal to the potential energy (in the scenario where it is initially moving rightward) at  $x = 10.9756 \approx 11.0$  m. This point may be found by interpolation or simply by using the work-kinetic-energy theorem:

$$K_f = K_i + W = 0 \Rightarrow 11.9025 + (-4)d = 0 \Rightarrow d = 2.9756 \approx 2.98$$

(which when added to  $x = 8.00$  [the point where  $F_3$  begins to act] gives the correct result). This provides a turning point for the particle's motion.

119. (a) During the final  $d = 12$  m of motion, we use

$$K_1 + U_1 = K_2 + U_2 + f_k d$$

$$\frac{1}{2}mv^2 + 0 = 0 + 0 + f_k d$$

where  $v = 4.2$  m/s. This gives  $f_k = 0.31$  N. Therefore, the thermal energy change is  $f_k d = 3.7$  J.

(b) Using  $f_k = 0.31$  N we obtain  $f_k d_{\text{total}} = 4.3$  J for the thermal energy generated by friction; here,  $d_{\text{total}} = 14$  m.

(c) During the initial  $d' = 2$  m of motion, we have

$$K_0 + U_0 + W_{\text{app}} = K_1 + U_1 + f_k d' \Rightarrow 0 + 0 + W_{\text{app}} = \frac{1}{2}mv^2 + 0 + f_k d'$$

which essentially combines Eq. 8-31 and Eq. 8-33. This leads to the result  $W_{\text{app}} = 4.3$  J, and — reasonably enough — is the same as our answer in part (b).

120. (a) The table shows that the force is  $+(3.0 \text{ N})\hat{i}$  while the displacement is in the  $+x$  direction ( $\vec{d} = +(3.0 \text{ m})\hat{i}$ ), and it is  $-(3.0 \text{ N})\hat{i}$  while the displacement is in the  $-x$  direction. Using Eq. 7-8 for each part of the trip, and adding the results, we find the work done is 18 J. This is not a conservative force field; if it had been, then the net work done would have been zero (since it returned to where it started).

(b) This, however, is a conservative force field, as can be easily verified by calculating that the net work done here is zero.

(c) The two integrations that need to be performed are each of the form  $\int 2x \, dx$  so that we are adding two equivalent terms, where each equals  $x^2$  (evaluated at  $x = 4$ , minus its value at  $x = 1$ ). Thus, the work done is  $2(4^2 - 1^2) = 30 \text{ J}$ .

(d) This is another conservative force field, as can be easily verified by calculating that the net work done here is zero.

(e) The forces in (b) and (d) are conservative.



121. We use Eq. 8-20.

(a) The force at  $x = 2.0$  m is

$$F = -\frac{dU}{dx} \approx -\frac{-(17.5 \text{ J}) - (-2.8 \text{ J})}{4.0 \text{ m} - 1.0 \text{ m}} = 4.9 \text{ N}.$$

(b) The force points in the  $+x$  direction (but there is some uncertainty in reading the graph which makes the last digit not very significant).

(c) The total mechanical energy at  $x = 2.0$  m is

$$E = \frac{1}{2}mv^2 + U \approx \frac{1}{2}(2.0)(-1.5)^2 - 7.7 = -5.5$$

in SI units (Joules). Again, there is some uncertainty in reading the graph which makes the last digit not very significant. At that level ( $-5.5$  J) on the graph, we find two points where the potential energy curve has that value — at  $x \approx 1.5$  m and  $x \approx 13.5$  m. Therefore, the particle remains in the region  $1.5 < x < 13.5$  m. The left boundary is at  $x = 1.5$  m.

(d) From the above results, the right boundary is at  $x = 13.5$  m.

(e) At  $x = 7.0$  m, we read  $U \approx -17.5$  J. Thus, if its total energy (calculated in the previous part) is  $E \approx -5.5$  J, then we find

$$\frac{1}{2}mv^2 = E - U \approx 12 \text{ J} \Rightarrow v = \sqrt{\frac{2}{m}(E - U)} \approx 3.5 \text{ m/s}$$

where there is certainly room for disagreement on that last digit for the reasons cited above.

122. The connection between angle  $\theta$  (measured from vertical) and height  $h$  (measured from the lowest point, which is our choice of reference position in computing the gravitational potential energy) is given by  $h = L(1 - \cos \theta)$  where  $L$  is the length of the pendulum.

(a) We use energy conservation in the form of Eq. 8-17.

$$K_1 + U_1 = K_2 + U_2$$

$$0 + mgL(1 - \cos \theta_1) = \frac{1}{2}mv_2^2 + mgL(1 - \cos \theta_2)$$

With  $L = 1.4$  m,  $\theta_1 = 30^\circ$ , and  $\theta_2 = 20^\circ$ , we have

$$v_2 = \sqrt{2gL(\cos \theta_2 - \cos \theta_1)} = 1.4 \text{ m/s}.$$

(b) The maximum speed  $v_3$  is at the lowest point. Our formula for  $h$  gives  $h_3 = 0$  when  $\theta_3 = 0^\circ$ , as expected. From

$$K_1 + U_1 = K_3 + U_3$$

$$0 + mgL(1 - \cos \theta_1) = \frac{1}{2}mv_3^2 + 0$$

we obtain  $v_3 = 1.9$  m/s.

(c) We look for an angle  $\theta_4$  such that the speed there is  $v_4 = v_3/3$ . To be as accurate as possible, we proceed algebraically (substituting  $v_3^2 = 2gL(1 - \cos \theta_1)$  at the appropriate place) and plug numbers in at the end. Energy conservation leads to

$$K_1 + U_1 = K_4 + U_4$$

$$0 + mgL(1 - \cos \theta_1) = \frac{1}{2}mv_4^2 + mgL(1 - \cos \theta_4)$$

$$mgL(1 - \cos \theta_1) = \frac{1}{2}m\frac{v_3^2}{9} + mgL(1 - \cos \theta_4)$$

$$-gL \cos \theta_1 = \frac{1}{2}\frac{2gL(1 - \cos \theta_1)}{9} - gL \cos \theta_4$$

where in the last step we have subtracted out  $mgL$  and then divided by  $m$ . Thus, we obtain

$$\theta_4 = \cos^{-1}\left(\frac{1}{9} + \frac{8}{9}\cos \theta_1\right) = 28.2^\circ \approx 28^\circ.$$

123. Converting to SI units,  $v_0 = 8.3 \text{ m/s}$  and  $v = 11.1 \text{ m/s}$ . The incline angle is  $\theta = 5.0^\circ$ . The height difference between the car's highest and lowest points is  $(50 \text{ m}) \sin \theta = 4.4 \text{ m}$ . We take the lowest point (the car's final reported location) to correspond to the  $y = 0$  reference level.

(a) Using Eq. 8-31 and Eq. 8-33, we find

$$f_k d = -\Delta K - \Delta U \Rightarrow f_k d = \frac{1}{2} m (v_0^2 - v^2) + mgy_0 .$$

Therefore, the mechanical energy reduction (due to friction) is  $f_k d = 2.4 \times 10^4 \text{ J}$ .

(b) With  $d = 50 \text{ m}$ , we solve for  $f_k$  and obtain  $4.7 \times 10^2 \text{ N}$ .

124. Equating the mechanical energy at his initial position (as he emerges from the canon, where we set the reference level for computing potential energy) to his energy as he lands, we obtain

$$K_i = K_f + U_f$$

$$\frac{1}{2}(60\text{ kg})(16\text{ m/s})^2 = K_f + (60\text{ kg})(9.8\text{ m/s}^2)(3.9\text{ m})$$

which leads to  $K_f = 5.4 \times 10^3\text{ J}$ .


125. (a) The compression is “spring-like” so the maximum force relates to the distance  $x$  by Hooke's law:

$$F_x = kx \Rightarrow x = \frac{750}{2.5 \times 10^5} = 0.0030 \text{ m.}$$

(b) The work is what produces the “spring-like” potential energy associated with the compression. Thus, using Eq. 8-11,

$$W = \frac{1}{2} kx^2 = \frac{1}{2} (2.5 \times 10^5) (0.0030)^2 = 1.1 \text{ J.}$$

(c) By Newton's third law, the force  $F$  exerted by the tooth is equal and opposite to the “spring-like” force exerted by the licorice, so the graph of  $F$  is a straight line of slope  $k$ . We plot  $F$  (in newtons) versus  $x$  (in millimeters); both are taken as positive.

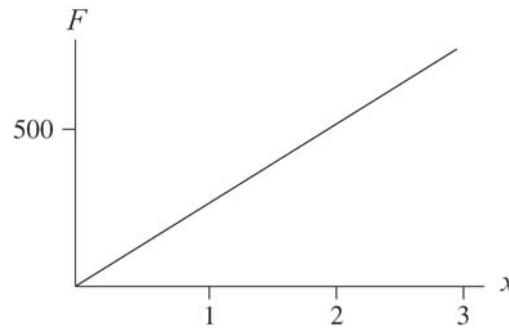

(d) As mentioned in part (b), the spring potential energy expression is relevant. Now, whether or not we can ignore dissipative processes is a deeper question. In other words, it seems unlikely that — if the tooth at any moment were to reverse its motion — that the licorice could “spring back” to its original shape. Still, to the extent that  $U = \frac{1}{2} kx^2$  applies, the graph is a parabola (not shown here) which has its vertex at the origin and is either concave upward or concave downward depending on how one wishes to define the sign of  $F$  (the connection being  $F = -dU/dx$ ).

(e) As a crude estimate, the area under the curve is roughly half the area of the entire plotting-area (8000 N by 12 mm). This leads to an approximate work of

$$\frac{1}{2} (8000 \text{ N}) (0.012 \text{ m}) \approx 50 \text{ J. Estimates in the range } 40 \leq W \leq 50 \text{ J are acceptable.}$$

(f) Certainly dissipative effects dominate this process, and we cannot assign it a meaningful potential energy.

126. (a) This part is essentially a free-fall problem, which can be easily done with Chapter 2 methods. Instead, choosing energy methods, we take  $y = 0$  to be the ground level.

$$K_i + U_i = K + U \Rightarrow 0 + mgy_i = \frac{1}{2}mv^2 + 0$$

Therefore  $v = \sqrt{2gy_i} = 9.2 \text{ m/s}$ , where  $y_i = 4.3 \text{ m}$ .

(b) Eq. 8-29 provides  $\Delta E_{\text{th}} = f_k d$  for thermal energy generated by the kinetic friction force. We apply Eq. 8-31:

$$K_i + U_i = K + U \Rightarrow 0 + mgy_i = \frac{1}{2}mv^2 + 0 + f_k d .$$

With  $d = y_i$ ,  $m = 70 \text{ kg}$  and  $f_k = 500 \text{ N}$ , this yields  $v = 4.8 \text{ m/s}$ .

127. (a) When there is no change in potential energy, Eq. 8-24 leads to

$$W_{\text{app}} = \Delta K = \frac{1}{2} m (v^2 - v_0^2).$$

Therefore,  $\Delta E = 6.0 \times 10^3 \text{ J}$ .

(b) From the above manipulation, we see  $W_{\text{app}} = 6.0 \times 10^3 \text{ J}$ . Also, from Chapter 2, we know that  $\Delta t = \Delta v/a = 10 \text{ s}$ . Thus, using Eq. 7-42,

$$P_{\text{avg}} = \frac{W}{\Delta t} = \frac{6.0 \times 10^3}{10} = 600 \text{ W}.$$

(c) and (d) The constant applied force is  $ma = 30 \text{ N}$  and clearly in the direction of motion, so Eq. 7-48 provides the results for instantaneous power

$$P = \vec{F} \cdot \vec{v} = \begin{cases} 300 \text{ W} & \text{for } v = 10 \text{ m/s} \\ 900 \text{ W} & \text{for } v = 30 \text{ m/s} \end{cases}$$

We note that the average of these two values agrees with the result in part (b).

128. The distance traveled up the incline can be figured with Chapter 2 techniques:  $v^2 = v_0^2 + 2a\Delta x \rightarrow \Delta x = 200 \text{ m}$ . This corresponds to an increase in height equal to  $y = (200 \text{ m}) \sin \theta = 17 \text{ m}$ , where  $\theta = 5.0^\circ$ . We take its initial height to be  $y = 0$ .

(a) Eq. 8-24 leads to

$$W_{\text{app}} = \Delta E = \frac{1}{2} m (v^2 - v_0^2) + mgy .$$

Therefore,  $\Delta E = 8.6 \times 10^3 \text{ J}$ .

(b) From the above manipulation, we see  $W_{\text{app}} = 8.6 \times 10^3 \text{ J}$ . Also, from Chapter 2, we know that  $\Delta t = \Delta v/a = 10 \text{ s}$ . Thus, using Eq. 7-42,

$$P_{\text{avg}} = \frac{W}{\Delta t} = \frac{8.6 \times 10^3}{10} = 860 \text{ W}$$

where the answer has been rounded off (from the 856 value that is provided by the calculator).

(c) and (d) Taking into account the component of gravity along the incline surface, the applied force is  $ma + mg \sin \theta = 43 \text{ N}$  and clearly in the direction of motion, so Eq. 7-48 provides the results for instantaneous power

$$P = \vec{F} \cdot \vec{v} = \begin{cases} 430 \text{ W} & \text{for } v = 10 \text{ m/s} \\ 1300 \text{ W} & \text{for } v = 30 \text{ m/s} \end{cases}$$

where these answers have been rounded off (from 428 and 1284, respectively). We note that the average of these two values agrees with the result in part (b).



129. We want to convert (at least in theory) the water that falls through  $h = 500$  m into electrical energy. The problem indicates that in one year, a volume of water equal to  $A\Delta z$  lands in the form of rain on the country, where  $A = 8 \times 10^{12} \text{ m}^2$  and  $\Delta z = 0.75 \text{ m}$ . Multiplying this volume by the density  $\rho = 1000 \text{ kg/m}^3$  leads to

$$m_{\text{total}} = \rho A \Delta z = (1000)(8 \times 10^{12})(0.75) = 6 \times 10^{15} \text{ kg}$$

for the mass of rainwater. One-third of this “falls” to the ocean, so it is  $m = 2 \times 10^{15} \text{ kg}$  that we want to use in computing the gravitational potential energy  $mgh$  (which will turn into electrical energy during the year). Since a year is equivalent to  $3.2 \times 10^7 \text{ s}$ , we obtain

$$P_{\text{avg}} = \frac{(2 \times 10^{15})(9.8)(500)}{3.2 \times 10^7} = 3.1 \times 10^{11} \text{ W}.$$

130. The spring is relaxed at  $y = 0$ , so the elastic potential energy (Eq. 8-11) is  $U_{\text{el}} = \frac{1}{2}ky^2$ . The total energy is conserved, and is zero (determined by evaluating it at its initial position). We note that  $U$  is the same as  $\Delta U$  in these manipulations. Thus, we have

$$0 = K + U_g + U_e \Rightarrow K = -U_g - U_e$$

where  $U_g = mgy = (20 \text{ N})y$  with  $y$  in meters (so that the energies are in Joules). We arrange the results in a table:

position $y$	-0.05	-0.10	-0.15	-0.20
$K$	(a) 0.75	(d) 1.0	(g) 0.75	(j) 0
$U_g$	(b) -1.0	(e) -2.0	(h) -3.0	(k) -4.0
$U_e$	(c) 0.25	(f) 1.0	(i) 2.25	(l) 4.0

131. The power generation (assumed constant, so average power is the same as instantaneous power) is

$$P = \frac{mgh}{t} = \frac{(3/4)(1200 \text{ m}^3)(10^3 \text{ kg/m}^3)(9.8 \text{ m/s}^2)(100 \text{ m})}{1.0 \text{ s}} = 8.80 \times 10^8 \text{ W}.$$

132. The style of reasoning used here is presented in §8-5.

(a) The horizontal line representing  $E_1$  intersects the potential energy curve at a value of  $r \approx 0.07$  nm and seems not to intersect the curve at larger  $r$  (though this is somewhat unclear since  $U(r)$  is graphed only up to  $r = 0.4$  nm). Thus, if  $m$  were propelled towards  $M$  from large  $r$  with energy  $E_1$  it would “turn around” at 0.07 nm and head back in the direction from which it came.

(b) The line representing  $E_2$  has two intersection points  $r_1 \approx 0.16$  nm and  $r_2 \approx 0.28$  nm with the  $U(r)$  plot. Thus, if  $m$  starts in the region  $r_1 < r < r_2$  with energy  $E_2$  it will bounce back and forth between these two points, presumably forever.

(c) At  $r = 0.3$  nm, the potential energy is roughly  $U = -1.1 \times 10^{-19}$  J.

(d) With  $M \gg m$ , the kinetic energy is essentially just that of  $m$ . Since  $E = 1 \times 10^{-19}$  J, its kinetic energy is  $K = E - U \approx 2.1 \times 10^{-19}$  J.

(e) Since force is related to the slope of the curve, we must (crudely) estimate  $|F| \approx 1 \times 10^{-9}$  N at this point. The sign of the slope is positive, so by Eq. 8-20, the force is negative-valued. This is interpreted to mean that the atoms are attracted to each other.

(f) Recalling our remarks in the previous part, we see that the sign of  $F$  is positive (meaning it's repulsive) for  $r < 0.2$  nm.

(g) And the sign of  $F$  is negative (attractive) for  $r > 0.2$  nm.

(h) At  $r = 0.2$  nm, the slope (hence,  $F$ ) vanishes.

133. (a) Sample Problem 8-3 illustrates simple energy conservation in a similar situation, and derives the frequently encountered relationship:  $v = \sqrt{2gh}$ . In our present problem, the height change is equal to the rod length  $L$ . Thus, using the suggested notation for the speed, we have  $v_0 = \sqrt{2gL}$ .

(b) At  $B$  the speed is (from Eq. 8-17)

$$v = \sqrt{v_0^2 + 2gL} = \sqrt{4gL}.$$


The direction of the centripetal acceleration ( $v^2/r = 4gL/L = 4g$ ) is upward (at that moment), as is the tension force. Thus, Newton's second law gives

$$T - mg = m(4g) \Rightarrow T = 5mg.$$


(c) The difference in height between  $C$  and  $D$  is  $L$ , so the "loss" of mechanical energy (which goes into thermal energy) is  $-mgL$ .

(d) The difference in height between  $B$  and  $D$  is  $2L$ , so the total "loss" of mechanical energy (which all goes into thermal energy) is  $-2mgL$ .

134. (a) The force (SI units understood) from Eq. 8-20 is plotted in the graph below.

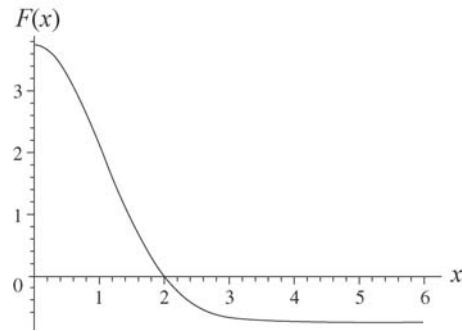

(b) The potential energy  $U(x)$  and the kinetic energy  $K(x)$  are shown in the next. The potential energy curve begins at 4 and drops (until about  $x = 2$ ); the kinetic energy curve is the one that starts at zero and rises (until about  $x = 2$ ).

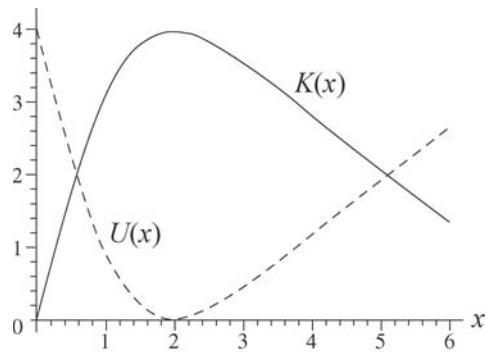

135. Let the amount of stretch of the spring be  $x$ . For the object to be in equilibrium

$$kx - mg = 0 \Rightarrow x = mg/k.$$

Thus the gain in elastic potential energy for the spring is

$$\Delta U_e = \frac{1}{2} kx^2 = \frac{1}{2} k \left( \frac{mg}{k} \right)^2 = \frac{m^2 g^2}{2k}$$

while the loss in the gravitational potential energy of the system is

$$-\Delta U_g = mgx = mg \left( \frac{mg}{k} \right) = \frac{m^2 g^2}{k}$$

which we see (by comparing with the previous expression) is equal to  $2\Delta U_e$ . The reason why  $|\Delta U_g| \neq \Delta U_e$  is that, since the object is slowly lowered, an upward external force (e.g., due to the hand) must have been exerted on the object during the lowering process, preventing it from accelerating downward. This force does *negative* work on the object, reducing the total mechanical energy of the system.